

Sensor operated solid brass electronic Lavatory Faucet activated by an infrared sensor. Powered by an internally mounted 9V battery and with a filtered latching solenoid valve which are both internally mounted in the faucet body. To be used with cold or premixed water. Sensor range is manually adjustable and by an "OPTIONAL" remote control. Other sensor settings (Sensor range, delay in, delay out and security time) can also be adjusted by the remote control. Faucet will automatically shut-off after 90 seconds and has a low battery level indicator. Faucet is supplied with a vandal resistant 0.5 GPM aerator.

Use:

Touch free electronic faucet is ADA Compliant. The faucet is activated automatically when the user brings his or her hands within the sensor range.

Applications:

Ideal for offices, restaurants, stadiums or for any commercial application.

Installation:

Lavatory mounted.

Water supply:

Cold or premixed water (1 inlet).

Water temperature:

Max 158°.

Power source:

9V Lithium battery, internally mounted.

Operating pressure:


(7 - 116 PSI).

Warranty:

2 years.

Variations

- DP4 – Deckplate 4" Centers
- SF1555 – Remote Control
- MM – Mechanical Mixing Valve

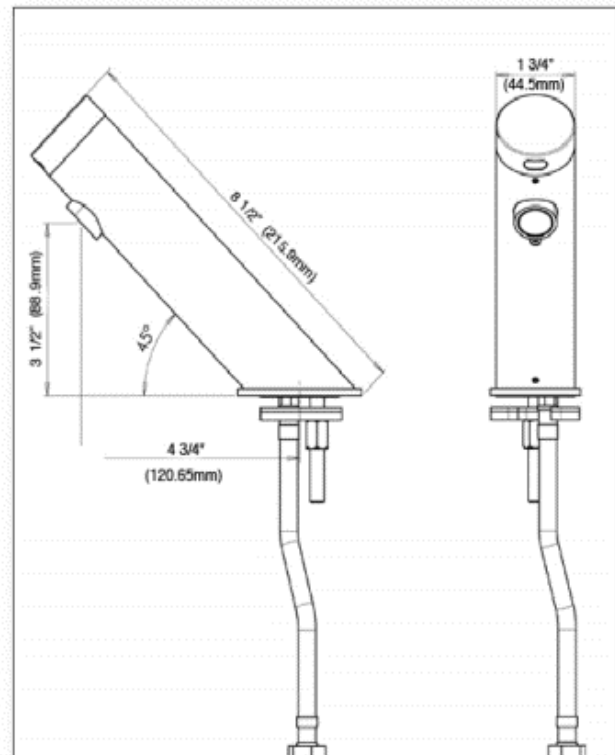

ASME A112.18.1-2011/CSA B125.1-11
including Update No. 1 dated November 2011

INFINITE go green
Having no boundaries or limits



01/01/15