

Specifications

- Wattage - 112W/168W
- Weight - 20 lbs
- Input Total Power - 123W/179W
- Lumens - 13500/17030@ 4500 Kelvin
- Luminated Area - 20ft: 85ft x 85ft ;24ft : 118ft x 118ft ; 30ft : 138ft x 138ft
- Illuminance Uniformity - >0.6
- Input Voltage - 110/115-220/277/480
- Input Voltage - ≥90%
- Current - Single 325 mA
- Meanwell Drivers - HLG-150H/HLG-185H
- LED Single Power - 1.5W
- Lumen Per Watt - ≥110Lm/W
- Environmental Temperature - 95F~122F
- Lamp Temperature - <122F
- Efficiency - >90%
- CRI - >70
- Power Factor - >0.95
- IP - IP65

Features

- COOL-LITE MODERN LED FIXTURES are the perfect solution for illuminating any parking area.
- Our high-performance technology is encased in sleek, aesthetically appealing housing, rendering optimum results.
- Five Kelvin options to choose from: 3000k or 3500k, 4000k or 4500k, 5000k for allowing the best choice for each application.
- 5 year warranty.




Ordering Information

EXAMPLE: GL-SE-112W-4K-<277V-T2-01

Smart Sensor	Wattage	Kelvin	Voltage	Lens	Colors
SE (Smart)	112W	3k or 3.5k	227V	T2	01 (Gray)
None (Standard)	168W	4k or 4.5k	480V	T3	02 (Brown)
		5k		T5	03 (White)
					04 (Black)
					05 (Bronze)

Photometrics Showing Type-2, 3 & 5 Distribution

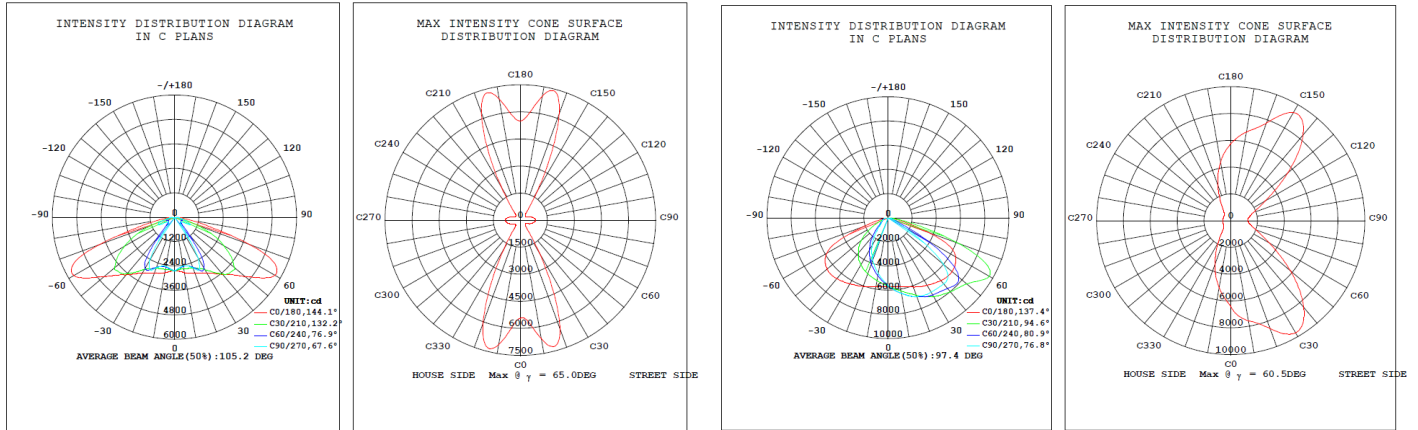


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Fq
Test Date: 2012-07-30

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.262
Humidity: 65.0%
Test Distance: 9.970m [K=1.0000]
Remarks: 112W GLC-LD02

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: Fq
Test Date: 2015-11-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.262
Humidity: 65.0%
Test Distance: 9.970m [K=1.0000]
Remarks:

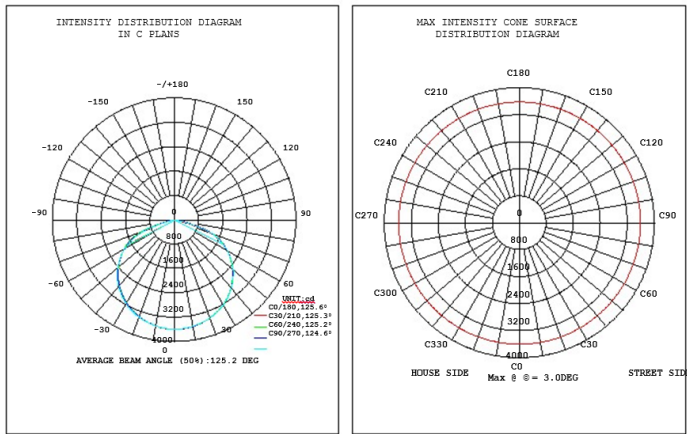

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Test Date: 2014-04-26

© Range: 0 - 90DEG
© Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.262
Humidity: 65.0%
Test Distance: 9.970m [K=1.0000]