



Runner
SIZE 19 1/4" x 44 3/4"



Nicole Tamarin

Designed by: Shannon Ownby



24502-A




21520-E




24502-O



24499-F



24502-G



24500-A

Cutting Requirements

WOF - Width of Fabric (cut selvage to selvage).

LOF - Length of Fabric (cut parallel to selvage).

RST - Right sides of fabric together.

Fabric A: 24502-A Light brown leaf blender

- Cut (1) strip 1 1/2" x **WOF**. Sub cut (12) 1 1/2" squares.
- Cut (1) strip 2 7/8" x **WOF**. Sub cut (12) 2 7/8" squares. Cut 6 of those squares on one diagonal:



- Cut (3) **WOF** 1 1/2" strips.
Unit A1- cut (12) 8 1/2" x 1 1/2" rectangles.
Unit A2- cut (2) 1 1/2" squares.
- Cut (4) **WOF** 2 1/2" strips for binding.

FABRIC REQUIREMENTS	
Design	Yards
24502-A	5/8
21520-E	3/4
24502-O	1/8
24502-G	1/8
24500-A	1/4
24499-F (backing)	1 1/2

Fabric B: 21520-E

- Cut (2) strips 1 1/2" x **WOF**. Sub cut (12) 1 1/2" squares and (12) 2 1/2" x 1 1/2" rectangles.
- Cut (1) strip 3 1/4" x **WOF**. Sub cut (6) 3 1/4" squares. Cut on both diagonals:



- Cut (1) **WOF** 12 1/2" strip. Subcut:
Unit B1- cut (1) 12 1/2" square.
Cut on both diagonals:



- Unit B2- cut (2) 6 1/2" squares.
Cut on one diagonal:



- Unit B3- cut (2) 2 5/8" squares.
Cut on both diagonals:



- Cut (3) **WOF** 1 1/2" strips. Sub cut (2) 13 1/4" x 1 1/2" rectangles and cut (2) 40 5/8" x 1 1/2" rectangles.

Fabric C: 24502-O Orange leaf blender

- Cut (1) strip 2 7/8" x **WOF**. Sub cut (12) 2 7/8" squares. Mark diagonal line on wrong side of 6 of the squares. Cut other 6 squares on one diagonal:



Fabric D: 24502-G Green leaf blender

- Cut (1) strip 1 7/8" x **WOF**. Sub Cut (12) 1 7/8" squares.

Fabric E: 24500-A Brown acorn and leaf toss

- Cut (3) **WOF** 2 1/2" strips for border.

Fabric F: 24499-F Forest Packed Leaves

Block Construction

Note: Please read all instructions before beginning. $\frac{1}{4}$ " seam allowances assumed in all piecing and yardage requirements.


1. Stitch Fabric A, $1\frac{1}{2}$ " square & Fabric B, $1\frac{1}{2}$ " square. Make 12 units. Press toward Fabric A



2. Stitch unit from Step 1 to $2\frac{1}{2}$ " x $1\frac{1}{2}$ " rectangle of Fabric A. Make six of each layout. Press toward rectangle. Squares should measure 2.5"




3. Layer $2\frac{7}{8}$ " Fabric A square **RST** with $2\frac{7}{8}$ " Fabric C square, **RST**. Stitch on each side of drawn diagonal line. Cut diagonal line. Press toward Fabric A. Make 6 sets for a total of 12 HST squares. Squares should measure $2\frac{1}{2}$ "

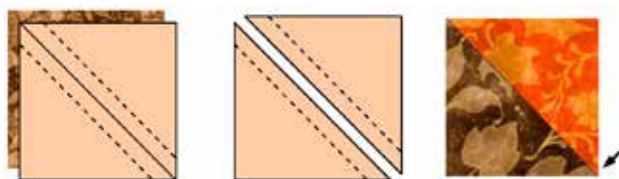

4. Assemble pinwheel block from Step 3 units.

Press as noted. Square should measure $4\frac{1}{2}$ ".



5. Stitch Fabric B triangle units to Fabric D square. Press toward triangle with caution not to distort unit. Make 12 sets.



6. Stitch Fabric A triangle to left side of unit from Step 5. Press toward Fabric A with caution not to distort unit. Make 12 sets.



7. Stitch Fabric C triangle to right side of unit from Step 6. Press toward Fabric C with caution not to distort unit. Make 12 sets. Square up unit to $2\frac{1}{2}$ " x $4\frac{1}{2}$ " taking care to preserve $\frac{1}{4}$ " seam allowances at top and bottom of center square.



8. Block assemblies in 3 rows. Top & bottom row are identical. Stitch 1 of each units from Step 2 to each side of unit from Step 7. Note placement of Fabric A square as you stitch. Make 6 units. Press as noted.



9. Stitch unit from Step 7 to each side of pinwheel unit from Step 4. Make 3 units.



10. Stitch 3 rows together. Make 3 units. Block should measure 8 1/2"



Construction-Table runner will assemble On-Point (in a diagonal fashion)


1. Stitch triangle B3 to each end of sashing A1. Make 2 sets. Press as noted.




2. Stitch triangle B3 to end of sashing A1. Then stitch A2, A1 and B3 as shown. Make 2 sets. Press as noted.




3. Stitch (2) A1 sashing strips to blocks, on opposite sides. Make 3. Press toward sashing.



4. Stitch B2 triangle to one sashed side of unit from Step 3. Stitch B1 triangle to opposite side. Press toward sashing. Make 2 units

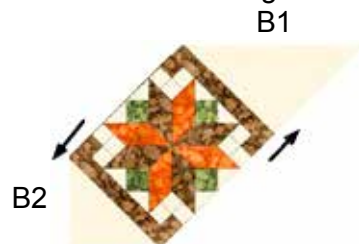


5. Stitch B1 triangle to each sashed side of unit from Step 3. Press toward sashing. Make 1.



Assemble Diagonal Rows

6. Using units from prior steps (noted by numbers below), stitch rows RST. Press toward sashing.

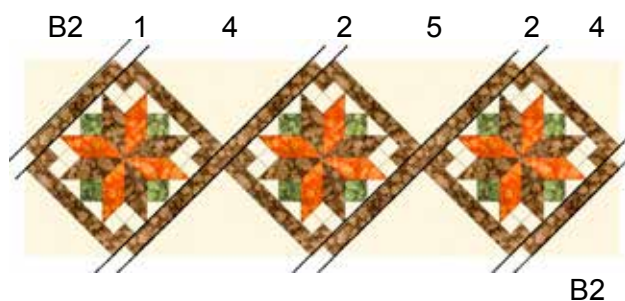

7. Attach first border, Fabric B. Stitch 13 1/4" x 1 1/2" border strips to each short end of runner center from Step 6. Press toward border.



8. Stitch Fabric B 40 5/8" x 1 1/2" rectangles to each long edge of runner center. Press toward border.





Prepare Final Border Strips.

Fabric E- Stitch **RST**, (3) 2 1/2" **WOF** strips together on short end, making 2 1/2" x approximately 120" strip.

Subcut (2) 15 1/4" x 2 1/2" and (2) 44 5/8" x 2 1/2" strips.

9. Stitch 15 1/4" border strips to each short end of runner center from Step 8. Press toward border



10. Stitch 44 5/8" border strips to each long edge of runner from Step 9. Press toward border.



Finishing

1. Press backing.
2. Layer quilt top, batting and backing. Quilt as desired.
3. Trim layers even with quilt top.
4. Prepare and attach binding (Fabric A) strips, using your preferred method.