

HDMI MATRIX

MATRIX SIMPLE

The **Matrix Switch** is a perfect solution for connecting multiple AV devices to display with limited **HDMI** ports

4Kx2K HDMI Matrix with remote


The 299-HX Matrix can connect four/ eight devices to two/ four/ eight separate displays and control each device independently with the included handheld remote. And any output port can realize independent audio output by optical fiber or stereo head phone.

299-HX42U [4x2 Matrix]

- HDMI 1.4b, 3D video format
- Support 3.2Gbps data rate for tmds clock up to 320MHz
- Highest video resolution 4096x2160@30Hz
- Support 8/ 10/ 12 bit deep color
- HDMI input/ output distance over 10m at 4K resolution
- Support single HD display for multiple sources, such as DVD Players and HD player, PS4, STB
- Remote control for operational flexibility & easy to control

other available models

299-HX44U [4x4 Matrix]

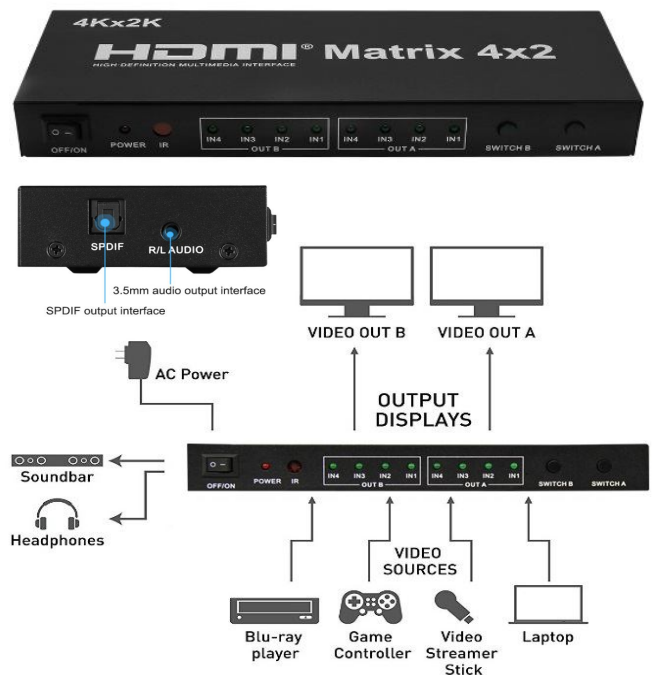

2x2 HDMI v1.4 Switch/ Splitter 3D with remote

It is a HDMI combination of 1x2 splitter and 2x1 switch. With high quality performance connection between two sources and two video displays without signal degradation. It supports **4Kx2K/ 1080P** full HD video and support video color format: **deep color 8/10/12 bit**.

In supporting **3D** video, all units connected to the splitter outputs must support 3D). Its heavy-duty cool metal enclosure protects the insides and keeps the unit cool by aiding in quick heat absorption and dissipation.

- Support 8/10/12 bit deep color
- Support Supported compressed audio (DTS-HD, Dolby-True HD, LPCM7.1/ DTS, Dolby-AC3, DSD)
- LED indicates signal & power mode
- Manual and IR remote control in switching input sources
- Power supply: DC 5V
- 128x53x20mm

201-504-622U [4Kx2K]

- > Up to 3840x2160@30Hz
- > Support TMDS clock 320MHz max.



201-504-622 [1080p]

- > Up to 1920x1080p@60Hz
- > Support TMDS clock 225MHz max

