
Energy Management Training Systems

Educational Training Equipment for the 21st Century

Bulletin 239-203B

Hampden H-MZBM-J2A Multi-Zone Building Energy Management Trainer



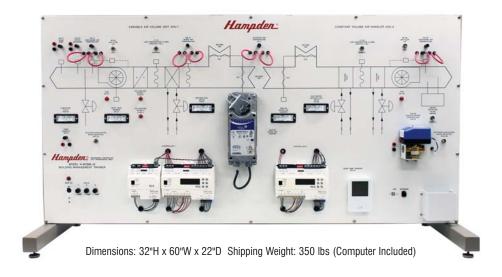

Purpose

The **H-MZBM-J2A** Multi-Zone Building Energy Management Trainer provides a means for training students in the installation, operation, and troubleshooting of a variable air volume unit and a constant volume air handler.

The control system allows on-screen menuprompting displays and operator responses. The controller is used to permit the operator to control every phase of the Energy Management process.

Features

- Wireless Control
- · State-of-the-art Johnson Controls
- Remote Computer Communications
- Programmable
- Simulated Fault Conditions Five Selectable
- Logic Displays
- · Selectable Loads and Environments
- . Safety Access to 24V AC only
- Courseware Student & Instructor
- Facility Explorer Software

PC Specifications (minimum requirements)

- Windows® OS
- USB Port
- 10' straight through cable

Specifications

The following factory wired components are mounted on a sturdy steel equipment/display panel with rear access cover.

Actual Components:

- Johnson Controls Facility Explorer Controllers (2)
- Johnson Controls Temperature Sensor
- Johnson Controls Actuator Electric Spring Return
- Johnson Controls 3-way Control Valve
- · Johnson Controls WiFi Gateway
- Johnson Controls Facility Explorer Software
- Johnson Controls Expansion I/O Module
- Johnson Controls DC Power Supply
- Digital Multimeter

- Test Points
- . H-LTCS Laptop Computer

Simulated Components:

- Smoke Detector
- Fan on Indicators
- DX Cooling Coils
- Static Pressure Control
- Supply Air Temperature Control
- Air Flow Switches
- Freezstat Switches
- Mixed Air Temperature Controls
- Outdoor Air Temperature Control
- Supply Air Humidity Control
- Room Relative Humidity Control
- Occupied/Unoccupied Mode Switches
- Damper/Valve Position Indicators

Input Power:

 120V.AC-1Ø-50/60Hz-15 ampere (Circuit Breaker Protected)

All Hampden units are available for operation at any voltage or frequency





071423