



**CONTRACTOR TOUGH**  
**SITE PREP // PLACING // FINISHING // PAVING EQUIPMENT**





AEC Factory & Headquarters in Paragould, Arkansas

## HERITAGE OF ENGINEERING EXCELLENCE

Allen Engineering Corporation (AEC) was founded in 1964, by Dewayne and Mary Ann Allen in Piggott, Arkansas. For over 50 years, our company has been involved in various aspects of the concrete industry. Our company began as a ready-mix concrete and aggregate producer. We later operated as a concrete pumper as well as a concrete contractor. Today, Allen Engineering is a designer, manufacturer, and marketer of the Allen® line of concrete and related equipment.



Our product line represents a complete system for the site-prep, placing, finishing and paving of all types of concrete. We design and build each piece of Allen Equipment to be “contractor tough.” Furthermore, Allen Equipment is specifically designed to help improve concrete floor flatness (as measured by F-Numbers), and improve daily production (as measured by profit numbers).

Allen Engineering has maintained a leading role in the evolution of high tolerance concrete floors around the world. AEC is one of the few manufacturers of concrete equipment with a sales force certified in F-Numbers. Allen Engineering counts many of the major concrete contractors from around the world as satisfied owners of our equipment.

We’re as proud of our people and our engineering as we are of the machines we build. From the very first truss screed, our name has included ‘engineering.’ It’s been our commitment to deliver products that don’t just perform at their highest level, they’re built to stand up to the demands of the most difficult environments and job sites. That combination of





Team Allen at 50th Anniversary

precision engineering of sophisticated machines—coupled with the brute strength of heavy-gauge steel, welded frames and high-performance power—has served Allen Engineering well for more than 50 years and two generations of family management and ownership (we're still family owned and headquartered in Paragould, Arkansas, USA).

Today we're investing in new products and new manufacturing muscle to build them. We're so confident in our 'built-to-last' core principle and engineering innovation, that we're grooming the third generation of Allens to continue our tradition of building excellence.

Allen Engineering is a fully integrated equipment designer and manufacturer.

Our in-house operations include equipment design, engineering, prototype, testing, CNC machining, metal fabrication, laser and plasma metal cutting, welding, powder coating, assembly, warehousing and distribution.



We employ an international sales and marketing team that includes a full-time, job-site focused sales force and well as a network of independent sales representative agencies. Allen Concrete Equipment is sold worldwide in over 90 countries through a network of concrete equipment dealers.

We've never been more excited for the future of our company and the impact our products have on the buildings and infrastructures of an innovative and growing world.



# REASONS TO BUY ALLEN EQUIPMENT

## OUR PASSION IS QUALITY

Every member of Team Allen is focused on the total quality and reliability of every machine we make.

## OUR FOCUS IS INNOVATION

We are committed to constantly developing, innovating and improving our full line of equipment.

## FAMILY OWNED

The owners are directly involved in the everyday operation of the business focusing daily on Total Customer Satisfaction.

## CONTRACTOR FOCUSED

Our top priority for over 50 years has been to service and support the professional contractor.

## TWO-YEAR WARRANTY ON EVERY PRODUCT

We back up what we make and sell so you have complete confidence in our products.



Allen Concrete College (ACC) combines a classroom seminar and hands-on training in concrete placing and finishing techniques to produce high f-number floors. ACC is a great opportunity for Allen Dealers and contractors to learn how to increase the flatness and levelness of floors, the basics of concrete flooring mix design and the F-Number System.



To register for our next class, go to the online application form at [www.alleneng.com](http://www.alleneng.com) with complete information on the date and costs.

**ALLEN® PRODUCTS ARE COVERED UNDER ONE OR MORE OF THE FOLLOWING PATENT NUMBERS:** U.S. Patents: 465897S; 466,909; 5,816,739; 5,803,658; 5,890,833; 474,203; 5,988,939; 6,019,433; 5,934,823; 5,988,938; 5,967,696; 6,053,660; 6,089,787; 6,106,193; 6,048,130; 6,019,545; 6,089,786; 6,582,153; 6,857,815B2; 6,955,404; 7,108,449B1; 7,114,876B1; 7,316,523B1; 7,690,864; 8,360,680; 9,068,300; 9,068,301; With other Patents Pending.



## SITE PREP

<b>TAMPING RAMMER COMPACTORS</b>	6
<b>VIBRATORY PLATE COMPACTORS</b>	6
<b>REVERSIBLE PLATE COMPACTORS</b>	7

## PLACING

<b>CONCRETE &amp; PLASTER-MORTAR MIXERS</b>	8 - 9
<b>POWER BUGGIES</b>	
Rubber Tire Buggies	10 - 11
Track Buggies	12 - 13
<b>VIBRATORS</b>	
High-Frequency	14
Power Vibe Series	15
Electric Flex Shaft	15
Gasoline Back Pack	15
<b>TRUSS SCREEDS</b>	
Steel Truss Screeds	16 - 17
Aluminum Truss Screeds	17
Truss Screed Accessories	18 - 19
<b>MAGIC SCREED®</b>	20
<b>ROLLER TUBE FINISHERS</b>	
Engine Drive	21
Hydraulic Drive	21
<b>PERVIOUS HAND TOOLS</b>	21

## FINISHING

<b>HAND TOOLS</b>	22
<b>PANS &amp; BLADES</b>	23
<b>WALK-BEHIND TROWELS</b>	
Professional // PRO Series	24
Value Premium // VP Series	25
<b>RIDING TROWELS</b>	
Hydra Drive Extreme // HDX Series	26 - 27
High Performance // HP Series	28 - 29
Mechanical Super Pro // MSP Series	30 - 31
Mechanical Pro // MP Series	32 - 33
<b>POWER SPRAYERS</b>	34
<b>CONCRETE SAW</b>	34
<b>PAVING</b>	
<b>WORK BRIDGES</b>	
Manual Work Bridges	35
Powered Work Bridges	35
<b>BRIDGE DECK FINISHERS</b>	36 - 37
<b>TRIPLE ROLLER TUBE PAVERS</b>	38 - 39

## PROUD MEMBERS OF



## NEED MORE INFO?

VISIT OUR WEBSITE  
[WWW.ALLENENG.COM](http://WWW.ALLENENG.COM)

FOLLOW US ON

GIVE US A CALL  
 800.643.0095 (USA ONLY) / 870.236.7751



# TAMPING RAMMER COMPACTORS

With high stroke and maximum blows per minute, our high-performance tamping compactors produce impressive impact force and are perfect for cohesive soil compaction application.

DESCRIPTION	ATC130H	ATC170H
ENGINE	Honda GX100 (98 cc)	Honda GX100 (98 cc)
HORSEPOWER CLASS	3 hp (2.2 kW)	3 hp (2.2 kW)
FUEL CAPACITY	.9 gal (3.5 L)	.9 gal (3.5 L)
BLOWS PER MINUTE	650 - 700 bpm	650 - 700 bpm
SHOE SIZE	13.4 x 10.8 in (34 x 27.5 cm)	13.1 x 11.2 in (33.5 x 28.5 cm)
IMPACT FORCE	3,064 lbf (1,390 kgf)	3,527 lbf (1,600 kgf)
TRAVEL SPEED	32.8 - 42.7 ft/min (10 - 13 m/min)	32.8 - 42.7 ft/min (10 - 13 m/min)
COMPACTION DEPTH	24 in (61 cm)	24 in (61 cm)
COMPACTION AREA	2,799 ft <sup>2</sup> /hr (260 m <sup>2</sup> /hr)	2,799 ft <sup>2</sup> /hr (260 m <sup>2</sup> /hr)
WEIGHT	152 lb (69 kg)	175 lb (79 kg)
DIMENSIONS (L X W X H)	28.9 x 14.5 x 40.7 in (73.5 x 37 x 103.5 cm)	28.9 x 14.5 x 42.1 in (73.5 x 37 x 107 cm)



# VIBRATORY PLATE COMPACTORS

Our plate compactors are available with the size and performance needed for practically every compaction application from granular soil footings and sub-bases to asphalt paving repairs.



DESCRIPTION	APC140H	APC160H	APC210H
ENGINE	Honda GX120 (121 cc)	Honda GX160 (163cc)	Honda GX160 (163cc)
HORSEPOWER CLASS	3.5 hp (2.7 kW)	5.5 hp (4.1 kW)	5.5 hp (4.1 kW)
VIBRATION FREQUENCY	5,640 vpm (94 Hz)	5,640 vpm (94 Hz)	5,640 vpm (94 Hz)
PLATE SIZE	20 x 14.1 in (51 x 36 cm)	20 x 16.5 in (51 x 42 cm)	23.2 x 19.6 in (59 x 50 cm)
CENTRIFUGAL FORCE	2,359 lbf (1,070 kgf)	2,778 lbf (1,260 kgf)	3,461 lbf (1,570 kgf)
TRAVEL SPEED	82 ft/min (25 m/min)	82 ft/min (25 m/min)	82 ft/min (25 m/min)
COMPACTION DEPTH	7.9 in (20 cm)	11.8 in (30 cm)	13.7 in (35 cm)
COMPACTION AREA	5,920 - 6,458 ft <sup>2</sup> /hr (550 - 600 m <sup>2</sup> /hr)	6,243 - 6,997 ft <sup>2</sup> /hr (580 - 650 m <sup>2</sup> /hr)	6,673 - 7,534 ft <sup>2</sup> /hr (620 - 700 m <sup>2</sup> /hr)
WATER TANK CAPACITY	1.6 gal (6 L)	3.1 gal (12 L)	3.1 gal (12 L)
MAXIMUM GRADEABILITY	20°	20°	20°
WEIGHT	145 lb (66 kg)	163 lb (74 kg)	209 lb (95 kg)
DIMENSIONS (L X W X H)	38.2 x 14.1 x 41.3 in (97 x 36 x 105 cm)	38.2 x 16.5 x 41.3 in (97 x 42 x 105 cm)	43.3 x 19.6 x 37 in (110 x 50 x 94 cm)



# REVERSIBLE PLATE COMPACTORS

Great for tight places such as trench and excavation projects where room to turn around is limited, Allen Reversible Plate Compactors feature two exciter shafts that provide the forward/reverse direction control, and create a strong compaction force for deeper lifts or making fewer passes. Ideal for large foundations, retaining walls and compaction along pipe projects.



## ARP870D

DESCRIPTION	ARP340H	ARP700H	ARP870D
<b>ENGINE</b>	Honda GX160 (163 cc)	Honda GX270 (270 cc)	Hatz 1B40 Diesel
<b>HORSEPOWER CLASS</b>	5.5 hp (4.1 kW)	9 hp (6.7 kW)	9.3 hp (7.3 kW)
<b>VIBRATION FREQUENCY</b>	5,400 vpm (90 Hz)	4,200 vpm (70 Hz)	4,200 vpm (70 Hz)
<b>PLATE SIZE</b>	20 x 25.6 in (51 x 65 cm)	31.5 x 25 in (80 x 64 cm)	35.8 x 25.6 in (91 x 65 cm)
<b>CENTRIFUGAL FORCE</b>	6,744 lbf (3,059 kgf)	8,990 lbf (4,078 kgf)	11,241 lbf (5,099 kgf)
<b>TRAVEL SPEED</b>	72 ft/min (22 m/min)	72 ft/min (22 m/min)	85.3 ft/min (26 m/min)
<b>COMPACTION AREA</b>	6,997 ft <sup>2</sup> /hr (650 m <sup>2</sup> /hr)	8,525 ft <sup>2</sup> /hr (792 m <sup>2</sup> /hr)	9,817 ft <sup>2</sup> /hr (912 m <sup>2</sup> /hr)
<b>MAXIMUM GRADEABILITY</b>	25°	30°	30°
<b>WEIGHT</b>	342 lb (155 kg)	705 lb (320 kg)	870 lb (395 kg)
<b>DIMENSIONS (L X W X H)</b>	25.6 x 20 x 46.5 in (65 x 50 x 118.3 cm)	35.4 x 25 x 48.5 in (90 x 64 x 123.2 cm)	41.4 x 25.6 x 49.5 in (105 x 65 x 125.6 cm)



# CONCRETE & PLASTER-MORTAR MIXERS

Allen concrete and plaster-mortar mixers are designed and manufactured with the same quality and high standards as the rest of the Allen line-up, and are all highway towable. With your choice of steel or poly drums, you can count on Allen for all your mixing needs.

## ACM9H8




Oversized drum wheel makes discharge of material easier.



DESCRIPTION	ACM7H5	ACM7H8	ACM9H8	ACM9PH8	ACM12H13
ENGINE	Honda GX160 (163cc)	Honda GX240 (270 cc)	Honda GX240 (270 cc)	Honda GX240 (270 cc)	Honda GX390 (389 cc)
HORSEPOWER CLASS	5.5 hp (4.1 kW)	8 hp (6 kW)	8 hp (6 kW)	8 hp (6 kW)	13 hp (9.6 kW)
BATCH BAG CAPACITY	1 - 1.25	1 - 1.25	1 - 1.5	1 - 1.5	1.5 - 2
BATCH CAPACITY	7 cu ft	7 cu ft	9 cu ft	9 cu ft	12 cu ft
DRUM MATERIAL	Steel	Steel	Steel	Poly	Steel
MIXER TYPE	Paddle	Paddle	Paddle	Paddle	Paddle
DRIVE	V-Belt to Gears	V-Belt to Gears	V-Belt to Gears	V-Belt to Gears	V-Belt to Gears
WHEELS	12 x 4.8 High Speed	12 x 4.8 High Speed	13 x 6.5 High Speed	13 x 6.5 High Speed	13 x 6.5 High Speed
WEIGHT	790 lb (359 kg)	815 lb (370 kg)	868 lb (394 kg)	580 lb (263 kg)	895 lb (406 kg)
DIMENSIONS (L X W X H)	51 x 79 x 58 in (129 x 200 x 147 cm)	51 x 79 x 58 in (129 x 200 x 147 cm)	51 x 81 x 63 in (129 x 205 x 160 cm)	51 x 78 x 63 in (129 x 198 x 160 cm)	51 x 83 x 69 in (129 x 210 x 175 cm)



## AMM8PH8

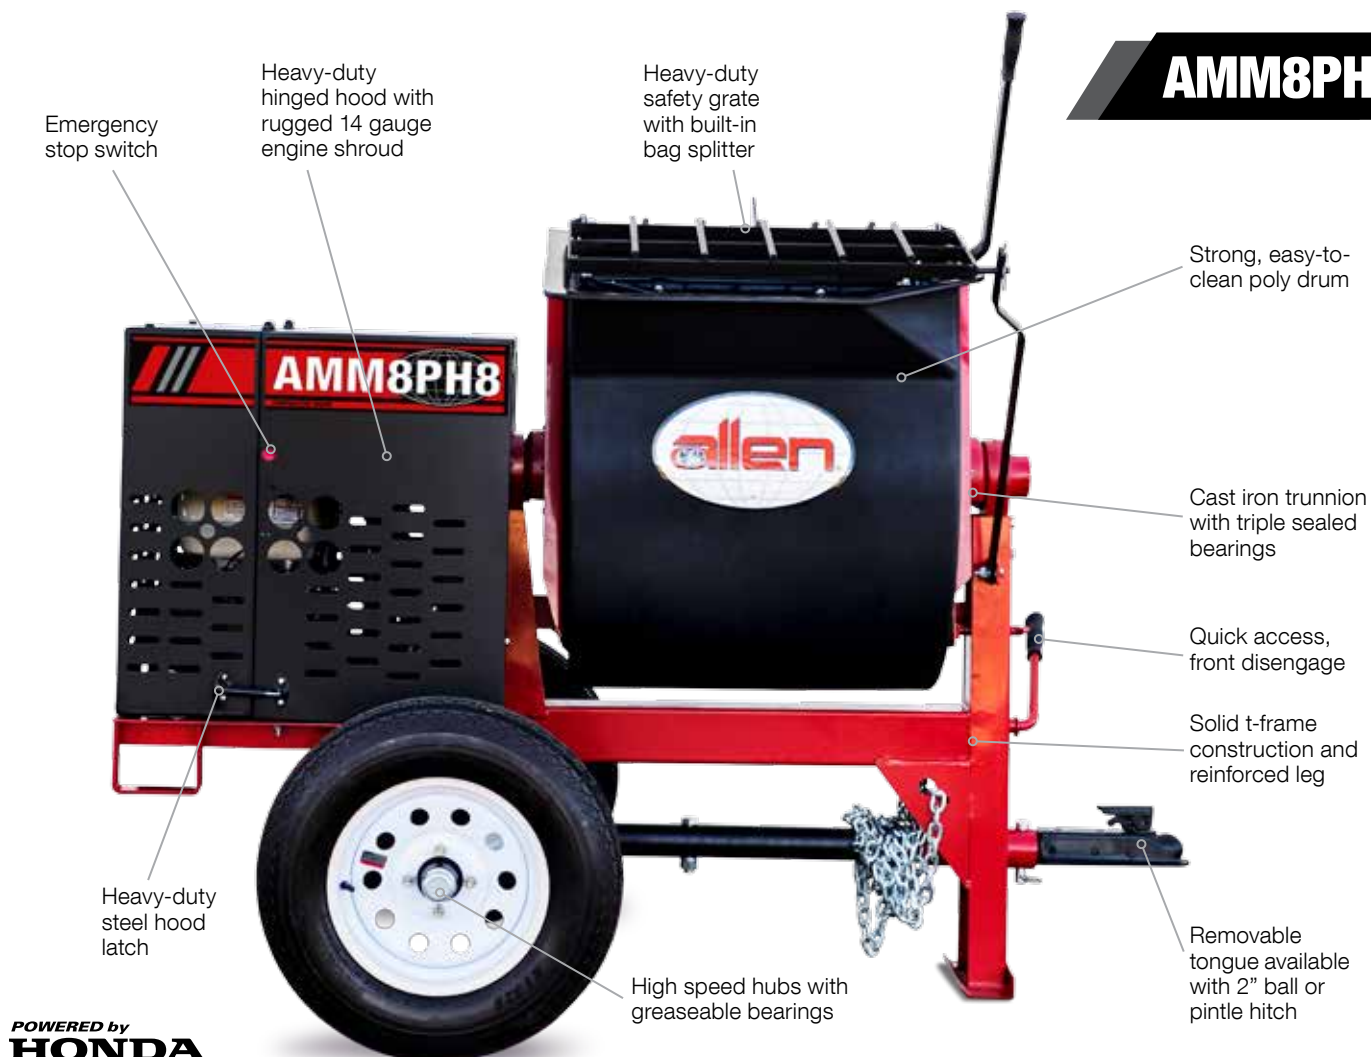

Our spiral mixer design offers a faster more consistent mix.



Our standard paddle design includes extra paddles on each end for a better mix.



Our durable cast iron pillow block and single piece central shaft increase the durability.



## AMM9H8

DESCRIPTION	AMM7H8	AMM8PH8	AMM9H8	AMMS9H8	AMM12H13
ENGINE	Honda GX240 (270 cc)	Honda GX240 (270 cc)	Honda GX240 (270 cc)	Honda GX240 (270 cc)	Honda GX390 (389 cc)
HORSEPOWER CLASS	8 hp (6 kW)	8 hp (6 kW)	8 hp (6 kW)	8 hp (6 kW)	13 hp (9.6 kW)
BATCH BAG CAPACITY	1 - 1.25	1.5 - 2	2.5 - 3	2.5 - 3	3.5 - 4
BATCH CAPACITY	7 cu ft	8 cu ft	9.5 cu ft	9.5 cu ft	12 cu ft
DRUM MATERIAL	Steel	Poly	Steel	Steel	Steel
MIXER TYPE	Paddle	Paddle	Paddle	Spiral	Paddle
DRIVE	V-Belt to Gears	V-Belt to Gears	V-Belt to Gears	V-Belt to Gears	Gearbox Belt Drive
WHEELS	12 x 4.8 High Speed	13 x 6.5 High Speed	13 x 6.5 High Speed	13 x 6.5 High Speed	13 x 6.5 High Speed
WEIGHT	747 lb (335 kg)	580 lb (263 kg)	816 lb (370 kg)	820 lb (371 kg)	1,128 lb (508 kg)
DIMENSIONS (L X W X H)	51 x 76 x 55 in (129 x 193 x 140 cm)	51 x 76 x 58 in (129 x 193 x 147 cm)	45 x 76 x 60 in (114 x 193 x 152 cm)	45 x 76 x 60 in (114 x 193 x 152 cm)	51 x 92 x 59 in (129 x 233 x 150 cm)

# ALLEN RUBBER TIRE POWER BUGGIES

The sixteen cubic foot AR16 and the twenty-one cubic foot AR21 have earned their rank as the standard by which all power buggies are judged. The standard high-strength, high-density polyethylene bucket is the industry's thickest and most durable. And standard features like heavy-duty hydraulic wheel motors, steel raceways for hydraulic hose protection and optional foam-filled tires ensure the AR16 and AR21 power buggies will operate for the duration under tough conditions. Our propane-powered buggy is perfect for indoor or around in-the-dry jobsites where air quality is an issue.

## AR16

Huge 16 cubic foot capacity, heavy-duty poly dump bucket

Hydraulic dump action

Foam filled tires

Solid 2" thick steel frame



AR16 P



**CARB**  
California Air Resources Board


Compliant with CARB and EPA Standards







POWERED by  
**HONDA**

DESCRIPTION	AR16	AR16 PROPANE 	AR21
ENGINE	Honda GX390 (389 cc)	Honda GX390 (389 cc)	Honda GX630 (688 cc)
HORSEPOWER CLASS	13 hp (9.6 kW)	13 hp (9.6 kW)	20 hp (14.9 kW)
STARTER	Recoil or Electric	Electric	Recoil or Electric
FUEL TYPE	Gasoline	Propane	Gasoline
FUEL CAPACITY	1.7 gal (6 L)	8 gal	2.1 gal (8 L)
TOP SPEED	7 mph (11.2 kph)	7 mph (11.2 kph)	5.9 mph (9.5 kph)
PAYLOAD	2500 lbs (1134 kg)	2500 lbs (1134 kg)	3200 lbs (1451 kg)
BUCKET CAPACITY	16 cu ft (0.45 cu m)	16 cu ft (0.45 cu m)	21 cu ft (0.59 cu m)
LIFT CYLINDER DIAMETER	2 in (51 mm)	2 in (51 mm)	2.5 in (63.5 mm)
DUMP / RETURN SPEED EMPTY	5 Seconds	5 Seconds	8 Seconds
WHEELBASE	40 in (102 cm)	40 in (102 cm)	40 in (102 cm)
WEIGHT	1300 lb (590 kg)	1370 lb (590 kg)	1405 lb (637 kg)
DIMENSIONS (L X W X H)	97 X 47 X 50 in (246 X 119 X 127 cm)	97 X 47 X 64 in (246 X 119 X 162 cm)	97 X 47 X 50 in (246 X 119 X 127 cm)

# ALLEN TRACK DRIVE POWER BUGGIES

The Allen Track Drive Power Buggies provide excellent traction on grades, inclines, and soft soils. The buggies providing excellent power, heavy load carrying capacity and up to sixteen cubic foot bucket volumes. The AT14S even has a 180-degree pivoting dump that will allow you to place your material exactly where you need it.

## AT16

Largest track buggy payload available at 2,500 lbs

Two work lights for greater work site visibility

Heavy-duty poly dump bucket for long life

Hydraulic dump action with 6" of ground clearance when fully dumped

Rubber tracks for extra load capacity and traction

POWERED BY  
**KOHLER**



Steel frame design for improved strength and performance.



Rear platform folds to allow for easier transport between jobsites or storage.





Two servo levers control the direction of the machine, and they automatically reset to stop in case of emergency.



Engine cover folds back to provide convenient access to the engine, gasoline tank, battery, and filters.



DESCRIPTION	AT14S	AT16
ENGINE	Honda GX630 (688 cc)	Kohler CV740 (725 cc)
HORSEPOWER CLASS	20 hp (14.9 kW)	25 hp (18.6 kW)
STARTER	Electric	Electric
FUEL TYPE	Gasoline	Gasoline
FUEL CAPACITY	3 gal (22.7 L)	6 gal (22.7 L)
TOP SPEED	WORK: 4 mph (6 kph) TRAVEL: 6 mph (10 kph)	WORK: 4 mph (6 kph) TRAVEL: 6 mph (10 kph)
PAYLOAD	1785 lb (810 kg)	2500 lb (1135 kg)
BUCKET CAPACITY	14 cu ft (0.39 cu m)	16 cu ft (0.45 cu m)
DUMP ANGLE	90°	90°
PIVOT ANGLE	180°	0°
WEIGHT	1540 lb (699 kg)	1475 lb (669 kg)
DIMENSIONS (L X W X H)	98.4" x 33.3" x 54" (250 x 81.3 x 137.1 cm)	97" X 47" X 64" (246 X 119 X 162 cm)


# HIGH FREQUENCY VIBRATORS

The AHFV22 high-frequency vibrator equips concrete professionals with a powerful, compact and efficient solution for better concrete consolidation. The vibrator is equipped with Intelli-Vibe which utilizes internal sensors to control vibration in response to concrete slump variations and rebar blockage. This ensures consistent high centrifugal force, stable speed and high amplitude for professionally consolidated concrete.

Internal sensors control vibration to respond to concrete slump variations and blockage in rebar.

49.2 feet of cable + 16.4 feet of hose give exceptional reach around the worksite. The overall design is also very service friendly.

Fits any regular single-phase wall socket with the appropriate voltage will suffice as power source. Just plug in and start work straight away.

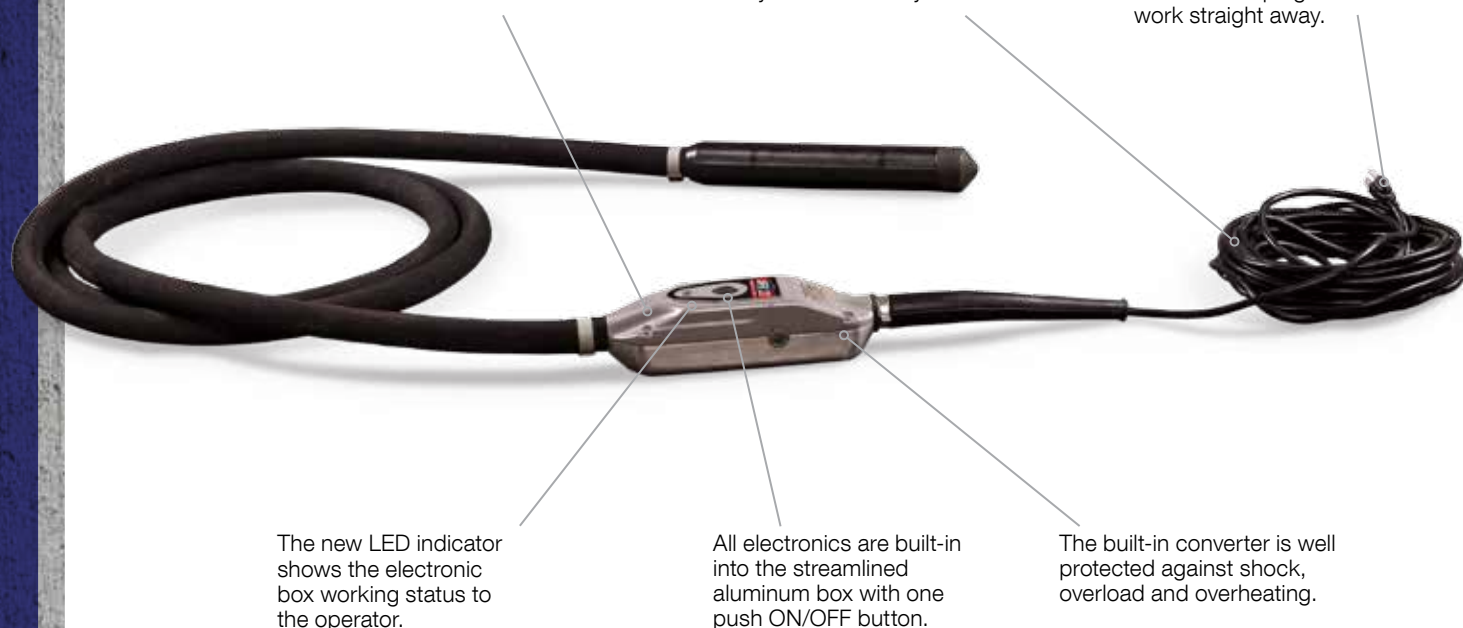

The new LED indicator shows the electronic box working status to the operator.

All electronics are built-in into the streamlined aluminum box with one push ON/OFF button.

The built-in converter is well protected against shock, overload and overheating.

DESCRIPTION	AHFV22
HEAD DIAMETER	2.2" (56 mm)
HEAD LENGTH	14.96" (380 mm)
HEAD WEIGHT	11.2 lb (5.1 kg)
HOSE LENGTH	16.4 ft (5 m)
CABLE LENGTH	49.2 ft (15 m)
FREQUENCY	12,000 vpm
CENTRIFUGAL FORCE	1034 lbs (469 kg)
PRIMARY VOLTAGE	115V-1-50/60Hz
AMPERAGE	115V - 12.8 A
AMPLITUDE	.13" (3.5 mm)
POWER	1.57 HP (1170 W)
VIBRATION VALUE	5.87 m/s <sup>2</sup>
NOISE LEVEL	79 dB(A)
DIMENSIONS OF THE CONVERTER	11.8" x 4.05" x 3.14" (30 x 10.3 x 8 cm)
TOTAL WEIGHT OF CONVERTER	35.05 lb (15.9 kg)





# POWER VIBE SERIES VIBRATORS

These concrete vibrators are the ultimate in hand-held gasoline powered vibrators. Both are lightweight, but powerful and provide excellent consolidation of concrete.



**POWER VIBE PRO**



**POWER VIBE**

POWERED by  
**HONDA**

DESCRIPTION	POWER VIBE	POWER VIBE PRO
ENGINE	Honda GX35 (35 cc)	Honda GX35 (35 cc)
HORSEPOWER CLASS	1.5 hp (1.1 kW)	1.5 hp (1.1 kW)
SHAFT LENGTHS	2 - 10 ft (.6 - 3 m)	1 ft (.6 m) Flexible shaft with rigid shaft extension
STEEL VIBRATORS HEAD SIZES	1 - 2 in (2.5 - 5.1 cm)	2 in (5.1 cm)
RUBBER VIBRATOR HEAD SIZES	2 in (5.1 cm)	2 in (5.1 cm)

# ELECTRIC FLEX-SHAFT VIBRATORS

These lightweight models feature high vibrations per minute in an easy-to-carry size, interchangeable head and shafts via our quick disconnect system, and a convenient shoulder strap for operator comfort.



Rubber coated heads vibrate concrete without damaging epoxy coated rebar.

DESCRIPTION	FSVE
POWER	115 Volt Grounded
MOTORS AVAILABLE	1.25 - 3.25 hp (.93 - 2.4 kW)
VIBRATIONS PER MINUTE	11,000 - 12,000
FLEXIBLE SHAFT LENGTHS	2 - 21 ft (.6 - 6.4 m)
VIBRATOR HEAD MATERIAL	Steel or Rubber



**FSVE**

# GASOLINE BACKPACK VIBRATORS

Our backpack vibrator allows you to go anywhere without worrying about the need for electricity. It features a "speed-up" transmission that allows the engine to run at low rpm's and still produce high vibrations per minute.



This unit makes changing heads and shafts easy via our quick disconnect system.





DESCRIPTION	BP50
ENGINE	Honda GXH50 (49cc)
HORSEPOWER CLASS	2.5 hp (1.9 kW)
VIBRATIONS PER MINUTE	11,000 - 12,000
FLEXIBLE SHAFT LENGTHS	2 - 21 ft (.6 - 6.4 m)
VIBRATOR HEAD MATERIAL	Steel or Rubber

POWERED by  
**HONDA**

# STEEL ENGINE DRIVEN TRUSS SCREED

The Allen® Razorback® Truss Screed is the contractor's preferred brand when high tolerance  $F_L$  Numbers are specified on concrete floors and pavements. For more than 40 years, Allen Truss Screeds have set the industry's standard for precision levelness, rigidity and durability.

## SE12

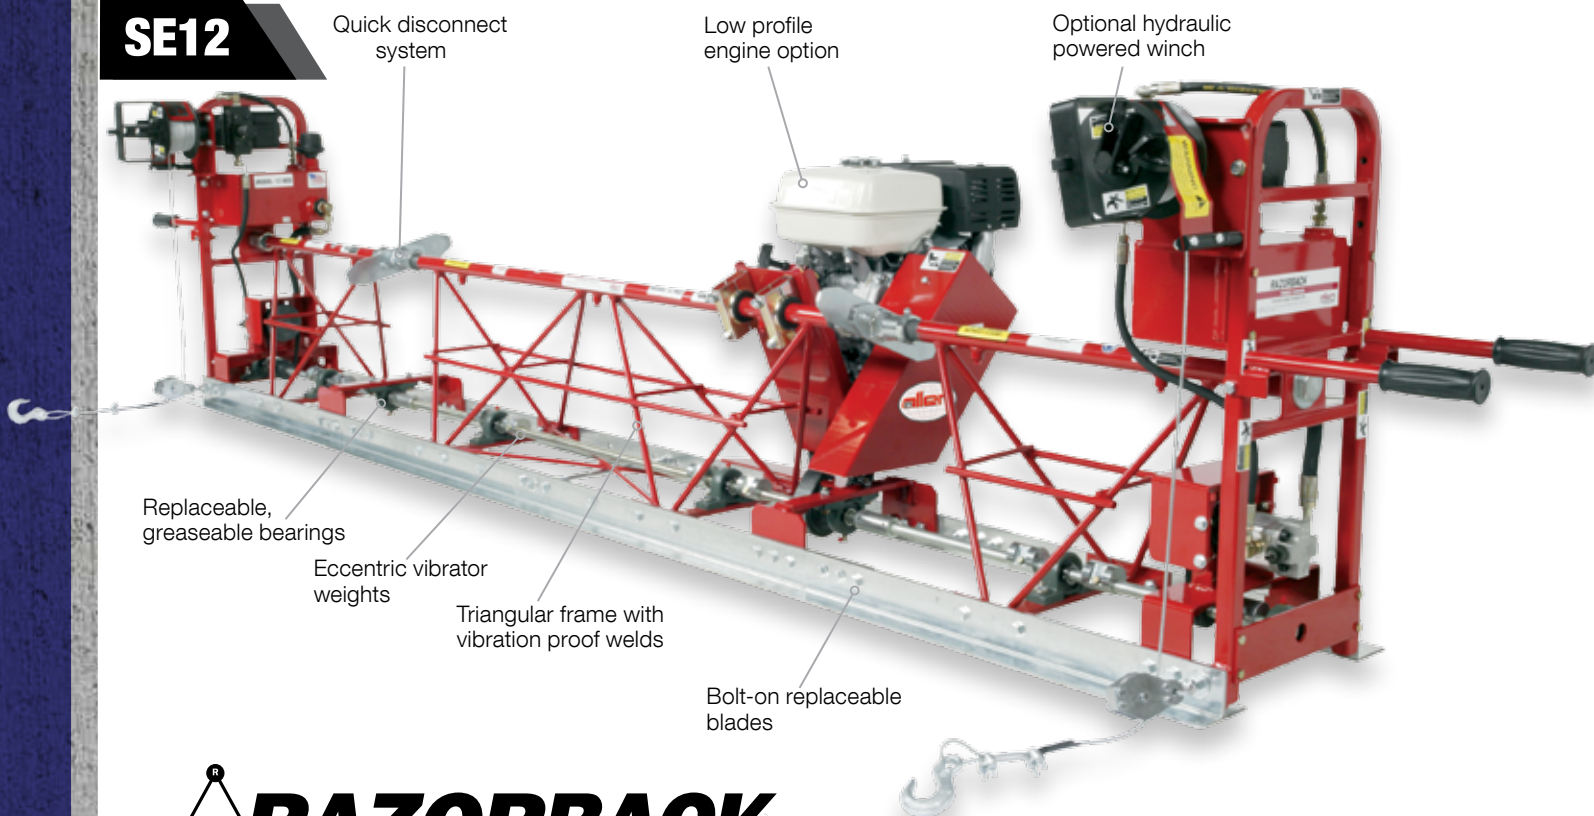

# RAZORBACK

### DESCRIPTION

SE12

#### FRAME CONSTRUCTION

Steel

#### VIBRATION SYSTEM

Eccentric Shaft

#### ENGINE (WIDTHS LESS THAN 50')

Honda GX270 - 9 hp (6.7 kW)

#### ENGINE (WIDTHS MORE THAN 50')

Honda GX340 - 11 hp (8.2 kW)

#### SECTION LENGTHS / WEIGHTS

2 FT (.61 M)	37 lb (17 kg)
2.5 FT (.76 M)	46 lb (20 kg)
5 FT (1.5 M)	90 lb (41 kg)
7.5 FT (2.3 M)	135 lb (61 kg)
10 FT (3.1 M)	180 lb (82 kg)

#### MAXIMUM WIDTH

65 ft (19.8 m)

#### LOWEST CONCRETE SLUMP

3 in (7.6 cm)

#### MAXIMUM CONSOLIDATION DEPTH

8 in (20.3 cm)

#### BLADES

10 Gauge  
Galvanized Steel






# STEEL AIR VIBRATION TRUSS SCREED

Our air-driven screeds feature precision engineered naval bronze piston vibrators that are rust resistant, non-sticking and free-starting.


DESCRIPTION	SA12
FRAME CONSTRUCTION	Steel
VIBRATION SYSTEM	Dual Air
SECTION LENGTHS / WEIGHTS	
2 FT (.61 M)	37 lb (17 kg)
2.5 FT (.76 M)	47 lb (21 kg)
5 FT (1.5 M)	93 lb (42 kg)
7.5 FT (2.3 M)	138 lb (63 kg)
10 FT (3.1 M)	186 lb (84 kg)
MAXIMUM WIDTH	65 ft (19.8 m)
LOWEST CONCRETE SLUMP	2 in (5.1 cm)
MAXIMUM CONSOLIDATION DEPTH	12 in (30.5 cm)
BLADES	10 Gauge Galvanized Steel



# ALUMINUM ENGINE DRIVEN TRUSS SCREED

A lighter weight, extremely portable version of our legendary steel screeds, the engine-driven aluminum truss screed is perfect for the pickup truck portability to job-sites.

DESCRIPTION	AE12
FRAME CONSTRUCTION	Aluminum
VIBRATION SYSTEM	Eccentric Shaft
ENGINE (WIDTHS LESS THAN 50')	Honda GX270 - 9 hp (6.7 kW)
ENGINE (WIDTHS MORE THAN 50')	Honda GX340 - 11 hp (8.2 kW)
SECTION LENGTHS / WEIGHTS	
2 FT (.61 M)	24 lb (11 kg)
2.5 FT (.76 M)	34 lb (15 kg)
5 FT (1.5 M)	60 lb (27 kg)
7.5 FT (2.3 M)	90 lb (41 kg)
MAXIMUM WIDTH	50 ft (15.2 m)
LOWEST CONCRETE SLUMP	4 in (10.2 cm)
MAXIMUM CONSOLIDATION DEPTH	6 in (15.2 cm)
BLADES	12 Gauge Galvanized Steel

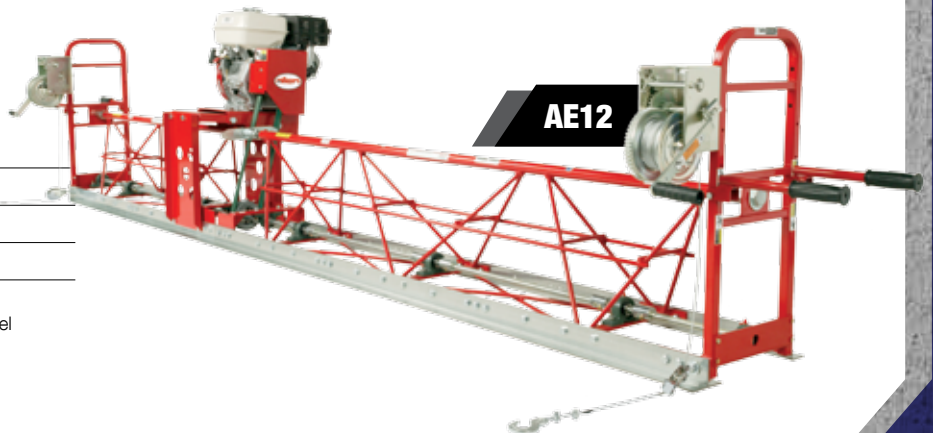

POWERED by  
**HONDA**




# TRUSS SCREED ACCESSORIES

We have many special application truss screed accessories designed to make your Allen Razorback® Truss Screed a highly useful and versatile screeding tool. From infrastructure to agriculture applications, we have designed and tested hundreds of customized Allen Truss Screed Accessories over our 40 plus years of truss screed manufacturing experience.



## ADJUSTABLE END BRACKETS

Rides on forms or wall brackets and can be adjusted both horizontally and vertically. Available with and without rollers. (shown with rollers)

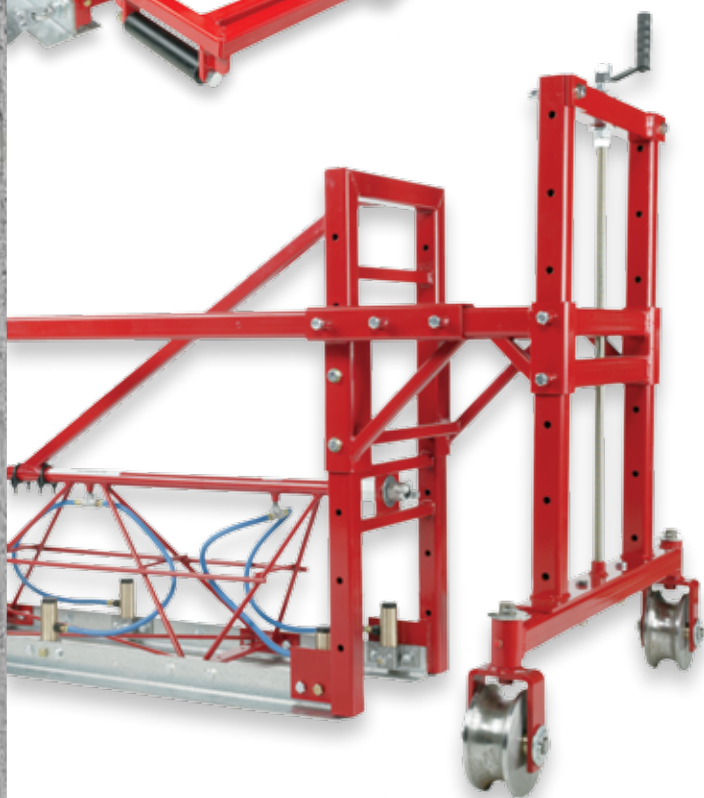

## BRIDGE DECK HANDLE


Used to straddle obstacles associated with slab on grade, bridge and highway construction. Adjustable in both horizontal and vertical direction.



## STRADDLE BRACKET

Fits between sections of screed when it is necessary to straddle an object in the path of the screed pour. (Air Vibration Screeds Only)





# RAZORBACK

## SCREED CART

Gets you around the job site quickly and easily.



## CROWN/ INVERT BRACKET

Attaches in the center between two or more sections of screeds.

For use when crown or invert exceeds one-quarter inch per one foot.



## PIVOT BRACKET

This unique accessory enables a contractor to use a truss screed on a round tank bottom, such as sewage treatment plant tanks. The pivot bracket can cut down on labor and finishing costs.




# MAGIC SCREED®

The Magic Screed is a precision engineered, lightweight wet screed for single operator strike-off of concrete. Fast and easy to use, this high-frequency screed provides uniform distribution over the entire blade length, enhancing structural integrity of the concrete through consolidation.

## HD7070



POWERED by  
**HONDA**



The unique, patented blade simultaneously cuts and smooths concrete.



Handles can be adjusted for height, twisted to the inside or outside and have the angle adjusted for maximum ergonomic support.

DESCRIPTION	HD6060	HD7070
ENGINE	Honda GX35 (35cc)	Honda GX35 (35cc)
HORSEPOWER CLASS	1.5 hp (1.1 kW)	1.5 hp (1.1 kW)
HANDLES	Fixed	Adjustable
WEIGHT	30 lb (13.5 kg)	30 lb (13.5 kg)

BLADE WIDTHS	BLADE WEIGHTS
4 ft (1.22 m)	6 lb (3 kg)
6 ft (1.83 m)	10 lb (4 kg)
8 ft (2.44 m)	13 lb (6 kg)
10 ft (3.05 m)	16 lb (7 kg)
12 ft (3.66 m)	20 lb (9 kg)
14 ft (4.27 m)	23 lb (11 kg)
16 ft (4.88 m)	27 lb (12 kg)



# ENGINE DRIVEN ROLLER TUBE FINISHER

This portable and powerful solution strikes off concrete fast and accurately.



DESCRIPTION	RTF EPU
ENGINE	Honda GXH50 (49 cc)
HORSEPOWER CLASS	2.5 hp (1.9 kW)
TUBE DIAMETER	4.5 in (10.1 cm)
TUBE LENGTHS AVAILABLE	6 - 24 ft (1.83 - 7.32 m)

POWERED by  
**HONDA**

## FEATURES

- Optional counter weight kit available
- High-Speed 300 RPM Gear Box

- Will drive all 4.5" Tubes up to 24'
- Variable speed control handle
- Handles swivel for ease of use and easy storage



# HYDRAULIC ROLLER TUBE FINISHER

For applications where more power and a larger tube is needed. This unit is great for slope pours and pervious concrete jobs.

DESCRIPTION	RTF HPU
ENGINE	Kohler CH440 (429 cc)
HORSEPOWER CLASS	14 hp (10.4 kW)
TUBE DIAMETER	6.5 in (16.5 cm)
TUBE LENGTHS AVAILABLE	6 - 26 ft (1.83 - 7.93 m)



## FEATURES

- Webster Control Valve
- 4.5 GPM hydraulic system at 2500 PSI
- 50-foot Quick Disconnect Hose is standard
- Removable frame for maintenance
- Hydraulic cooling system with 12-volt fan

POWERED BY  
**KOHLER**



# PERVIOUS CONCRETE TOOLS

Use these tools when consolidating and jointing pervious concrete. These unique hand tools are a part of Allen's Total Tube Finishing System. Handles not included.



# HAND TOOLS

Checked to exact flatness tolerances, our extruded magnesium Allen Hand Tools are specifically designed to improve floor or pavement levelness. Each tool comes standard with three 6' (1.8 m) snap-together aluminum handles, the equalizer, outriggers and turn buckle.

## BUMP CUTTER

Cuts down bumps and fills low areas after concrete slab has been floated.




## CHECK ROD

Reduces bumps and fills low areas while the concrete is still plastic.



## CHANNEL FLOAT

Use in lieu of traditional bull float for flatter floors and pavements.

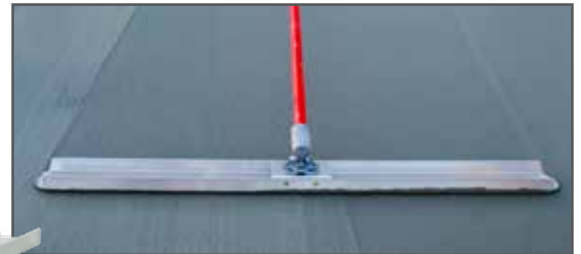

Our hand tools are available with either the Rock-It (left) or Equalizer Pitch (right) adjusting head for precise, even control.

DESCRIPTION	TOOLS WIDTHS	CHANNEL / BEAM DIMENSIONS
HTCF CHANNEL FLOAT	5 - 12 ft (1.5 - 3.7 m)	6 in (15.2 cm)
HTCR CHECK ROD	8 - 16 ft (2.4 - 4.9 m)	2 x 4 in (5.1 x 10.2 cm)
HTBC BUMP CUTTER	8 - 16 ft (2.4 - 4.9 m)	2 x 4 in (5.1 x 10.2 cm)



# STEEL FLOAT PANS

Allen Engineering pioneered the use of floating discs (or pans) on riding trowels in 1989 and Allen® Pans remain today the finisher's choice when high  $F_f$  Numbers are specified on a concrete floor. Allen's flat pan tolerances cut bumps and fill low spots in the concrete floor. Insist on Allen® Steel Pans for your Allen Riders and Walk-Behinds. Made to the same exacting tolerances as the trowels themselves, nothing finishes better.



Safety Catch Pan

Clip-On Pan

## TWO TYPES OF PANS


Allen offers both Flat (0" to 1/8" dish) and Mild-Dished (1/4" to 3/8" dish) steel pans. This gives contractors even more pan choices from Allen.



MADE IN  
THE USA

# TROWEL BLADES

Allen Engineering offers a complete line of finish blades, combination blades and clip-on float shoes for your walk-behind or ride-on power trowels. We use high quality steel or composite plastic with six high strength rivets to maximize blade life. For the flattest floors, trust only Allen Finishing Blades. And, Allen Blades fit most other brands of walkers and riders.

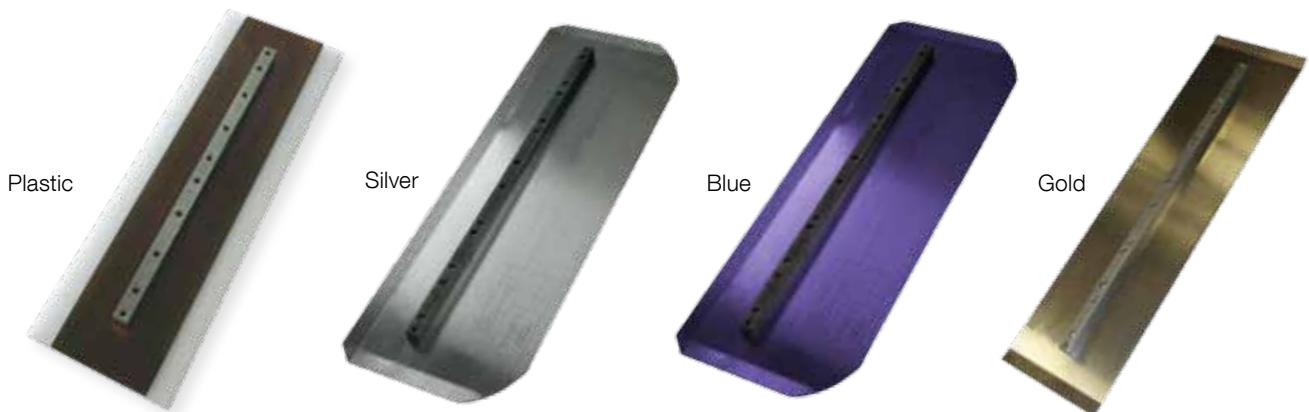

Plastic

Silver

Blue

Gold

# PRO WALK-BEHIND TROWELS

Allen Pro-Series Walkers feature precision engineered gearboxes for long, trouble-free life. We use cast iron spiders, pressure plates and lift levers for long wear and continuous service, and we precision machine our trowel arms and spiders to such close tolerances that our trowels do not require bushings.



POWERED by  
**HONDA**



Fine pitch handles use a twist action to control blade pitch from flat to 28° and anything in between.




Positive pitch handles use a ratcheting action to provide easy adjustment with the push or pull of a lever.



## UNIQUE PATENTED EDGING WALKER

This unique 36" rotating edge ring can only be found on PRO436 E. It is perfect for troweling along the edges of walls or around protruding pipe and conduit.

DESCRIPTION	PRO436	PRO436 E	PRO436 P 	PRO446	PRO446 TC
ENGINE	Honda GX160 (163 cc)	Honda GX270 (270 cc)	Kohler CH395 (277 cc)	Honda GX270 (270 cc)	Honda GX390 (389 cc)
HORSE POWER CLASS	5.5 hp (4.1 kW) or 9 hp (6.7 kW)	9 hp (6.7 kW)	9.5 hp (7.1 kW)	9 hp (6.7 kW)	13 hp (9.7 kW)
ROTOR DIAMETER	36 in (92 cm) 4-blades	36 in (92 cm) 4-blades	36 in (92 cm) 4-blades	46 in (117 cm) 4-blades	46 in (117 cm) 4-Blades
MAXIMUM ROTOR SPEED	120 rpm	120 rpm	120 rpm	120 rpm	180 rpm
TROWEL ARMS & SPIDER	Standard Duty	Standard Duty	Standard Duty	Standard Duty	Super Duty
WEIGHT	186 lb (89 kg) or 222 lb (101 kg)	198 lb (89 kg)	290 lb (131 kg)	250 lb (113 kg)	315 lb (142 kg)
DIMENSIONS (L X W X H)	72 x 38 x 36 in (177.8 x 96.5 x 91.5 cm)	84 x 36 x 38 in (213.4 x 91.5 x 96.5 cm)	72 x 38 x 36 in (177.8 x 96.5 x 91.5 cm)	78 x 48 x 39 in (198.1 x 121.9 x 99 cm)	78 x 48 x 39 in (198.1 x 121.9 x 99 cm)



# VP WALK BEHIND TROWELS

Our Value Premium (VP) walk-behind trowels are our slightly lighter weight but feature-rich and professional quality walkers. Available with either fine-pitch or positive pitch blade controls and a 24-inch edger model, these are the dependable workhorses for your concrete finishing needs.



DESCRIPTION	VP424	VP436	VP446
<b>ENGINE</b>	Honda GX120 (118 cc)	Honda GX160 (163 cc)	Honda GX270 (270 cc)
<b>HORSE POWER CLASS</b>	4 hp (3 kW)	5.5 hp (4.1 kW) or 9 hp (6.7 kW)	9 hp (6.7 kW)
<b>ROTOR DIAMETER</b>	24 in (61 cm) 4-blades	36 in (92 cm) 4-blades	46 in (117 cm) 4-blades
<b>MAXIMUM ROTOR SPEED</b>	135 rpm	150 rpm	150 rpm
<b>TROWEL ARMS &amp; SPIDER</b>	Standard Duty	Standard Duty	Standard Duty
<b>WEIGHT</b>	122 lb (55 kg)	172 lb (78 kg) or 184 lb (87.9 kg)	210 lb (95 kg)
<b>DIMENSIONS (L X W X H)</b>	65 x 24 x 43 in (165.1 x 61.0 x 109.2 cm)	75 x 36 x 43 in (190.5 x 91.5 x 109.2 mm)	82 x 46 x 43 in (2,083 x 1,168 x 1,092 mm)

# HYDRA DRIVE EXTREME RIDERS

Designed to satisfy the most demanding concrete contractors, the Allen HDX Series of hydraulic-powered riding trowels are packed with the punch of high-horsepower diesel engines and are not only the most powerful riders in their class, they're also one of the most dependable. With ideal weight to horsepower ratios and hydraulic components, these riders ensure a peak performance every time.

## HDX780

Light switch, key switch and hour meter all in one location

Engine throttle built-in the seat frame

Hydraulic joystick power steering

Detachable front access panels

Super-duty cast iron spiders with super-duty steel trowel arms

HYDRA-DRIVE EXTREME 780  
CONTRACTOR TROWEL

Six adjustable lights

Hydraulic fluid reservoir inside frame

POWERED BY  
**Kubota**



The HDX780 uses a 99 hp turbo-charged Tier III diesel engine to provide all the power needed for our largest riding trowel.



The HDX780 comes with leak proof hydraulic hoses, and independent hydraulic pitch control.



# HDX760

## NEW MODEL!



Digital display / computer

Button panel controls dual pitch, throttle, lights and cruise control

Two point lifting

Hydraulic joystick power steering

Air filter to comply with EPA Tier IV regulations

Super-duty cast iron spiders with six super-duty steel trowel arms



Six adjustable LED lights

POWERED BY

**HATZ**  
DIESEL



**COMING SOON!**

The HDX610, an eight foot hydraulic T4F riding trowel will release in 2017.



The powerful 74 hp Hatz Tier IV Final engine will provide all the power you will need for any job size.



The digital display will allow you to see rpm, temperature, hours, and more in one convenient place.

DESCRIPTION	HDX760	HDX780
ENGINE	Hatz 4H50TIC (T4F)	KubotaV3800DI-T-E3B (T3)
HORSEPOWER CLASS	74 hp (55 kW)	99 hp (73.8 kW)
FUEL TYPE	Diesel	Diesel
PANNING PATH WIDTH	117.6 in (298.7 cm)	139 in (353 cm)
ROTORS (DIAMETER)	57.6 in (146.3 cm) 6-Bladed Spider	60 in (152.4 cm) 6-Bladed Spider
MAXIMUM ROTOR SPEED	145 rpm	135 rpm
STEERING CONTROL SYSTEM	Power	Power
FUEL CAPACITY	11 gal (41.6 L)	20 gal (75.7 L)
RETARDANT CAPACITY	6 gal (23 L)	6 gal (23 L)
WEIGHT	2,687 lb (1,219 kg)	3,044 lb (1,386 kg)
DIMENSIONS (L X W X H)	122.7 x 62.7 x 62 in (311.6 x 159.3 x 157.5 cm)	108.5 x 50.5 x 56 in (275.6 x 128.3 x 142.2 cm)

# HIGH PERFORMANCE RIDERS

The High Performance series of riding trowels, feature twin gasoline engines. These machines are workhorses built for concrete professionals that delivers maximum horse power with electronic fuel injection. Utilizing torque converter clutches, they provide excellent low speed torque for low speed float panning and superior high rotor speed for finishing concrete.

## HP205

**NEW MODEL!**

Adjustable seat

Hydraulic steering

Twin EFI engines

Six-bladed spider with super heavy-duty (SHD) gearbox

Detachable front access panels



Six LED lights


Raised Operator Platform

Powered retardant spray system

POWERED BY  
**KOHLER**



We combined the convenience of hydraulic steering with the power of twin gasoline engines.

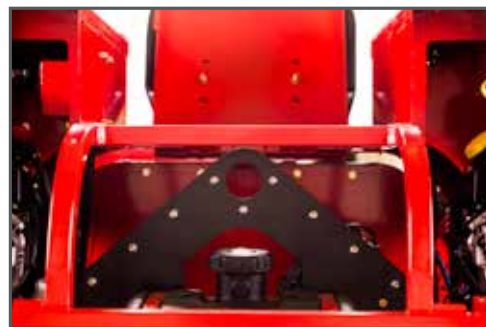

A single point lifting hook can be found under the seat.



# HP105



The torque converter clutch ensures maximum control over machine speed.



Dual 6 gallon fuel tanks for extended run times.

DESCRIPTION	HP105	HP205
ENGINE	2x - Kohler ECH749 (747 cc) (EFI)	2x - Kohler ECH980 (999cc) (EFI)
HORSEPOWER CLASS	26.5 hp (19.8 kW) per engine	37 hp (27.6 kW) per engine
FUEL TYPE	Air-Cooled Gasoline	Air-Cooled Gasoline
PANNING PATH WIDTH	95 in (241 cm)	117.6 in (298.7 cm)
ROTORS (DIAMETER)	46 in (117 cm) 5-Bladed Spider	57.6 in (146.3 cm) 6-Bladed Spider
MAXIMUM ROTOR SPEED	180 rpm	180 rpm
STEERING CONTROL SYSTEM	Manual	Power
FUEL CAPACITY	12 gal (46 L)	12 gal (46 L)
RETARDANT CAPACITY	6 gal (23 L)	6 gal (23 L)
WEIGHT	1,180 lb (545 kg)	2,169 lb (983 kg)
DIMENSIONS (L X W X H)	101.5 x 50.5 x 44.5 in (254 x 128 x 113 cm)	123.7 x 63.2 x 62.1 (314.2 x 160.5 x 157.7 cm)



# MECHANICAL SUPER PRO RIDERS


Featuring your choice of joystick power or manual lever steering and the power of gasoline engines, the Mechanical-Drive Super Pro (MSP) Series is our most popular series of riders with larger contractors. These riding trowels are powerful and responsive due their weight-to-horsepower ratio.

## MSP455





# MSP445

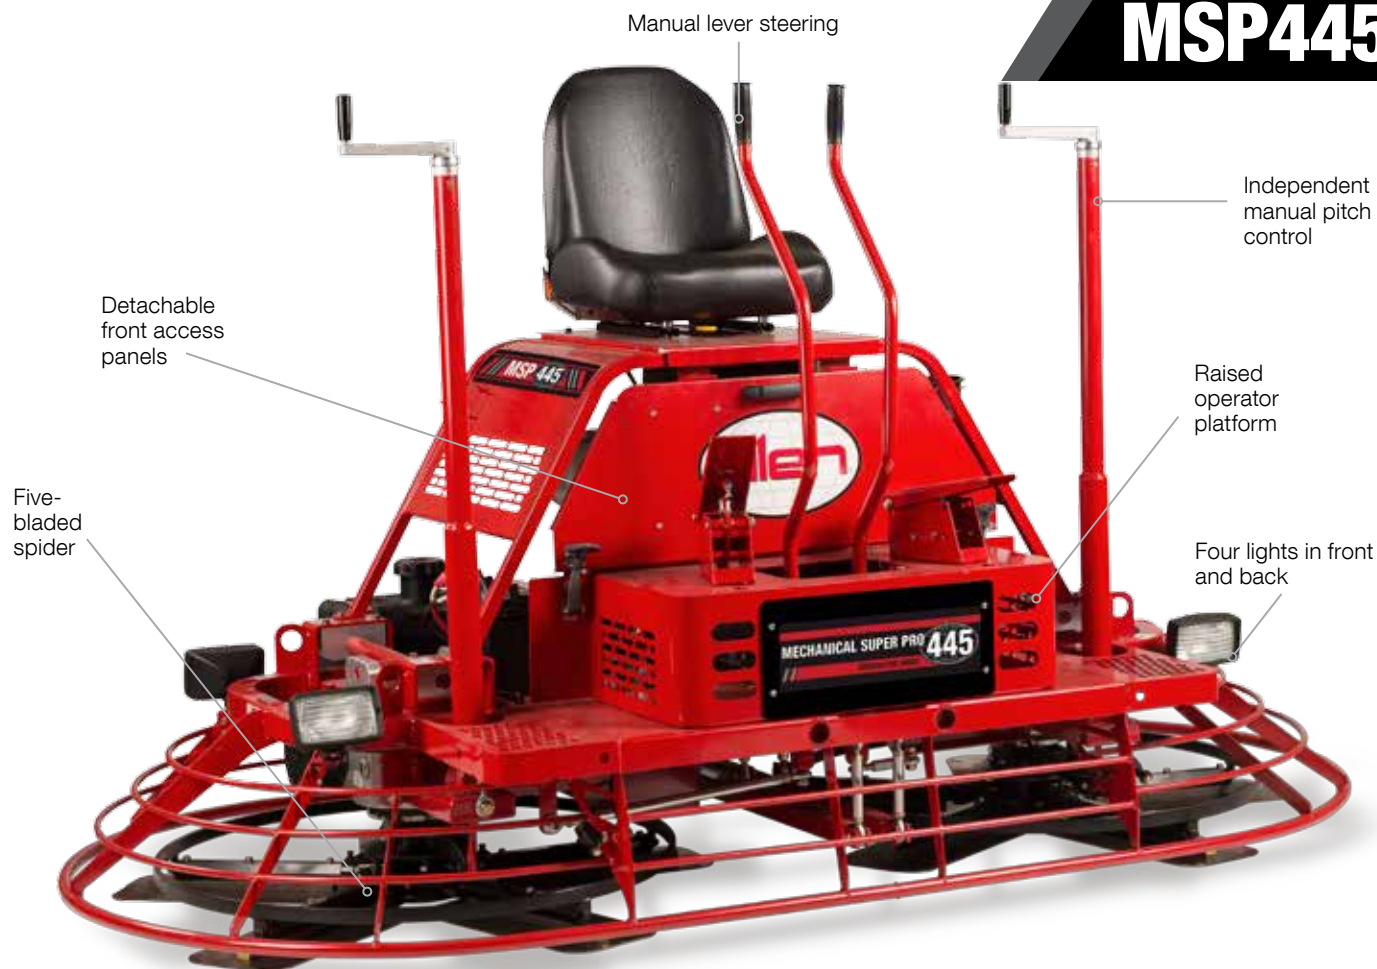


Our super heavy-duty gearboxes have a 20:1 gear box ratio that provides superior rotor speeds.



The torque converter clutch ensures maximum control over machine speed.



Optional dolly jack wheels get you around the job site with ease.



Optional lifting bridle for easy on-the-job mobility.

DESCRIPTION	MSP445	MSP455
ENGINE	Kohler CH1000 (999cc)	Kohler CH1000 (999cc)
HORSEPOWER CLASS	37 hp (27.6 kW)	37 hp (27.6 kW)
FUEL TYPE	Air-Cooled Gasoline	Air-Cooled Gasoline
PANNING PATH WIDTH	97.5 in (248 cm)	97.5 in (248 cm)
ROTORS (DIAMETER)	46 in (117 cm) 5-Bladed Spider	46 in (117 cm) 5-Bladed Spider
MAXIMUM ROTOR SPEED	165 rpm	165 rpm
STEERING CONTROL SYSTEM	Manual	Power
FUEL CAPACITY	6 gal (23 L)	6 gal (23 L)
RETARDANT CAPACITY	6 gal (23 L)	6 gal (23 L)
WEIGHT	1,052 lb (477 kg)	1,175 lb (533 kg)
DIMENSIONS (L X W X H)	101.5 x 50.5 x 59.5 in (254 x 128 x 151 cm)	101.5 x 50.5 x 59.5 in (254 x 128 x 151 cm)

# MECHANICAL PRO RIDERS

The Mechanical-Drive Pro (MP) Series represents our entry-level riders complete with features found on our larger riders and the renowned durability of all Allen equipment. These riders—in three convenient sizes—are equipped with high-horsepower gasoline engines, heavy-duty drivetrains and packed in easy-to-service frames.

## MP315



POWERED by  
**HONDA**



# MP235

The patented MP235 Edger, with its unique rotating guard rings allows you to run along the edges of walls, around columns and pipes—for a close, clean finish every time. This exclusive Allen Rider allows you to edge within 5/16" of the edge of a wall, eliminating the need to hand finish those areas. This patented trowel features similar specifications as our MP215, along with a stretched frame for improved productivity and operator comfort.



Easy-to-access switches and 12 volt charging plug for phones or electronic devices.




Proven dependability and reliability from our standard-duty gearboxes.

DESCRIPTION	MP215	MP235 EDGER	MP315
ENGINE	Honda GX690 (688 cc)	Honda GX690 (688 cc)	Honda GX690 (688 cc)
HORSEPOWER CLASS	22.1 hp (16.5 kW)	22.1 hp (16.5 kW)	22.1 hp (16.5 kW)
FUEL TYPE	Air-Cooled Gasoline	Air-Cooled Gasoline	Air-Cooled Gasoline
PANNING PATH WIDTH	74 in (188 cm)	85 in (216 cm)	95 in (241 cm)
ROTORS (DIAMETER)	36 in (91.4 cm) 4-Bladed Spider	36 in (91.4 cm) 4-Bladed Spider	46 in (170 cm) 5-Bladed Spider
MAXIMUM ROTOR SPEED	145 rpm	145 rpm	145 rpm
STEERING CONTROL SYSTEM	Manual	Manual	Manual
FUEL CAPACITY	6 gal (23 L)	6 gal (23 L)	6 gal (23 L)
RETARDANT CAPACITY	6 gal (23 L)	6 gal (23 L)	6 gal (23 L)
WEIGHT	735 lb (333 kg)	783 lb (355 kg)	830 lb (376 kg)
DIMENSIONS (L X W X H)	78 x 41 x 53 in (198 x 104 x 135 cm)	86 x 39 x 53 in (218 x 99 x 135 cm)	98 x 50 x 53 in (249 x 127 x 135 cm)

# POWER SPRAYERS

Our powerful, reliable and durable power sprayers are the preferred tool for applying release agents, water-based sealants and curing compounds on concrete construction sites. The continuous recirculating system ensures your material is always well mixed and ready to spray. Available in barrel, cart or tow models.

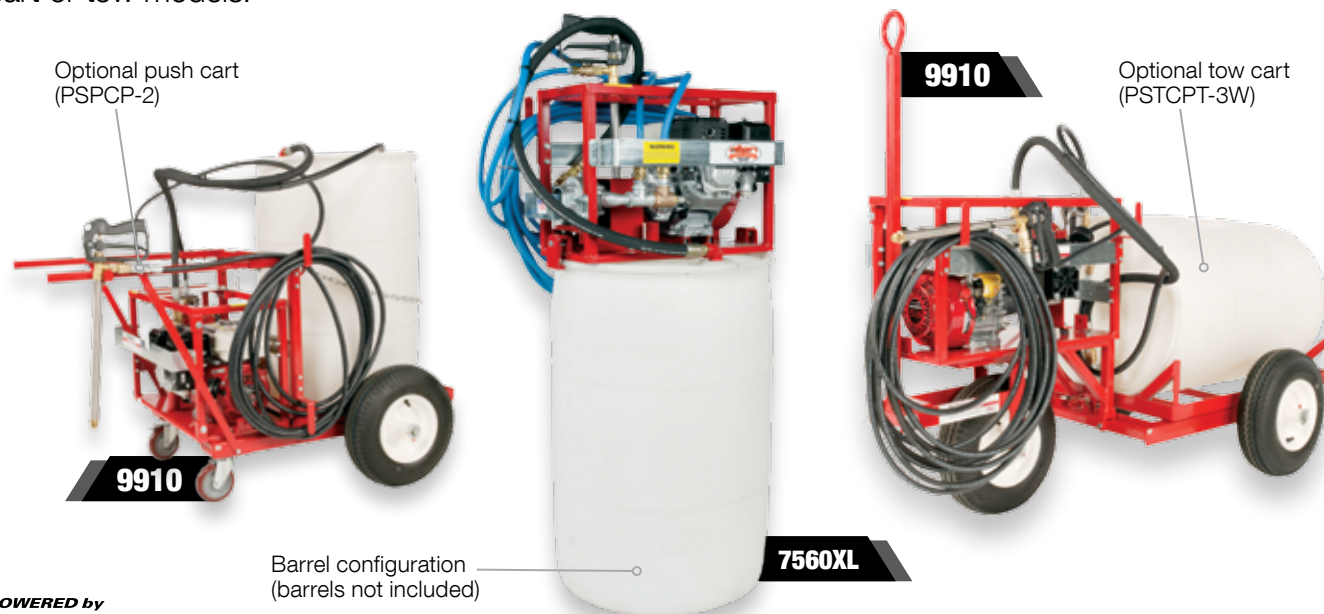

POWERED by  
**HONDA**

DESCRIPTION	9910	7560XL
ENGINE	Honda GX160 (163 cc)	Honda GX120 (118 cc)
HORSEPOWER CLASS	5.5 hp (4.1 kW)	4 hp (3 kW)
MAXIMUM FLOW RATE	9.5 gpm	7.5 gpm
PUMP TYPE	Diaphragm	Roller Ball
HOSE TYPE	Hydraulic	3/8" Lock-On
HOSE LENGTH	50 ft (15.24 m)	50 ft (15.24 m)
SPRAYER TIP	Fan Tip 4020	Fan Tip 4020
MAXIMUM SOLID CONTENT	35%	30%
WEIGHT	134 lb (61 kg)	106 lb (48 kg)



# CONCRETE SAW

A compact saw with powerful attributes, our concrete saw features a high-horsepower engine, deep cutting abilities and is highly maneuverable.

DESCRIPTION	APS20H
ENGINE	Honda GX390 (389 cc)
HORSEPOWER CLASS	13 hp (9.7 kW)
MAXIMUM CUTTING DEPTH	7 in (17.5 cm)
BLADE SIZE	12 - 20 in (35 - 50 cm)
WEIGHT	348 lb (158 kg)
DIMENSIONS	62 x 22 x 43 in (155.7 x 55.8 x 108 cm)





# WORK BRIDGES

Allen Work Bridges can be customized for every application. These work bridges are ideal for joint work, applying curing compounds, bull-floating, applying textures or whenever bridging is required. The Allen Work Bridge is an economical workhorse on any job site. Both powered and non-powered are available in several sizes.

## MANUAL WORK BRIDGES



WB1224 with wheels and attaching forks.



WB1824 with bridge deck handles.



WB1824 with bridge deck handles.

DESCRIPTION	WB1224	WB1824	WB2434
<b>FRAME DIMENSIONS (D X W)</b>	12 x 24 in (30.5 x 61 cm)	18 x 24 in (45 x 61 cm)	24 x 34 in (61 x 86.3)
<b>MAX MACHINE LENGTH</b>	65 ft (20 m)	105 ft (32 m)	120 ft (36.5 m)
<b>AVAILABLE SECTIONS</b>	2 ft (0.61 m)	3 ft (.91 m)	3 ft (.91 m)
	5 ft (1.52 m)	6 ft (1.83 m)	6 ft (1.83 m)
	7 ft (2.28 m)	12 ft (3.66 m)	12 ft (3.66 m)
<b>TELESCOPIC SECTIONS</b>	N/A	15 - 25 ft. (4.57 - 7.62 m)	15 - 25 ft. (4.57 - 7.62 m)

## POWERED WORK BRIDGES



DESCRIPTION	PWB1824	PWB2434
<b>ENGINE</b>	Honda GX270 (270 cc)	Honda GX270 (270 cc)
<b>HORSEPOWER CLASS</b>	9 hp (6.7 kW)	9 hp (6.7 kW)
<b>FUEL TYPE</b>	Gasoline	Gasoline
<b>FRAME DIMENSIONS (D X W)</b>	18 x 24 in (45 x 61 cm)	24 x 34 in (61 x 86.3)
<b>MAX MACHINE LENGTH</b>	105 ft (32 m)	120 ft (36.5 m)
<b>AVAILABLE SECTIONS</b>	3 ft (.91 m)	3 ft (.91 m)
	6 ft (1.83 m)	6 ft (1.83 m)
	12 ft (3.66 m)	12 ft (3.66 m)
<b>TELESCOPIC SECTIONS</b>	15 - 25 ft. (4.57 - 7.62 m)	15 - 25 ft. (4.57 - 7.62 m)



# BRIDGE DECK FINISHERS

Our bridge deck finishers are becoming the choice for high-volume bridge and pavement pours. Three models are available with many accessories, so there's an allen finisher for every bridge and pavement pour.

**6048B**

166 foot length, 48" deep truss with transition to 66" deep truss  
(Consult factory for widths in excess of 120')


**6038B**

With dual finishing carriages


**6038B**

With single drag pan and burlap drag


**4838B**

With optional end jack swing-outs





POWERED BY  
**KOHLER****6038B**

## OPTIONS & ACCESSORIES

Our Bridge Deck Finishers are fully customizable and can be configured to meet most any bridge deck or paving project.



End Jack Swing Outs  
(Optional)



Power Crown  
(Optional)



Power Up/Down Jacks  
(Optional on 4836B and 6036B. Standard on 6048B)

DESCRIPTION	4836B	6036B	6048B
<b>OPERATOR'S CONSOLE ENGINE</b>	Kohler CH740 (725 cc)	Kohler CH740 (725 cc)	Kohler CH740 (725 cc)
<b>HORSEPOWER CLASS</b>	25 hp (18 kW)	25 hp (18 kW)	25 hp (18 kW)
<b>FUEL TYPE</b>	Air Cooled Gasoline	Air Cooled Gasoline	Air Cooled Gasoline
<b>PAVING CARRIAGE ENGINE</b>	Kohler CH740 (725 cc)	Kohler CH740 (725 cc)	Kohler CH740 (725 cc)
<b>HORSEPOWER CLASS</b>	25 hp (18 kW)	25 hp (18 kW)	25 hp (18 kW)
<b>FUEL TYPE</b>	Air Cooled Gasoline	Air Cooled Gasoline	Air Cooled Gasoline
<b>MAXIMUM WIDTH ***</b>	90 ft (27.4 m)	90 ft (27.4 m)	120 ft (36.5 m)
<b>PAVING ROLLERS</b>	Dual 48 in (121.9 cm)	Dual 60 in (152.3 cm)	Dual 60 in (152.3 cm)
<b>AUGERS</b>	Dual 8 in (203 mm) Adjustable	Dual 8 in (203 mm) Adjustable	Dual 8 in (203 mm) Adjustable
<b>SECTION WIDTHS AVAILABLE</b>	3, 4, 6, 12 and 15 ft (1, 1.2, 1.8, 3.7 & 4.6 m)	3, 4, 6, 12 and 15 ft (1, 1.2, 1.8, 3.7 & 4.6 m)	3, 4, 6, 12 and 15 ft (1, 1.2, 1.8, 3.7 & 4.6 m)
<b>BOGIES-DRIVER*</b>	Two Cupped Wheels - 36 in (91.4 cm)	Two Cupped Wheels - 36 in (91.4 cm)	Two Cupped Wheels - 48 in (121.9 cm)
<b>BOGIES-IDLE*</b>	Two Cupped Wheels - 36 in (91.4 cm)	Two Cupped Wheels - 36 in (91.4 cm)	Two Cupped Wheels - 48 in (121.9 cm)
<b>JACKS (WITH SOLID LEG PLATES)**</b>	4 - 44 in (10.1 to 111.8 cm) Vertical Adjustment	4 - 44 in (10.1 to 111.8 cm) Vertical Adjustment	6 - 44 in (15.2 to 111.8 cm) Vertical Adjustment
<b>JACKS HEIGHT ADJUSTMENT</b>	Manual - 4 in (10.1 cm) 6 in (15.2 cm) Manual & Powered optional	Manual - 4 in (10.1 cm) 6 in (15.2 cm) Manual & Powered optional	Powered - 6 in (15.2 cm)

\* Other Wheel options available

\*\* Pivot leg plates optional

\*\*\* Consult factory for wider widths

Consult factory for additional specs & options



# TRIPLE ROLLER TUBE PAVERS

Allen Triple Roller Tube Pavers (TRTP) are specifically designed for paving large projects fast, accurately and efficiently. Powered by rugged gasoline or diesel engines, with easy-to-operate control systems, and with our precision engineered and level-tested roller tubes, you can be assured of producing the flattest paving job possible.

## 255T4

**NEW MODEL!**



Optional gang vibration system for up to 24" (61cm) deep concrete consolidation

Vibrator head diameter: 2 3/8" (6 cm)  
Vibrator head length: 23 5/8" (60 cm)

POWERED BY



Three super-flat roller tubes

Vibrator spacing: 24" (61cm) center to center with radius of effectiveness up to 19" (48 cm)

Pendulum shaft driven vibrators can be adjusted from 0 – 11,000 vpm from operator console

Water spray system keeps tubes clean and smooth







DESCRIPTION	255T4	150B
ENGINE	Hatz 4H50TIC (T4F)	Kohler CH1000 (999cc)
HORSEPOWER CLASS	49.5 hp (36.4 kW)	37 hp (27.6 kW)
FUEL TYPE	Diesel	Air-Cooled Gasoline
WIDTHS AVAILABLE (2 FT INCREMENTS)	12 - 34 ft (3.6 - 10.4 m)	12 - 32 ft (3.6 - 9.7 m)
WEIGHT AT 22 FT	5,570 lb (2,526 kg)	2,790 (1,266 kg)
ROLLER TUBE DIAMETER	10 in (25.5 cm)	6.625 in (16.8 cm)
TUBE WEIGHT PER FT	27 lb (12 kg)	19 lb (9 kg)
HYDRAULIC OIL RESERVOIR	25 gal (95 L)	13.5 gal (41 L)
HYDRAULIC SPRAY SYSTEM	Standard	Standard
HYDRAULIC STEERING LEG	Standard	Standard



**150B**



## STEEL EDGE FORMS AND ACCESSORIES

Allen offers a complete line of steel edge forms, including straight forms, radius forms and heavy-duty paving forms.







**allen**  
**ENGINEERING**  
CORPORATION

PARAGOULD, AR 72450 USA | [WWW.ALLENENG.COM](http://WWW.ALLENENG.COM)  
800.643.0095 (USA ONLY) / 870.236.7751