
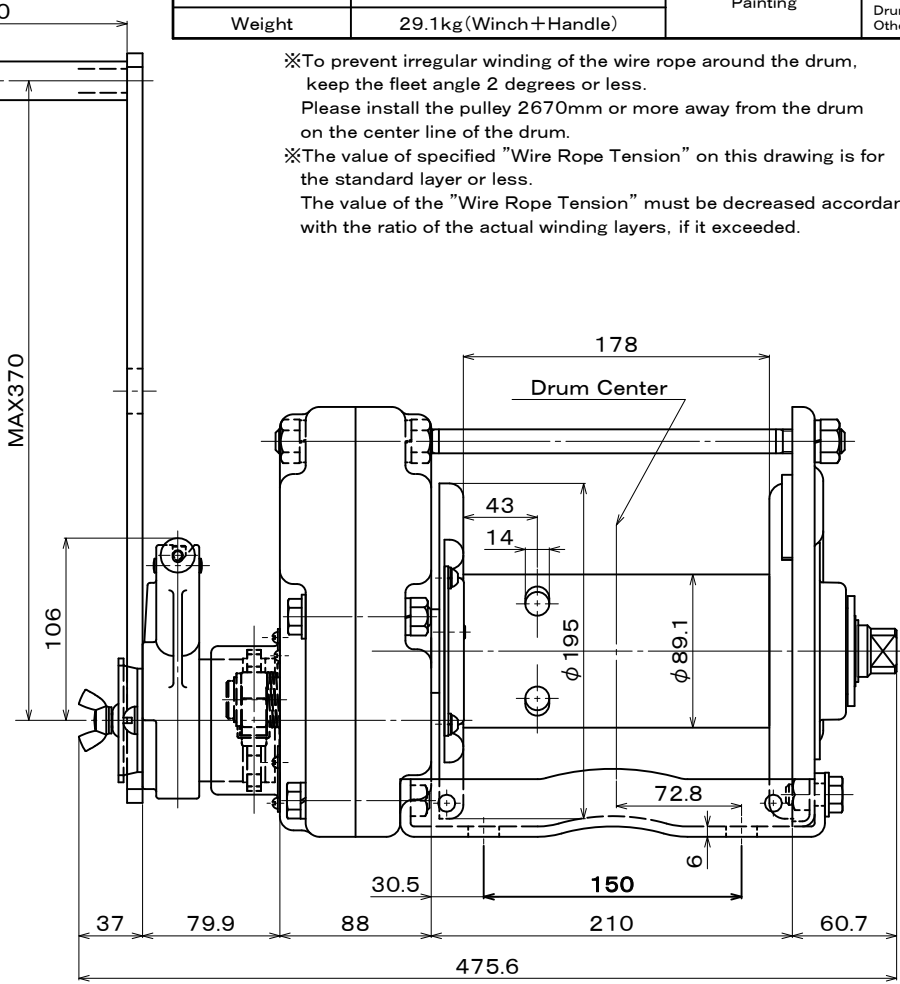


Specifications				(The wire rope composition is a manufacturer recommendation.)	
Load Rating Wire Rope Tension	19,600N (= 2,000kgf) 3rd Layer (Standard Layer)	Handle Force	Handle Length 370mm	Number of Wire Rope Winding Layer	
Drum Capacity	Wire Rope 5-Layer Windings φ 9mm (6 × 37), JIS × 38m		Wire Rope Tension 19,600N	1st Layer 157N (= 16.0kgf)	2nd Layer 186N (= 18.9kgf)
Gear Ratio	1/20	Standard Accessories		One Handle	
Effective Handle Length	370mm (Maximum)	Painting		Melamine Resin Coating At Two Layers Painting Color Drum : Black (Munsell N1 Semi Gloss) Others : Munsell 7.5YR6/11	
Weight	29.1kg (Winch + Handle)				

※To prevent irregular winding of the wire rope around the drum, keep the fleet angle 2 degrees or less. Please install the pulley 2670mm or more away from the drum on the center line of the drum.

※The value of specified "Wire Rope Tension" on this drawing is for the standard layer or less. The value of the "Wire Rope Tension" must be decreased accordance with the ratio of the actual winding layers, if it exceeded.

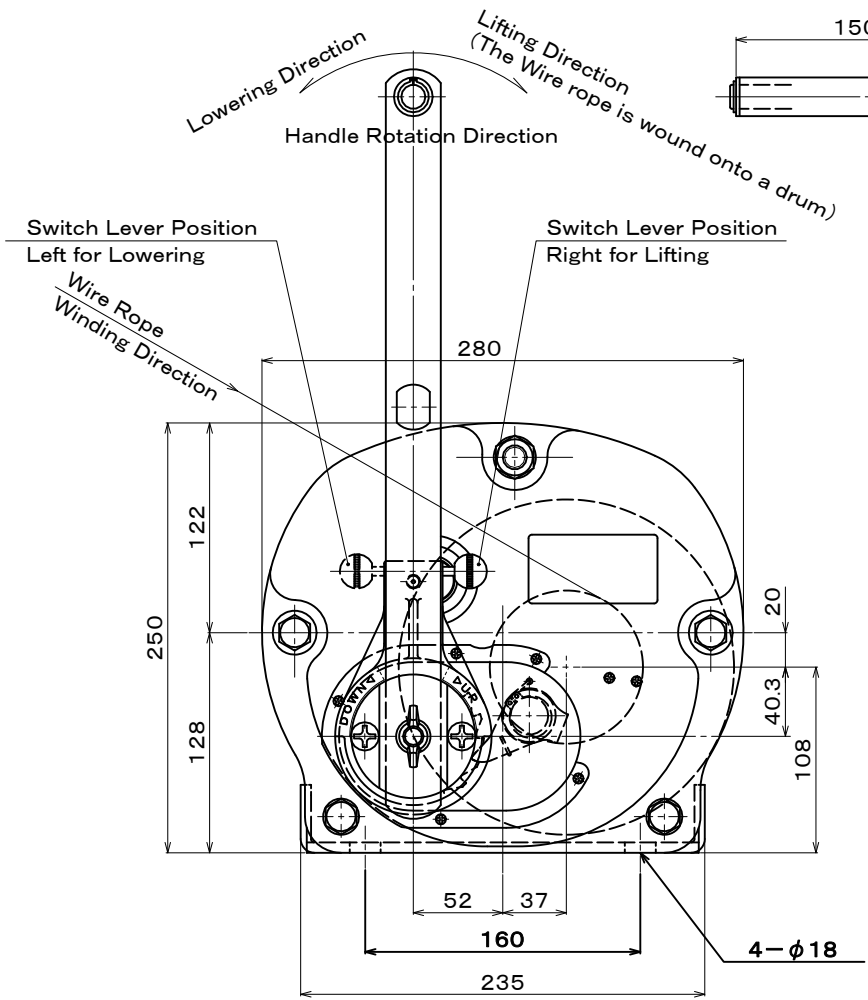

△ ×	..	図面番号 / DRAWING No.	MR20SI-160804-01E	改訂番号 / REVISION No.	00	お客様 / CUSTOMER		符号 / MARK	項目 / PARTICULARS	材料 / MATERIAL	数量 / QTY	単体合計 / PER ONE TOTAL	備考 / REMARKS
△ ×	..	承認 / APPROVED	検図 / CHECKED	作成 / DRAWN	図面名 / TITLE	MAXPULL WINCH STOPPER ARMLESS RATCHET TYPE MODEL MR-20-SI		投影法 / PROJECTION METHOD	第三角法 / THIRD ANGLE PROJECTION	MAXPULL MACHINERY & ENGINEERING CO. LTD. マックスフル工業株式会社			
△ ×	..	米澤	松嶺	武松		尺度 / SCALE	台数 / QTY						
△ ×	..												
改訂 / REVISION	..												