


BUILDINGS
EXISTING
 BASEMENT 800² FT (STORAGE ONLY)
 MAIN 1074² FT
 * EXIST HANDICAP RESTROOM 4'-1.1" x 8'-6"
ADDITION
 LEVEL-0 (5MM) 7245² FT (STORAGE ONLY!)
 LEVEL-1 (MAIN) 7245² FT
 LEVEL-2 7245² FT
 TOTAL 2173.5² FT

AUTO PARKING
 (1) HANDICAP STALL 16'x18'
 (18) PERPENDICULAR STALL 9'x18'
 (5) PARALLEL STALL 9'x20'
 * 17 TOTAL STALLS

LAND USE
 * ASPHALT 10607² FT 66.03%
 * LANDSCAPE 3657² FT 22.78%
 * BUILDING 1796² FT 11.19%
 * TOTAL 6054.0² FT (.37 ACR.)



CODE ANALYSIS

OCCUPANCY CLASSIFICATION TYPE: 5-B

Code Analysis for Beauty Salon
 284 East 4500 South
 Murray, Utah 84107

OCCUPANCY GROUP = B
 TYPE OF CONSTRUCTION: V-B
 ALLOWABLE FLOOR AREA CALCULATIONS:

1st floor: 1,736 sf
 2nd floor: 662 sf
 Basement: 662 sf
 Total = 3,060 sf
 Allowable (IBC 2000, Table 503) = 9,000 sf

OCCUPANCY AND AREA SEPARATIONS:

Not applicable, building is a single Occupancy Group and does not exceed the allowable square footage.

BUILDING HEIGHTS: Two-story/23'-2" at highest point

ANALYSIS OF HOW REQUIREMENTS FOR TYPE OF CONSTRUCTION WILL BE ACHIEVED (IBC 2000, TABLE 601 AND 602)

Table 601 for V-B = No requirements
 Table 602 (between 10' and 30' to the property line, 5: V-B) = No requirements

MEANS OF EGRESS PLAN:
 Shows on Dwg #2

EXITS
 Occupant Load (Table 1003.2.2.2)

1st floor: 1,736/100 (Table 1003.2.2.2) = 18 persons
 2nd floor: 662/100 (Table 1003.2.2.2) = 7 persons

Required Number of Exits (Table 1004.2.1)

3 Occupancy with occupant load under 50 = 1 exit

ROOM SCHEDULE

101	FOYER	201	STAIRS
102	THERAPY	202	THERAPY
103	THERAPY	203	THERAPY
104	DRYING	204	THERAPY
105	WASH	001	STORAGE
106	STYLING	002	Common
107	UNISEX RESTROOM	003	JANITORY
108	WAITING ROOM	004	STORAGE
109	SUN ROOM	005	STORAGE
110	RECEPTION	006	STORAGE

BASEMENT
 NO PUBLIC ACCESS

DOOR SCHEDULE

SYM	QUAN	SIZE	DESCRIPTION
1	1	3'-0" x 6'-8"	RIGHT HAND PASSAGE WJWS 6 RAISED PANELS
2	3	3'-0" x 6'-8"	RIGHT HAND PASSAGE WJWS
3	3	3'-0" x 6'-8"	LEFT HAND PASSAGE WJWS
4	2	4'-0" x 4'-0"	INSULATED VINYL SLIDER WINDOW
5	1	4'-0" x 4'-0"	"
6	1	3'-0" x 3'-0"	"
7	2	4'-0" x 2'-6"	"
8	1	4'-0" x 2'-6"	"
9	1	3'-0" x 4'-0"	"
10	1	3'-0" x 6'-8"	LEFT HAND PASSAGE WJWS 1 HOUR FIRE RATED
11	1	3'-0" x 6'-8"	LEFT HAND EMER. EXIT WJWS INSIDE ONLY
12	1	3'-0" x 6'-8"	EXISTING FRONT DOOR
13	1	3'-0" x 6'-8"	LEFT HAND 1 HOUR FIRE RATED DOOR

ADA LEVER LOCK
 ADA LEVER LOCK HANDLES
 KEYS LEVER LOCK HANDLES

KEYED LEVER LOCK HANDLES NO PUBLIC ACCESS

PROPERTY OWNER
 NAME: SR. DAVID SCHNEIDER
 ADDRESS: 1258 EAST 3500 SOUTH
 SALT LAKE CITY, UT 84106
 PHONE: 467-7225



BRUNDLE AND BRUNDLE CONSTRUCTION

3589 WEST 500 SOUTH
 SALT LAKE CITY UT 84104-4454
 PHONE 973 7571 FAX 973 8765

DATE: 24 MAY 2000




284 EAST 4500 SOUTH
 MURRAY, UTAH 84107

APPROVED BY: [Signature]

REVISED

DRAWING NUMBER



WHERE STRAPS
NOTED ALL
REINFORCED CONCRETE
AND SPECIAL CONCRETE
SEE PART C
FOR THE STRAP
LOCATIONS

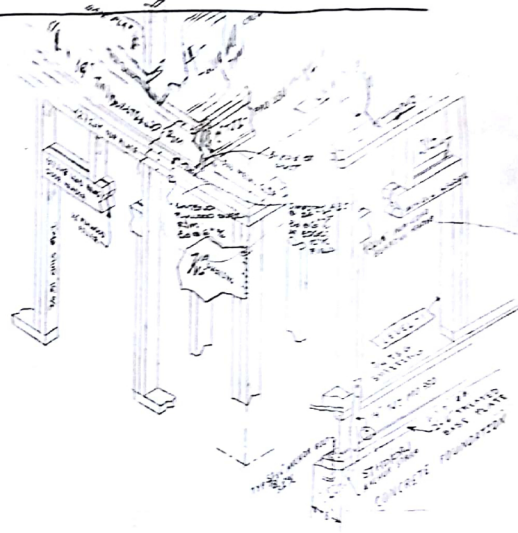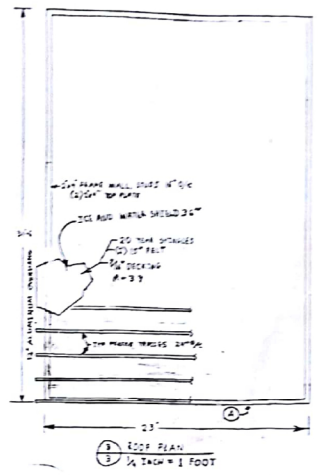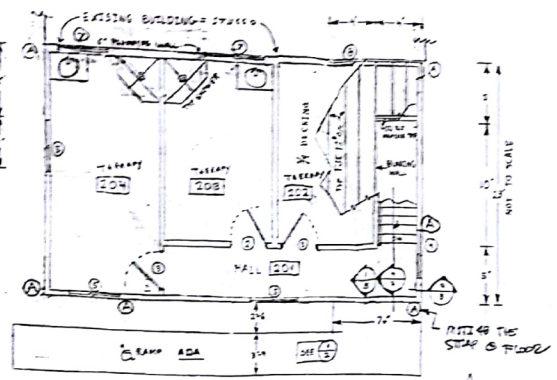

1 FLOOR PLAN (EXISTING SHOWN)
1/4" INCH = 1 FOOT

2 ROOF PLAN
1/4" INCH = 1 FOOT


3 FRAMING DETAIL
1/4" INCH = 1 FOOT

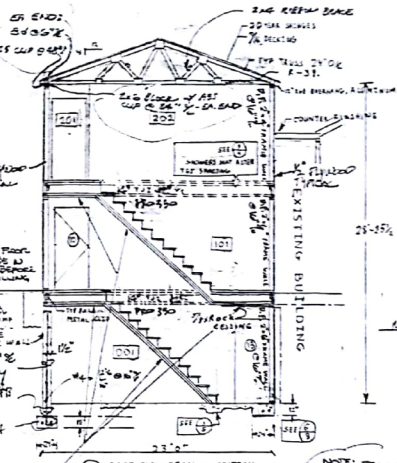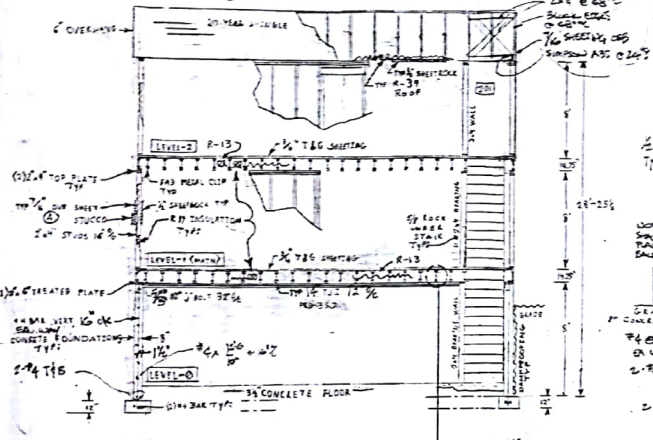

WALL WALL SHEATHING w/ 5/8\"/>

GLUE AND NAIL FLOOR SHEATHING w/ 1/2\"/>

WALL ROOF SHEATHING w/ 5/8\"/>



4 FOOTING DETAIL
1/4" INCH = 1 FOOT

5 SOUTH ELEVATION AND SECTION
1/4" INCH = 1 FOOT

6 EAST ELEVATION AND SECTION
1/4" INCH = 1 FOOT

- NOTES
- (A) STUCCO FINISH
 - (B) FLOOR CONCRETE (4\"/>
 - (C) WALLS: 2x4\"/>
 - (D) X SHEET ROOFING AND PAINT (SEE NOTED IN PLAN)
 - (E) ROOF GABLES
 - (F) CEILING: INSULATE, 1/2\"/>
 - (G) 12\"/>

NOTE: PROVIDE FIELD OBSERVATION REPORT FROM GEOTECH. LAB AFTER EVALUATION. GALVANIZING 15000 PPT SOLEING.

The 1-hour assembly for this application is: Base layer 5/8\"/>

Type N gypsum wallboard applied at right angle to joint or joint 24\"/>

Face layer 5/8\"/>

Type N gypsum wallboard on vertical base applied at right angle to joint or joint through base layer with 1.75\"/>

intermediate joint at trim. Face layer Type G drywall across placed 2\"/>



BRANDS AND FINISHES
CONSTRUCTION

DATE

SCALE

- 1 PANEL A HEAT FLOOR EX. REG
- 2 PANEL B HEAT FLOOR EX. REG
- 3 PANEL C HEAT FLOOR PROPOSED REG
- 4 LOWER HANGING 100 AMP 20 SPACE PANEL WITH 2 FUSE DISCONNECT IN PANEL
- 5 1/2" #2 COPPER WOUND BUSBARS WITH 8 X COPPER BRASS INTERLOCK TO BE SANG FOR 20 AMP 150 VOLT CIRCUITS
- 6 1/2" #2 PINK 50 AMP CIRCUIT TO BE INSTALLED CURRENT

