
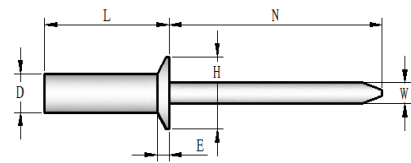


Closed End Rivets

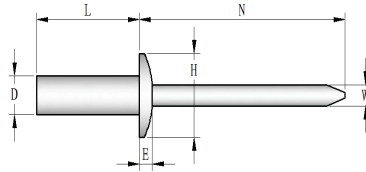

Aluminum / Stainless Steel

5056 Aluminum Body / 304 Stainless Steel Mandrel

Countersunk Head (120°)

Nominal Body Diameter (D)	Part Number	Body Diameter (D)	Grip Range (Min) (Max)	Hole Size & Drill No.	Body Length MAX (L)	Minimum Mandrel Protrusion (N)	Mandrel Diameter (W)	Flange (head) Diameter (H)	Flange (head) Thickness (Ref)(E)	Typical Shear min Lbs.	Typical Tensile min Lbs.
3/16	AKSSH-06-04	0.188	0.188 - 0.250	.192-.196 #11	0.601	1.06	0.110	0.375 ±.019	0.060	500	690

Domed Head

3/16	ADSSH-06-04	0.188	0.188 - 0.250	.192-.196 #11	0.531	1.06	0.110	0.375 ±.019	0.080	500	690
3/16	ADSSH-06-06	0.188	0.251 - 0.375	.192-.196 #11	0.656	1.06	0.110	0.375 ±.019	0.080	500	690
3/16	ADSSH-06-08	0.188	0.376 - 0.500	.192-.196 #11	0.781	1.06	0.110	0.375 ±.019	0.080	500	690