



Quality Wholesale Window Coverings
Contract • Hospitality • Healthcare • Residential

STYLE 5000

WEAVING
EXCELLENCE
WITH
INNOVATION



		SOLAR OPTICAL PROPERTIES				SHGC/G VALUE g-tot (glass & blind)	
Code	Color	TS	RS	AS	TV	SINGLE 1/4 CL	INSULATING 1 HA
STYLE 5000							
P60	Bamboo/Birch	21	59	20	18	0.34	0.24
Q43	Marble/Sand	9	48	43	9	0.37	0.26
Q46	Bamboo/Wheat	19	29	52	16	0.50	0.32
Q47	Moire/Mocha	17	23	60	15	0.53	0.33
Q49	Rattan/Umber	18	27	55	12	0.51	0.32
Q50	Bark/Tiger Oak	17	24	59	16	0.52	0.33
Q51	Wicker/Mushroom	15	24	61	11	0.52	0.33
Q53	Honeycomb/ Brown Sugar	19	26	55	15	0.52	0.33
Q61	Bark/Ash	8	29	63	11	0.48	0.31
Q62	Bark/Pewter	11	35	54	13	0.45	0.30
Q63	Linen/Pearl	36	50	14	33	0.42	0.28
Q64	Linen/Taupe	22	39	39	20	0.45	0.30
Q65	Linen/Clay	23	32	45	23	0.50	0.31
Q66	Metro/Platinum	29	31	40	28	0.51	0.32
Q94	Tweed/Oatmeal	11	34	55	10	0.46	0.30
Q95	Tweed/Buckeye	9	28	63	9	0.49	0.31
Q96	Thatch/Wheatgrass	11	26	63	11	0.50	0.32
R11	Linen/Cranberry	7	17	76	8	0.54	0.34
R12	Linen/Cinnamon	6	20	74	8	0.52	0.33
R85	Jute/Parchment	13	70	17	10	0.26	0.21
R86	Jute/Flax	30	56	14	27	0.37	0.26
R87	Jute/Latte	24	50	26	21	0.40	0.27
R88	Jute/Coffee	5	15	80	5	0.55	0.35
R89	Chenille/Marshmallow	16	67	17	15	0.29	0.22
R90	Chenille/Pearl	32	53	15	29	0.40	0.27
R91	Chenille/Honey	26	47	27	24	0.42	0.28
R92	Chenille/Driftwood	12	26	62	14	0.50	0.32
R93	Wicker/Straw	14	48	38	13	0.39	0.27
R95	Bark/Sienna	6	16	78	6	0.55	0.34
U10	Linen/Topaz	11	24	65	10	0.51	0.33
U11	Linen/Burlap	10	30	60	9	0.48	0.31
U12	Linen/Cream	22	46	31	21	0.42	0.28
U16	Crepe/ Toasted Coconut	24	40	36	25	0.45	0.31
U24	Seaglass/Silver	33	27	40	37	0.54	0.34
U28	Seaglass/Chardonnay	40	43	17	41	0.47	0.30
U29	Seaglass/Crystal	44	49	7	45	0.44	0.29
V88	Linen/Fig	6	15	79	8	0.55	0.35

Original artwork and original designs are protected under U.S. copyright laws. The samples attached to this notice fall under the federal statute and are therefore protected. Slight changes in the color combinations or weave pattern do not remove your legal obligation. If you would like further information regarding the copyright status of a pattern, please call the market manager representative at 1/800-221-5497 and refer to the style number.

PROTECTION THAT LIVES ON
MICROBAN®

Microban® antimicrobial protection inhibits the growth of stain-causing bacteria, mold and mildew on the shade.



PRODUCT CERTIFIED FOR
LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818



MIF Seal of Approval



TS = Solar Transmittance
RS = Solar Reflectance
AS = Solar Absorptance
TV = Visual Transmittance

SHGC = Solar Heat Gain Coefficient

1/4 CL = 1/4" Clear Glass
1 HA = 1" Heat Absorbing Glass

Fabrics Installed Internally
Zero-Degree Profile Angle

For additional performance values, test references and technical definitions visit us at www.phifer.com.



U12
Linen/
Cream


U11
Linen/
Burlap

U10
Linen/
Topaz

R12
Linen/
Cinnamon

R11
Linen/
Cranberry

V88
Linen / Fig

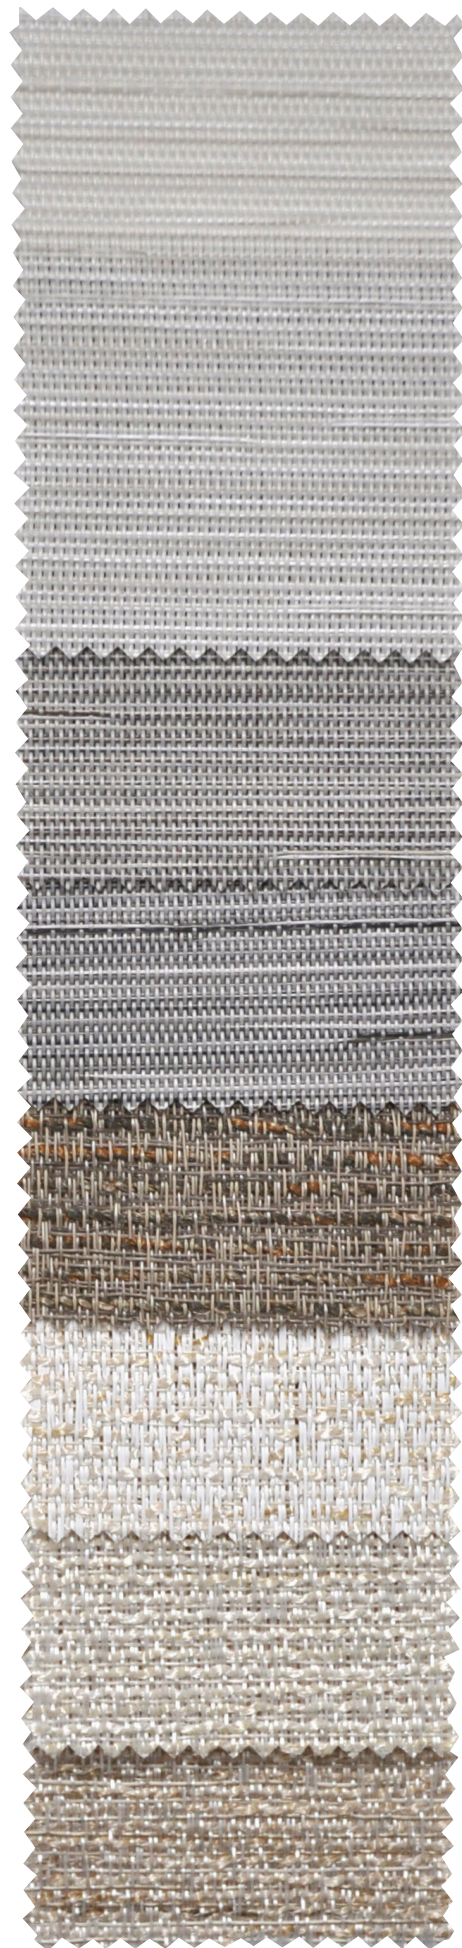

Q63
Linen / Pearl

Q64
Linen / Taupe

Q65
Linen / Clay

R92
Chenille /
Driftwood

R89
Chenille /
Marshmallow

R90
Chenille /
Pearl

R91
Chenille /
Honey



R85
Jute /
Parchment

R86
Jute / Flax

R87
Jute / Latte

R88
Jute / Coffee

P60
Bamboo /
Birch

Q46
Bamboo /
Wheat

U16
Crepe /
Toasted
Coconut



Q61
Bark / Ash

Q50
Bark / Tiger
Oak

R95
Bark / Sienna

Q62
Bark / Pewter

U29
Seaglass /
Crystal

U28
Seaglass /
Chardonnay

U24
Seaglass /
Silver



Q66
Metro /
Platinum

Q43
Marble /
Sand

Q53
Honeycomb /
Brown Sugar

Q96
Thatch /
Wheatgrass

Q49
Rattan /
Umber

Q47
Moire /
Mocha



Q95
Tweed /
Buckeye

Q94
Tweed /
Oatmeal

R93
Wicker /
Straw

Q51
Wicker /
Mushroom

P60 Bamboo/Birch

COMPOSITION: 28% Polyester, 72%

Vinyl on Polyester

MESH WEIGHT: 14.5 oz/yd²
(492 g/m²)

FABRIC THICKNESS: 0.038 in.
(0.97 mm)

OPENNESS FACTOR: Approx. 10%

UV BLOCKAGE: Approx. 90%

FIRE CLASSIFICATION: California US Title 19 (small scale), NFPA 701 TM#1 (small and large scale), BS 5867 Part 2 Type B Performance, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q43 Marble/Sand

COMPOSITION: 28% Polyester, 72%

Vinyl on Polyester

MESH WEIGHT: 14.5 oz/yd²
(492 g/m²)

FABRIC THICKNESS: 0.038 in.
(0.97 mm)

OPENNESS FACTOR: Approx. 5%

UV BLOCKAGE: Approx. 95%

FIRE CLASSIFICATION: California US Title 19 (small scale), NFPA 701 TM#1 (small and large scale), BS 5867 Part 2 Type B Performance, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q46 Bamboo/Wheat

COMPOSITION: 27% Polyester, 68%

Vinyl on Polyester, 5% Olefin

MESH WEIGHT: 14.3 oz/yd²
(485 g/m²)

FABRIC THICKNESS: 0.044 in.
(1.12 mm)

OPENNESS FACTOR: Approx. 7%

UV BLOCKAGE: Approx. 93%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q47 Moire/Mocha

COMPOSITION: 26% Polyester, 68%

Vinyl on Polyester, 6% Olefin

MESH WEIGHT: 12.3 oz/yd²
(417 g/m²)

FABRIC THICKNESS: 0.035 in.
(0.89 mm)

OPENNESS FACTOR: Approx. 7%

UV BLOCKAGE: Approx. 93%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q49 Rattan/Umber

COMPOSITION: 27% Polyester, 68%

Vinyl on Polyester, 5% Olefin

MESH WEIGHT: 14.3 oz/yd²
(485 g/m²)

FABRIC THICKNESS: 0.044 in.
(1.12 mm)

OPENNESS FACTOR: Approx. 7%

UV BLOCKAGE: Approx. 93%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q50 Bark/Tiger Oak

Q51 Wicker/Mushroom

COMPOSITION: 27% Polyester, 68%

Vinyl on Polyester, 5% Olefin

MESH WEIGHT: 14.3 oz/yd²
(485 g/m²)

FABRIC THICKNESS: 0.044 in.
(1.12 mm)

OPENNESS FACTOR: Approx. 5%

UV BLOCKAGE: Approx. 95%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q53 Honeycomb/Brown Sugar

COMPOSITION: 26% Polyester, 67%

Vinyl on Polyester, 7% Olefin

MESH WEIGHT: 13.0 oz/yd²
(441 g/m²)

FABRIC THICKNESS: 0.037 in.
(0.94 mm)

OPENNESS FACTOR: Approx. 10%

UV BLOCKAGE: Approx. 90%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q61 Bark/Ash

COMPOSITION: 72% Vinyl on

Polyester, 28% Polyester

MESH WEIGHT: 16.1 oz/yd²
(546 g/m²)

FABRIC THICKNESS: 0.043 in.
(1.09 mm)

OPENNESS FACTOR: Approx. 5%

UV BLOCKAGE: Approx. 95%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q62 Bark/Pewter

COMPOSITION: 72% Vinyl on

Polyester, 28% Polyester

MESH WEIGHT: 15.3 oz/yd² (519 g/m²)

FABRIC THICKNESS: 0.042 in.
(1.07 mm)

OPENNESS FACTOR: Approx. 5%

UV BLOCKAGE: Approx. 95%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q63 Linen/Pearl

COMPOSITION: 72% Vinyl on

Polyester, 28% Polyester

MESH WEIGHT: 15.4 oz/yd²
(522 g/m²)

FABRIC THICKNESS: 0.035 in.
(0.89 mm)

OPENNESS FACTOR: Approx. 5%

UV BLOCKAGE: Approx. 95%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q64 Linen/Taupe

COMPOSITION: 72% Vinyl on

Polyester, 28% Polyester

MESH WEIGHT: 16.3 oz/yd²
(553 g/m²)

FABRIC THICKNESS: 0.035 in.
(0.89 mm)

OPENNESS FACTOR: Approx. 5%

UV BLOCKAGE: Approx. 95%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q65 Linen/Clay

COMPOSITION: 72% Vinyl on Polyester, 28% Polyester

MESH WEIGHT: 15.5 oz/yd² (526 g/m²)

FABRIC THICKNESS: 0.035 in.
(0.89 mm)

OPENNESS FACTOR: Approx. 7%

UV BLOCKAGE: Approx. 93%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q66 Metro/Platinum

COMPOSITION: 67% Vinyl on

Polyester, 26% Polyester, 7% Olefin

MESH WEIGHT: 12.5 oz/yd²
(424 g/m²)

FABRIC THICKNESS: 0.030 in.
(0.76 mm)

OPENNESS FACTOR: Approx. 5%

UV BLOCKAGE: Approx. 95%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q94 Tweed/Oatmeal

COMPOSITION: 36% Polyester, 64%

Vinyl on Polyester

MESH WEIGHT: 13.7 oz/yd²
(465 g/m²)

FABRIC THICKNESS: 0.036 in.
(0.91 mm)

OPENNESS FACTOR: Approx. 5%

UV BLOCKAGE: Approx. 95%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q95 Tweed/Buckeye

COMPOSITION: 37% Polyester, 63%

Vinyl on Polyester

MESH WEIGHT: 13.6 oz/yd²
(461 g/m²)

FABRIC THICKNESS: 0.038 in.
(0.97 mm)

OPENNESS FACTOR: Approx. 5%

UV BLOCKAGE: Approx. 95%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q96 Thatch/Wheatgrass

COMPOSITION: 27% Polyester, 68%

Vinyl on Polyester, 5% Olefin

MESH WEIGHT: 13.5 oz/yd²
(458 g/m²)

FABRIC THICKNESS: 0.037 in.
(.094 mm)

OPENNESS FACTOR: Approx. 7%

UV BLOCKAGE: Approx. 93%

FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R11 Linen/Cranberry
R12 Linen/Cinnamon
COMPOSITION: 45% Polyester, 55% Vinyl on Polyester
MESH WEIGHT: 14.1 oz/yd² (478 g/m²)
FABRIC THICKNESS: 0.40 in. (1.02 mm)
OPENNESS FACTOR: Approx. 3%
UV BLOCKAGE: Approx. 97%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R85 Jute/Parchment
COMPOSITION: 49% Polyester, 51% Vinyl on Polyester
MESH WEIGHT: 17.2 oz/yd² (584 g/m²)
FABRIC THICKNESS: 0.040 in. (1.02 mm)
OPENNESS FACTOR: Approx. 1%
UV BLOCKAGE: Approx. 99%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), ASTM E 84 (Class 1) and IBC Section 803.1.1 (Class A Rating)

R86 Jute/Flax
COMPOSITION: 49% Polyester, 51% Vinyl on Polyester
MESH WEIGHT: 16.70 oz/yd² (566 g/m²)
FABRIC THICKNESS: 0.039 in. (0.99 mm)
OPENNESS FACTOR: Approx. 1%
UV BLOCKAGE: Approx. 99%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), ASTM E 84 (Class 1) and IBC Section 803.1.1 (Class A Rating)

R87 Jute/Latte
COMPOSITION: 49% Polyester, 51% Vinyl on Polyester
MESH WEIGHT: 16.62 oz/yd² (564 g/m²)
FABRIC THICKNESS: .039 in. (0.99 mm)
OPENNESS FACTOR: Approx. 1%
UV BLOCKAGE: Approx. 99%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R88 Jute/Coffee
COMPOSITION: 49% Polyester, 51% Vinyl on Polyester
MESH WEIGHT: 16.88 oz/yd² (572 g/m²)
FABRIC THICKNESS: 0.039 in. (0.99 mm)
OPENNESS FACTOR: Approx. 1%
UV BLOCKAGE: Approx. 99%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R89 Chenille/Marshmallow
COMPOSITION: 49% Polyester, 51% Vinyl on Polyester
MESH WEIGHT: 16.43 oz/yd² (557 g/m²)

FABRIC THICKNESS: 0.048 in. (1.22 mm)
OPENNESS FACTOR: Approx. 3%
UV BLOCKAGE: Approx. 97%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R90 Chenille/Pearl
COMPOSITION: 49% Polyester, 51% Vinyl on Polyester
MESH WEIGHT: 15.6 oz/yd² (529 g/m²)
FABRIC THICKNESS: 0.044 in. (1.12 mm)
OPENNESS FACTOR: Approx. 3%
UV BLOCKAGE: Approx. 97%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R91 Chenille/Honey
COMPOSITION: 49% Polyester, 51% Vinyl on Polyester
MESH WEIGHT: 16.34 oz/yd² (554 g/m²)
FABRIC THICKNESS: 0.045 in. (1.14 mm)
OPENNESS FACTOR: Approx. 3%
UV BLOCKAGE: Approx. 97%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R92 Chenille/Driftwood
COMPOSITION: 49% Polyester, 51% Vinyl on Polyester
MESH WEIGHT: 15.0 oz/yd² (509 g/m²)
FABRIC THICKNESS: 0.047 in. (1.19 mm)
OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R93 Wicker/Straw
COMPOSITION: 49% Polyester, 51% Vinyl on Polyester
MESH WEIGHT: 15.68 oz/yd² (532 g/m²)
FABRIC THICKNESS: 0.045 in. (1.14 mm)
OPENNESS FACTOR: Approx. 3%
UV BLOCKAGE: Approx. 97%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

R95 Bark/Sienna
COMPOSITION: 43% Polyester, 57% Vinyl on Polyester
MESH WEIGHT: 16.26 oz/yd² (551 g/m²)
FABRIC THICKNESS: 0.054 in. (1.37 mm)
OPENNESS FACTOR: Approx. 3%
UV BLOCKAGE: Approx. 97%
FIRE CLASSIFICATION: California

Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

U10 Linen/Topaz
V88 Linen/Fig
COMPOSITION: 45% Polyester, 55% Vinyl on Polyester
MESH WEIGHT: 14.1 oz/yd² (478 g/m²)
FABRIC THICKNESS: 0.040 in. (1.02 mm)
OPENNESS FACTOR: Approx. 3%
UV BLOCKAGE: Approx. 97%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

U11 Linen/Burlap
COMPOSITION: 43% Polyester, 57% Vinyl on Polyester
MESH WEIGHT: 16.1 oz/yd² (546 g/m²)
FABRIC THICKNESS: 0.046 in. (1.17 mm)
OPENNESS FACTOR: Approx. 3%
UV BLOCKAGE: Approx. 97%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

U12 Linen/Cream
COMPOSITION: 43% Polyester, 57% Vinyl on Polyester
MESH WEIGHT: 16.1 oz/yd² (546 g/m²)
FABRIC THICKNESS: 0.052 in. (1.32 mm)
OPENNESS FACTOR: Approx. 3%
UV BLOCKAGE: Approx. 97%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

U16 Crepe/Toasted Coconut
COMPOSITION: 28% Polyester, 72% Vinyl on Polyester
MESH WEIGHT: 14.3 oz/yd² (485 g/m²)
FABRIC THICKNESS: 0.039 in. (0.99 mm)
OPENNESS FACTOR: Approx. 10%
UV BLOCKAGE: Approx. 90%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

U24 Seaglass/Silver
U28 Seaglass/Chardonnay
U29 Seaglass/Crystal
COMPOSITION: 28% Polyester, 72% Vinyl on Polyester
MESH WEIGHT: 14.3 oz/yd² (485 g/m²)
FABRIC THICKNESS: 0.039 in. (0.99 mm)
OPENNESS FACTOR: Approx. 10%
UV BLOCKAGE: Approx. 90%
FIRE CLASSIFICATION: California Technical Bulletin 117 Sect. E. Part 1, NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

STYLE 5000 SPECIFICATIONS

SheerWeave Style 5000 features fabrics that combine textured yarns with traditional patterns. With a color palette of hushed naturals and rich earth tones, this collection offers a range of classic options designed to suit any style of decor or personal preference. Style 5000 can also be used in exterior roller shades.

FIRE CLASSIFICATION

See individual pattern certifications

Fire classifications are subject to change. Please go to phifer.com for the most current information.

BACTERIA AND FUNGAL RESISTANCE

ASTM E 2180 ASTM G21
Includes Microban antimicrobial additives

ENVIRONMENTAL CERTIFICATION

GREENGUARD GREENGUARD Gold
Certified to these standards for low chemical emissions into indoor air during product usage

LEAD FREE

RoHS/Directive 2002/95/EC REACH (EC 1907/2006) compliant
ANSI/WCMA A 100.1-2007 for lead content
US Consumer Product Safety Commission Section 101

WARRANTY

10-year interior 5-year exterior

ACOUSTICAL PERFORMANCE

NRC (Noise Reduction Coefficient) and SAA (Sound Absorption Average) tested in accordance with ASTM C423-09a

UV PROTECTION

Seal of Approval by the Melanoma International Foundation (MIF) for effectiveness in preventing sun damage to the skin or eyes

STYLE

5000

WIDTHS

74" and 98"
187.96 cm and 248.9 cm

ROLL LENGTH

30 Linear Yards
27.4 m

ACOUSTICAL VALUE

NRC .15 / SAA .16

For additional specification information, please see individual pattern listings.

PHIFER
INCORPORATED

P. O. Box 1700 • Tuscaloosa, Alabama 35403-1700 USA
Phone: 205.345.2120 • FAX: 205.391.0799
Toll Free USA/Canada: 1.800.221.5497
phifer.com • ISO Registered



© SheerWeave is a registered trademark of PHIFER INCORPORATED.
© MICROBAN is a registered trademark of Microban Products Company.
™ UL, the UL logos and the UL mark are trademarks of UL LLC.
Cover photo courtesy of WINDOW INTERIORS, Altamonte Springs, Florida, USA.
© PHIFER INCORPORATED V18B 3033841



STYLE
5000
Custom Collection

WEAVING
EXCELLENCE
WITH
INNOVATION



		SOLAR OPTICAL PROPERTIES				SHGC/G VALUE g-tot (glass & blind)	
Code	Color	TS	RS	AS	TV	SINGLE 1/4 CL	INSULATING 1 HA
STYLE 5000							
P46	Bamboo White/Wheat	17	55	28	12	0.41	0.29
Q35	Bamboo Spt/Brown	12	16	72	14	0.64	0.40
Q88	Wicker/Tiger's Eye	10	18	72	10	0.62	0.39
S73	Twine/Jewel	11	34	55	15	0.53	0.35
S74	Twine/Flagstone	12	20	68	14	0.62	0.39
S75	Twine/Metal	14	17	69	17	0.64	0.40
S76	Twine/Oatmeal	20	45	35	19	0.48	0.32
S77	Contour/Smudge	13	18	69	16	0.63	0.39
S78	Contour/Smoke	9	10	81	11	0.67	0.41
S79	Contour/Natural	8	37	55	10	0.50	0.33
S80	Contour/Essence	30	30	40	33	0.60	0.37
S81	Pavestone	9	37	54	11	0.50	0.34
S82	Coffee	9	11	80	12	0.66	0.41
S83	Aura/Sable	4	14	82	5	0.63	0.40
S84	Aura/Poetry	10	24	66	7	0.59	0.37
S90	Desert	10	37	53	9	0.51	0.34

STYLE 5000 SPECIFICATIONS

SheerWeave Style 5000 features fabrics that combine textured yarns with traditional patterns. With a color palette of hushed naturals and rich earth tones, this collection offers a range of classic options designed to suit any style of decor or personal preference. Style 5000 can also be used in exterior roller shades.

FIRE CLASSIFICATION	See individual pattern certifications <i>Fire classifications are subject to change. It is the user's responsibility to check for the most current fire ratings at phifer.com.</i>	
BACTERIA AND FUNGAL RESISTANCE	ASTM E 2180	ASTM G21 ASTM G22 AATCC30 Part 3 ASTM D 3273 GREENGUARD Mold and Bacteria Standard ASTM 6329 includes Microban antimicrobial additives
ENVIRONMENTAL CERTIFICATION	GREENGUARD	GREENGUARD Gold Certified to these standards for low chemical emissions into indoor air during product usage
LEAD FREE	RoHS/Directive 2002/95/EC REACH (EC 1907/2006) compliant ANSI/WCMA A 100.1-2007 for lead content US Consumer Product Safety Commission Section 101	
WARRANTY	10-year interior	5-year exterior
ACOUSTICAL PERFORMANCE	NRC (Noise Reduction Coefficient) and SAA (Sound Absorption Average) tested in accordance with ASTM C423-09a	
UV PROTECTION	Seal of Approval by the Melanoma International Foundation (MIF) for effectiveness in preventing sun damage to the skin or eyes	
WIDTHS	98" (248.9 cm)	
ROLL LENGTH	30 Linear Yards (27.4 m)	
ACOUSTICAL VALUE	NRC .15 / SAA .16	

Original artwork and original designs are protected under U.S. copyright laws. The samples attached to this notice fall under the federal statute and are therefore protected. Slight changes in the color combinations or weave pattern do not remove your legal obligation. If you would like further information regarding the copyright status of a pattern, please call the market manager representative at 1/800-221-5497 and refer to the style number.

PROTECTION THAT LIVES ON
MICROBAN

Microban® antimicrobial protection inhibits the growth of stain-causing bacteria, mold and mildew on the shade.



PRODUCT CERTIFIED FOR
LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818



MIF Seal of Approval



TS = Solar Transmittance
RS = Solar Reflectance
AS = Solar Absorptance
TV = Visual Transmittance

SHGC = Solar Heat Gain Coefficient

1/4 CL = 1/4" Clear Glass
1 HA = 1" Heat Absorbing Glass

Fabrics Installed Internally
Zero-Degree Profile Angle

For additional performance values, test references and technical definitions visit us at www.phifer.com.



STYLE
5000

S76
Twine /
Oatmeal

S73
Twine /
Jewel

S74
Twine /
Flagstone


S75
Twine /
Metal

S79
Contour /
Natural

S77
Contour /
Smudge

S80
Contour /
Essence

S78
Contour /
Smoke

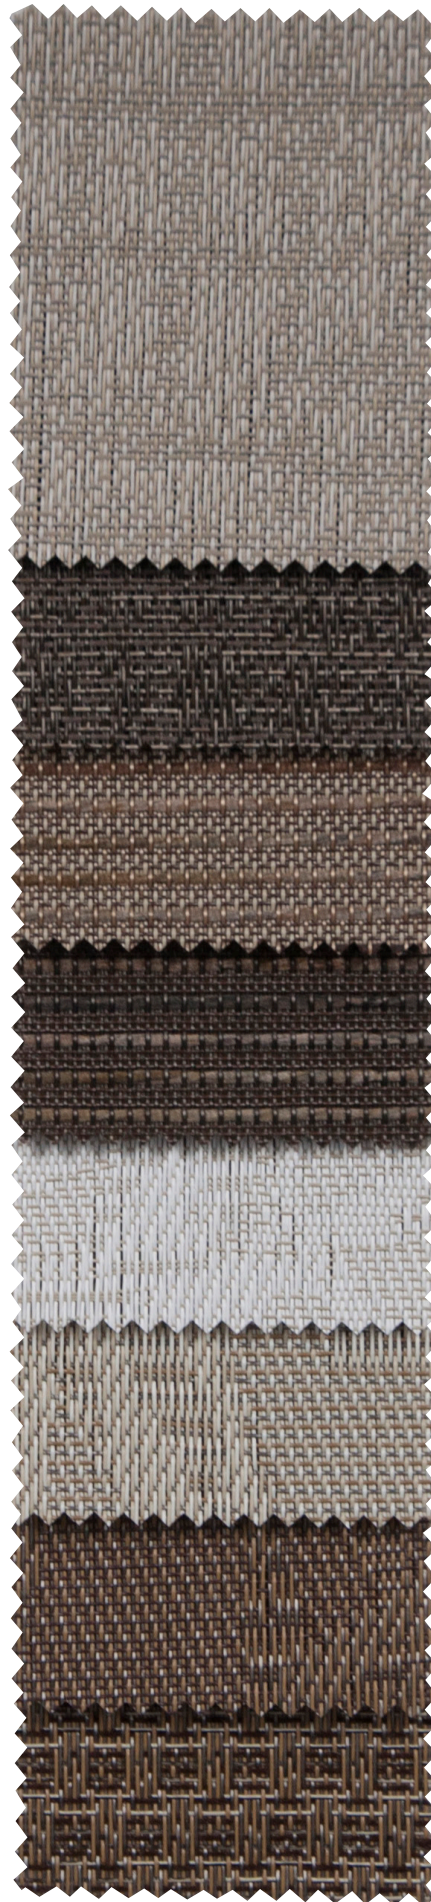

STYLE
5000

S81
Pavestone

S82
Coffee

S84
Aura / Poetry

S83
Aura / Sable

P46
Bamboo
White / Wheat

S90
Desert

Q35
Bamboo
Spt / Brown

Q88
Wicker /
Tiger's Eye

P46 Bamboo White/Wheat

COMPOSITION: 28% Polyester, 72% Vinyl on Polyester
MESH WEIGHT: 13.3 oz/yd² (451 g/m²)
FABRIC THICKNESS: 0.035 in. (0.89 mm)
OPENNESS FACTOR: Approx. 7%
UV BLOCKAGE: Approx. 93%
FIRE CLASSIFICATION: NFPA 701 TM#1, California Technical Bulletin 117 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q35 Bamboo Spt/Brown

COMPOSITION: 28% Polyester, 72% Vinyl on Polyester
MESH WEIGHT: 13.1 oz/yd² (444 g/m²)
FABRIC THICKNESS: 0.029 in. (0.74 mm)
OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: NFPA 701 TM#1, California Technical Bulletin 117 (small scale), NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

Q88 Wicker/Tiger's Eye

COMPOSITION: 26% Polyester, 67% Vinyl on Polyester, 7% Olefin
MESH WEIGHT: 13.9 oz/yd² (471 g/m²)
FABRIC THICKNESS: 0.035 in. (0.89 mm)
OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

S73 Twine/Jewel

COMPOSITION: 28% Polyester, 72% Vinyl on Polyester
MESH WEIGHT: 14.7 oz/yd² (497 g/m²)
FABRIC THICKNESS: 0.041 in. (1.04 mm)
OPENNESS FACTOR: Approx. 7%
UV BLOCKAGE: Approx. 93%
FIRE CLASSIFICATION: NFPA 701 TM#1 (small scale), California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

S74 Twine/Flagstone

COMPOSITION: 26% Polyester, 67% Vinyl on Polyester, 7% Olefin
MESH WEIGHT: 13.2 oz/yd² (448 g/m²)
FABRIC THICKNESS: 0.042 in. (1.07 mm)
OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

S75 Twine/Metal

COMPOSITION: 26% Polyester, 67% Vinyl on Polyester, 7% Olefin
MESH WEIGHT: 13.2 oz/yd² (447 g/m²)
FABRIC THICKNESS: 0.042 in. (1.07 mm)

OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

S76 Twine/Oatmeal

COMPOSITION: 26% Polyester, 67% Vinyl on Polyester, 7% Olefin
MESH WEIGHT: 13.1 oz/yd² (443 g/m²)
FABRIC THICKNESS: 0.041 in. (1.04 mm)
OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

S77 Contour/Smudge

COMPOSITION: 26% Polyester, 67% Vinyl on Polyester, 7% Olefin
MESH WEIGHT: 13.3 oz/yd² (449 g/m²)
FABRIC THICKNESS: 0.041 in. (1.04 mm)
OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

S78 Contour/Smoke

COMPOSITION: 26% Polyester, 67% Vinyl on Polyester, 7% Olefin
MESH WEIGHT: 13 oz/yd² (440 g/m²)
FABRIC THICKNESS: 0.041 in. (1.04 mm)
OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

S79 Contour/Natural

COMPOSITION: 26% Polyester, 67% Vinyl on Polyester, 7% Olefin
MESH WEIGHT: 13 oz/yd² (441 g/m²)
FABRIC THICKNESS: 0.039 in. (0.99 mm)
OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

S80 Contour/Essence

COMPOSITION: 27% Polyester, 67% Vinyl on Polyester, 6% Olefin
MESH WEIGHT: 14.9 oz/yd² (505 g/m²)
FABRIC THICKNESS: 0.045 in. (1.14 mm)
OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

S81 Pavestone

COMPOSITION: 26% Polyester, 67% Vinyl on Polyester, 7% Olefin
MESH WEIGHT: 12.9 oz/yd²

(436 g/m²)
FABRIC THICKNESS: 0.035 in. (0.89 mm)

OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%

FIRE CLASSIFICATION: California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

S82 Coffee

COMPOSITION: 26% Polyester, 67% Vinyl on Polyester, 7% Olefin
MESH WEIGHT: 12.7 oz/yd² (432 g/m²)
FABRIC THICKNESS: 0.037 in. (0.94 mm)
OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

S83 Aura/Sable

COMPOSITION: 43% Polyester, 57% Vinyl on Polyester
MESH WEIGHT: 15.3 oz/yd² (518 g/m²)
FABRIC THICKNESS: 0.038 in. (0.97 mm)
OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

S84 Aura/Poetry

COMPOSITION: 43% Polyester, 57% Vinyl on Polyester
MESH WEIGHT: 16.1 oz/yd² (545 g/m²)
FABRIC THICKNESS: 0.040 in. (1.02 mm)
OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

S90 Desert

COMPOSITION: 28% Polyester, 72% Vinyl on Polyester
MESH WEIGHT: 14.7 oz/yd² (497 g/m²)
FABRIC THICKNESS: 0.033 in. (0.84 mm)
OPENNESS FACTOR: Approx. 5%
UV BLOCKAGE: Approx. 95%
FIRE CLASSIFICATION: NFPA 701 TM#1 (small scale), California Technical Bulletin 117, NFPA 101 (Class A Rating), and IBC Section 803.1.1 (Class A Rating)

PHIFER
INCORPORATED

P. O. Box 1700 • Tuscaloosa, Alabama 35403-1700 USA
Phone: 205.345.2120 • FAX: 205.391.0799
Toll Free USA/Canada: 1.800.221.5497
phifer.com • ISO Registered



© SheerWeave is a registered trademark of PHIFER INCORPORATED.
© MICROBAN is a registered trademark of Microban Products Company.
™ UL, the UL logos and the UL mark are trademarks of UL LLC.
Photo courtesy of HUNTER DOUGLAS, South America.
© PHIFER INCORPORATED Custom Collection V18 101718 3037459