

INCLINE BELTING


Most common applications include package handling by food processors, distribution centers, airline terminals, breweries, bottling plants and other industrials. Some types are ideally suited for use on corrugated box machines, packaging machines and even some bakery machines.

See "Food Belting" and "Ranger® PVC" for additional textured surface belts.




Name & Style Number	Plies	Cover Compound	Tension Rating Lbs. P.I.W.	Nominal Thickness			Min. Pulley Dia.	Nominal Weight Lbs. P.I.W./Ft.	Slab Width	Recommended Lacing	
				Cover	Bottom	Overall				Alligator	Clipper
Grip-Star (Rough Top)											
†GS150R	2	Black Rubber	150	3/16"	Bare	9/32"	3"	.094	72"	† 7	†1A
†GS283R	3	Black SBR	105	3/16"	F.S.	5/16"	2½"	.118	72"	†20	†2
†GS233BN	3	Brown Neop.	52	3/16"	F.S.	9/32"	2"	.108	60"	† 7	†1
†GS453PG	3	Tan Pure Gum	135	3/16"	F.S.	9/32"	2"	.086	60"	† 7	†1A
†GS453RCN	3	Red Carb. Nitrile	135	3/16"	F.S.	9/32"	2"	.094	60"	†15	†1
†GS203BCN	3	Blue Carb. Nitrile	105	3/16"	F.S.	5/16"	2½"	.116	60"	†15	†2
†GS453U	3	Tan Ureth.	135	3/16"	F.S.	9/32"	3"	.106	60"	† 7	†1
Diamond Top (Non Marking) †DT120T	2	Tan SBR	120	3/32"	F.S.	9/32"	4"	.093	60"	20	2
Steepgrade †SG203R	3	Black SBR	105	3/16"	F.S.	5/16"	2½"	.104	60"	†15	†2
Ridge Star (V-Top) †RS283R	3	Black SBR	105	3/16"	F.S.	11/32"	2½"	.108	60"	†20	†2
Wedge-Grip †WG120R	2	Black Rubber	120	3/16"	F.S.	9/32"	4"	.087	60"	†20	†2


†—Remove top cover to lace. Temperature range 0° F - 230° F.

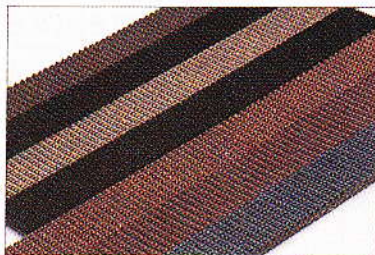

Grip Star up to 35° Incline

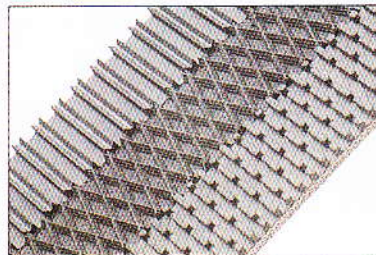

Wedge-Grip/Steep Grade Ridge Star up to 45° Incline

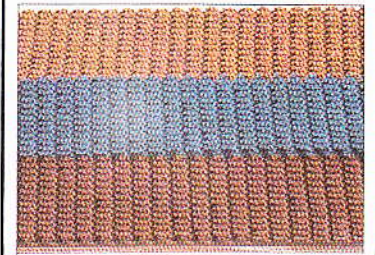

Blue, Tan & Red Grip Star in Corrugated Box Plants