



MODEL HR 10 ROTAVATOR[®]

Tillage Widths of 50" & 60"
... for Tractors from 25 H.P. to 50 H.P.


The HR 10 is a truly versatile tiller designed for small farms; fruit, vegetable and other specialized crops; plus nursery and landscaping operations. Since it does the work of a plow, disc and harrow in a single pass, it reduces compaction while improving soil structure. Efficient and dependable, the HR 10 helps conserve your soil while saving on tillage costs.



MODEL HR 10 ROTAVATOR®

A MID-SIZED ROTAVATOR WITH A BIG ENGINEERING TRADITION

Over 50 years of engineering excellence have made Howard the world leader in rotary tillage. The HR 10 ROTAVATOR is heir to this long tradition.

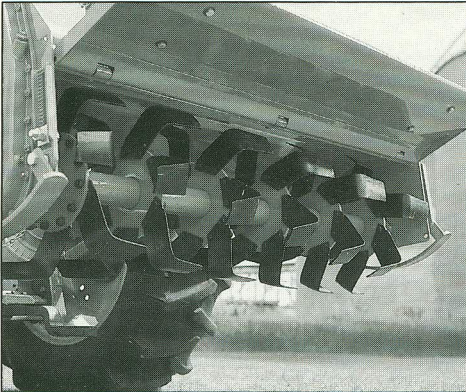

Like its cousins in Howard's extensive tillage line, it offers features and durability you would expect only in a larger tiller.

HANDLES TOUGH PRIMARY TILLAGE JOBS

A heavy-duty rotor and rugged Howard blades make the Model HR 10 an efficient performer even in compacted soils.

In the fall, a single pass produces a coarse tilth to hold winter moisture and encourage soil "mellowing." Crop residues can be chopped and mixed in at the same time to stop erosion and improve soil structure.


SAVES ON SECONDARY SEEDBED TILLAGE

In the spring, the HR 10 prepares a perfect seedbed in

fewer passes than pull-type tillage tools. The twin skids provide accurate depth control, while the adjustable trailing shield lets you control soil tilth. The rotating blades keep the rich topsoil where it's needed most—on top! They also create a humus-producing blend that promotes faster spring warm-up and earlier germination. You can also incorporate fertilizers and herbicides at an accurate tillage depth.

ADD UP THE FEATURES

The versatile HR 10 can be mounted centrally or offset behind the tractor. This makes it ideal for controlling weeds in busy nurseries, orchards and groves—working close to shrubs, young trees and plants without damage. The clutch-protected drive line also makes it a natural for tough landscaping operations.

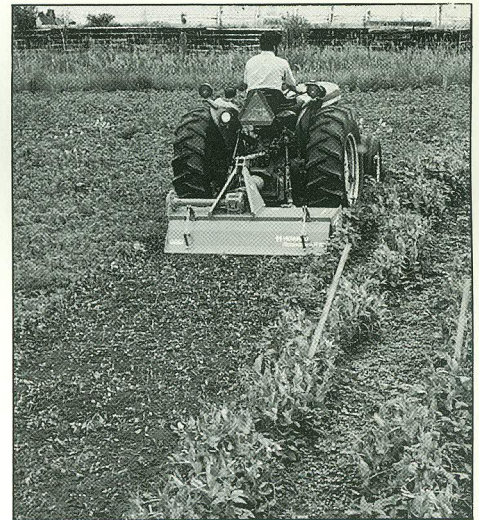

MANY MODELS TO CHOOSE FROM

Howard manufactures a full line of ROTAVATORS for all crops and every tillage need. Choose models from 30 inches to 240 inches wide for 12 H.P. to 250 H.P. tractors. Contact your local Howard dealer or write direct for complete details.

SPECIFICATIONS

Tillage Widths: 50" & 60"

Power Range: For tractors from 25 to 50 H.P. with 540 rpm PTO.

Linkage: Category I & II, 3-point hitch. Optional parking stand available.

Tillage Depth: Adjustable to 7" via twin skids standard or twin front wheels optional.

Rotor Speed: 210 rpm.

Machine Weights: 50" - 572 lbs., 60" - 627 lbs.

DEALER



Howard Rotavator Company, Inc.
A Member of the Howard Group
102 Howard Ave., P.O. Box 7, Muscoda, Wisconsin 53573 (608) 739-3106
Branch in Sacramento, California 95821 (916) 483-2777

HOWARD®
PARAPLOW®
ROTASPIKE®
ROTAVATOR®
SELECTATILTH®
TURF-QUAKER®
are registered trademarks of HOWARD ROTAVATOR COMPANY.

