




Installing a Qbasic Shade

SAFETY DEVICE INCLUDED. SHADE WILL NOT OPERATE CORRECTLY IF THIS DEVICE IS NOT INSTALLED. Begin by mounting shade brackets per the instructions below, either Wall Mounted or Ceiling Mounted. Finish installation by following the instructions specific to shade's model (QB17, QB28, or QB44.) Shade can be re-configured as needed to achieve the desired roll-off. (Shade rolls off back of tube for Standard Roll, or off front of tube for Reverse Roll.)

What You Will Need:

- Pencil
 - Power Drill
 - Level
 - Pliers
- 3/32" (2mm) Drill Bit
 - Screw Driver
 - Measuring Tape
 - (6) #6 (M3.5) Screws¹
 - (6) Wall Anchors²

Wall Mount

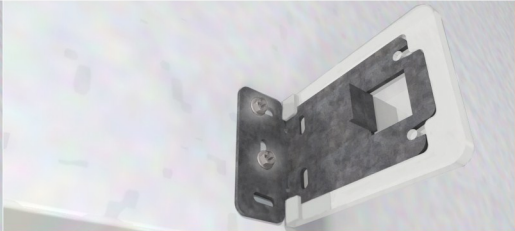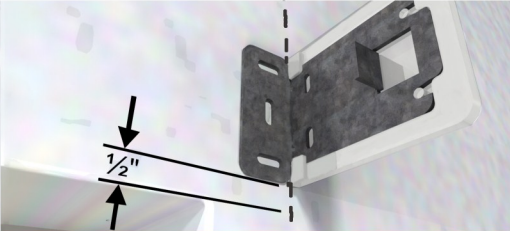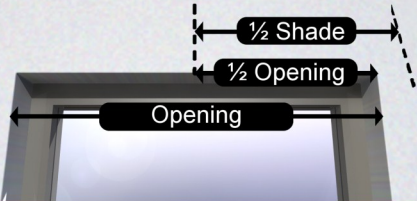


Measure and mark 1/2 of window opening's width. Measure and mark 1/2 of shade's bracket-to-bracket length (see order form) on each side of window.

Align the clutch bracket with your mark 1/2" (13mm) above the window opening. Mark the middle hole. Drill a pilot hole at the bottom of the mark. Repeat on the window's other side with idler bracket.

Use a screw driver or power drill to install the clutch bracket with two screws. Vertically level the bracket. Repeat with idler bracket on the window's other side.

Ceiling Mount

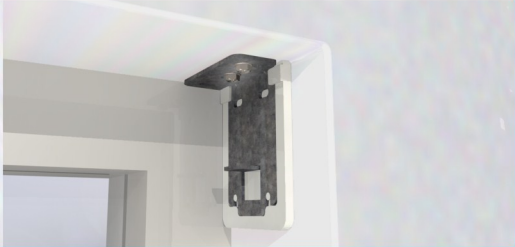


Position the clutch bracket flush against the window jamb and the head jamb. Mark the middle slotted hole. Repeat with the idler bracket on the window's other side.

Use a 3/32" (2mm) drill bit to drill a pilot hole at the front of your marks.

Use a screw driver or power drill to install the clutch bracket with two screws. Repeat with idler bracket on the window's other side.

1 1/2"


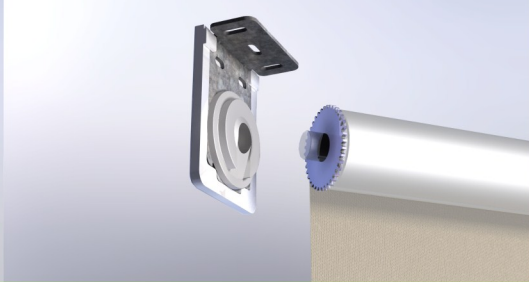


Slide the clutch onto the clutch bracket's metal tab.

Rotate thumb gear on idler end to retract spindle. While holding thumb gear, slide spindle into idler bracket. Release gear.

Install Child Safety device per its included instruction sheet.

Uncrimped Ball Stop



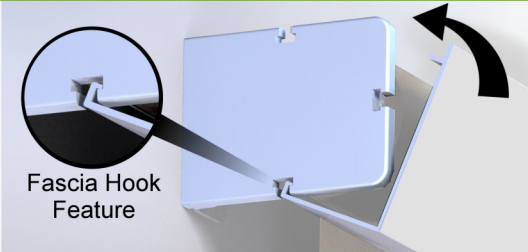
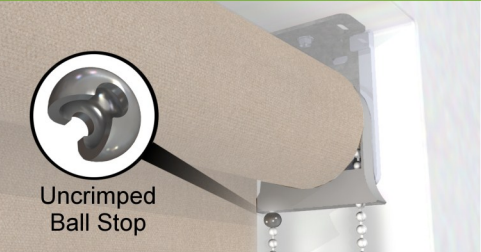


Install ball stops. Move shade to desired top position and crimp a ball stop on top bead. Roll shade to desired bottom position and crimp a ball stop on clutch's opposite side.

If your shade includes a fascia, install it now as shown. If you ordered an independent fascia, follow the instructions included with it.

Test your QBasic shade assembly.


2"

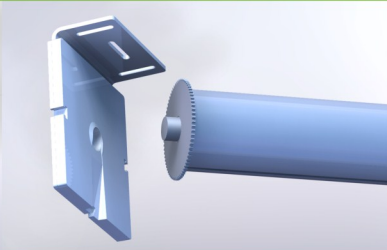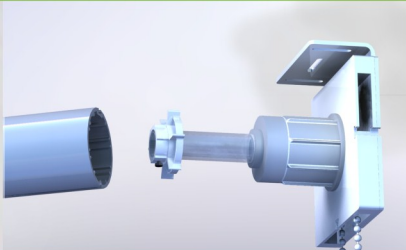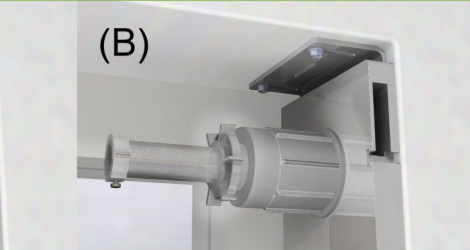

Set the upper limit. For a Standard Roll, move the limiter to the position shown in (A). For a Reverse Roll, move the limiter to the position shown in (B).

Slide the shade tube onto the clutch bracket, ensuring that the tabs on the limiter and hub engage the features inside the tube. Then, at other end of shade, rotate thumb gear to retract spindle. While holding thumb gear, slide spindle into idler bracket. Release gear.

Fascia Hook Feature

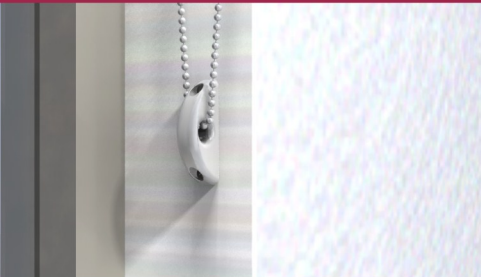

Install Child Safety device per its included instruction sheet.

If your shade includes a fascia, install it now as shown. If you ordered an independent fascia, follow the instructions included with it.


Test your QBasic shade assembly.

¹Use only screws of sufficient length to support assembly weight including accessories. ²Use wall anchors when a screw does not make contact with the wood inside wall.

Qbasic

Chain Driven Manual Shade Installation Instructions

www.qmotionshades.com



Young children can STRANGLE in cord and bead chain loops. They can also wrap cords around their necks and STRANGLE.

- Always keep cords and bead chains out of children's reach.
- Move cribs, playpens, and other furniture away from cords and bead chains. Children can climb furniture to get to cords.
- Attach tension device to wall or floor. This can prevent children from putting cords and bead chains around their necks.

Los niños pequeños corren el riesgo de ESTRANGULARSE en los lazos de las cuerdas y cadenas. También se puede envolver las cuerdas alrededor del cuello y ESTRANGULARSE.

- Mantenga siempre las cuerdas y cadenas fuera del alcance de los niños.
- Mueva las cunas, los carrales y otros muebles lejos de las cuerdas y cadenas. Los niños pueden subirse a los muebles para llegar a las cuerdas.
- Coloque el dispositivo tensor en la pared o en el piso. Ello puede evitar que los niños estiren las cuerdas y cadenas, colocándoselas alrededor del cuello.

Un jeune enfant peut s'ÉTRANGER avec la boucle d'un cordon ou d'un cordon ou d'une chaînette. Il peut aussi enrouler les cordons autour de son cou etc' ÉTRANGER.

- Gardez toujours les cordons et les chaînettes hors de portée des enfants.
- Éloignez les lits et parcs de bébé, ainsi que toute autre pièce de mobilier, des cordons et des chaînettes. Un enfant peut grimper sur un meuble pour atteindre les cordons.
- Fixez au mur ou sur le plancher un dispositif gardant chaînette de le cordon bien tendu. On peut ainsi empêcher l'enfant de saisir le cordon ou la chaînette et de s'enrouler autour du cou.

1 WARNING

1 ADVERTENCIA

1 MISE EN GARDE

Splicing Chains

Match two ends of chain. This can be two ends of the same chain or two ends of different chains of identical style.

Snap each end of chain into the chain splice.


Close the cover on the chain splice.




Changing Chains

QB44 (2")


Remove (4) screws using an appropriately sized phillips screw driver.

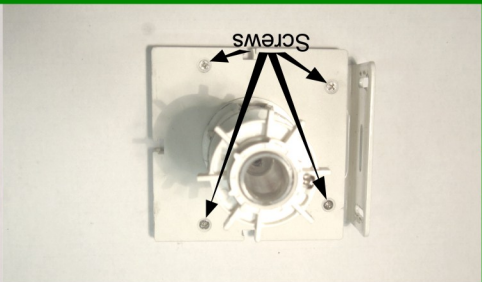

Remove the cover and limiter assembly to expose the sprocket and chain. Remove sprocket cover.

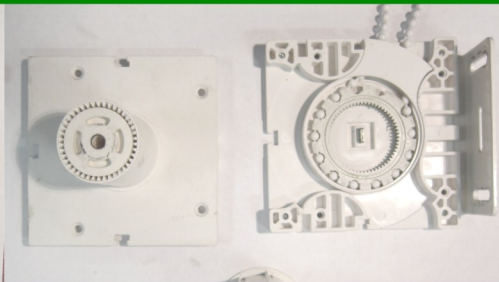


Remove chain from sprocket. Install new chain on sprocket. Reverse previous steps to re-assemble clutch.

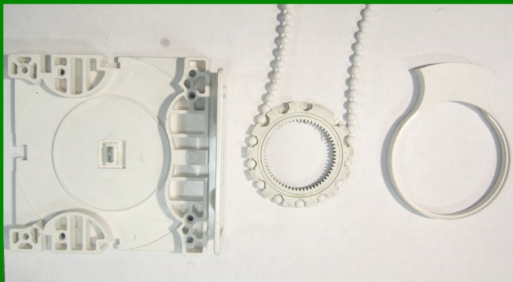


QB28 (1 1/2")

Remove (4) screws using an appropriately sized phillips screw driver.

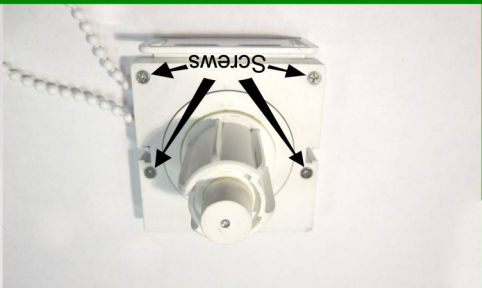

Remove the cover. Pull the sprocket assembly out.

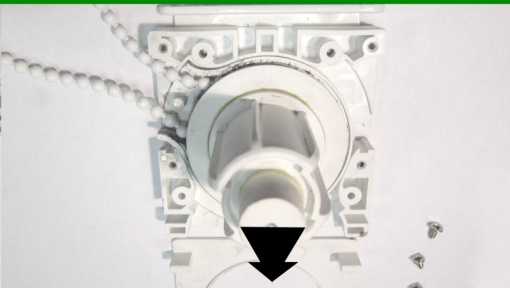

Remove old chain from the sprocket assembly. Install new chain. Reverse the previous steps to reassemble clutch.



QB17 (1 1/2")

Cut the chain and pull it out of the clutch.



Feed one end of new chain into clutch assembly. Use flathead screw driver to rotate the sprocket. The chain will be pulled through the clutch assembly.



Pull the new chain and continue on to "Splicing Chains".

