



AUTOMOTIVE AND LIGHT TRUCK GENERAL SERVICE
100% DESIGNED AND BUILT IN NORTH AMERICA



DUAL SCISSOR

10,000 LB. / 4.5 CAPACITY

COMPACT DESIGN WITH OVERALL WIDTH OF
81" / 2057MM RAISED HEIGHT OF 79" / 2007MM



#TLSS10LP1

FEATURES



▲ Volumetric Control



▲ Retractable Pull Decks 82.7" / 2100mm



▲ Flush or Surface Mounted



DUAL SCISSOR

10,000 LB. / 4.5 CAPACITY

SERVICE
TLSS10LP1

AT TLS OUR GOAL IS TO BUILD LIFTS THAT LAST LONGER, PERFORM BETTER AND COST LESS TO OPERATE

SPECIFICATIONS

Capacity	10,000 lbs. / 4.5T
Overall Length - Surface Mount	160" / 4064mm
Overall Length - Flush Mount	60" / 1524mm
Overall Width	81.9" / 2080mm
Width Between Runways	27" to 40" / 686mm to 1016mm
Deck Width	23.8" / 605mm
Lowered Height	8.3" / 211mm
Raised Height	79.5" / 2019mm
Lifting Time	45 seconds
Power Requirements	230 Volts - 60 Hz - 1 PH - 20amp
Shipping Weight	2,850 lbs. / 1.3T
Part Number	TLSS10LP1

Disclaimer: TLS Inc. is constantly updating their products to maintain the highest possible standards of performance and safety. The specifications included in this brochure are only accurate at the time of printing and are subject to change without notice.

FEATURES


- Compact design - rugged construction - Small foot print takes up less bay space while still allowing best in class weight capacities.
- Versatility and ease of use - Ideal for small compact cars up to light duty trucks with pull out extensions allowing ease of use on short or long wheelbase vehicles.
- Volumetric control stays level all the time - Thanks to single cylinder with dual chamber, unit stays level all the time.
- Lower maintenance - less downtime - No Electronic sensors, No equalization valve, Extra-large pins with accessible grease fittings makes this ideal equipment for high duty cycle shops who require less downtime.
- Built for safety - 21 locking positions ensure side to side stability and eliminates accidental lowering of the lift.
- Unobstructed access - Open front and rear construction with no tire bars or torsion rods allows for unobstructed access to the underside of most vehicles with 27" / 686mm of working area between the superstructures.
- Easy vehicle spotting - The flat deck platform and "spotting blocks" allows quick set-up by the operator increasing bay productivity.
- Low profile approach ramps or flush mount options - The low profile ramp extensions allow for accessibility of smaller compact cars while still allowing for heavier loads. The lift can also be flush mounted for the ultimate in productivity and space saving bay solutions.

OPTIONAL ACCESSORY



Adjustable frame engaging truck adapter #TLSS10LP-TBA4

EQUIPMENT FOOTPRINT

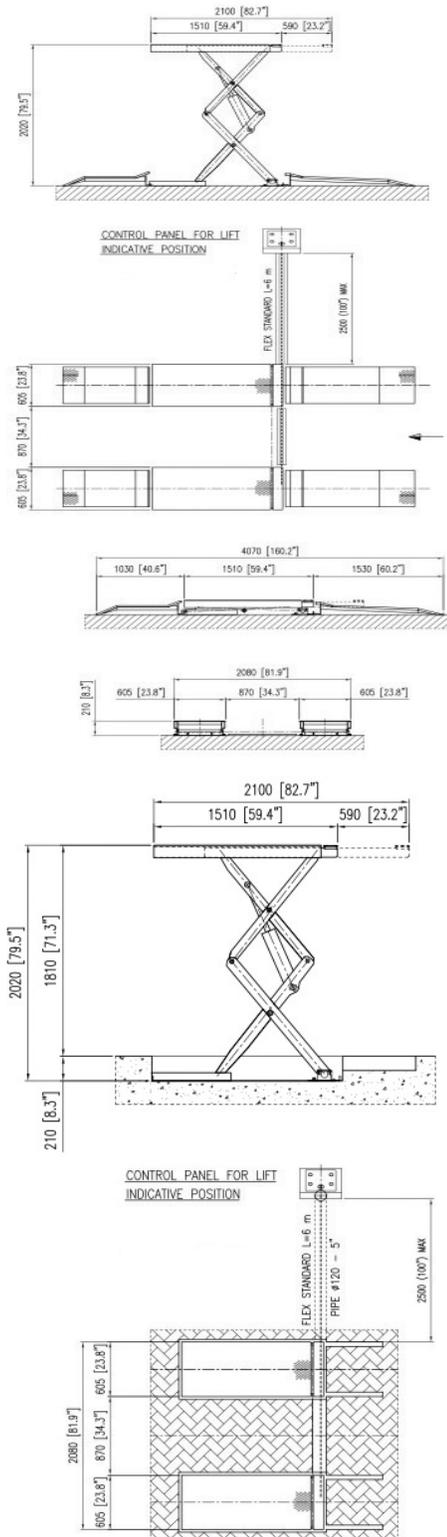

CONTACT US

WWW.TLSLIFTS.COM OR CALL (877) 799-5438

