


>> AM- rental LED screen series



500mm
500mm
Front

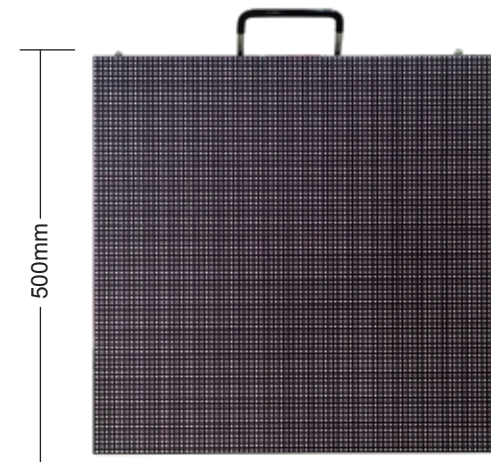

Rear

Features

- Aluminum Die-casting
- Unified size 500mm * 500mm
- Slim design 80mm thickness, 8.2Kg/cabinet
- High refresh rate IC, perfect visual effect
- Passive cooling system, noiseless design
- Delicate and purified color presentation
- Rear fixed stacking and Hoisting Installation

Application:


- Stage backdrop
- TV studio
- Conference Hall & Exhibition Hall information publishing
- Gymnasium & Studium broadcasting
- Events rental application etc.



>> AM-fix LED screen series



Front Back

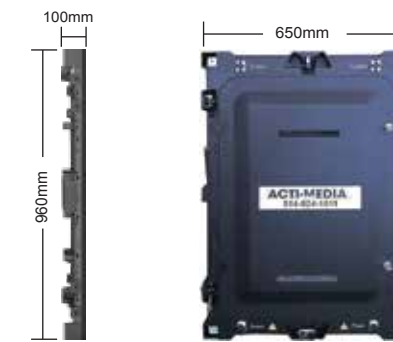

Side Back

Features

- Aluminum Die-casting
- Unified size: 640mm * 960mm
- Slim design: 100mm thickness, 26Kg/cabinet
- New design locks, accurate seamless assembly
- Passive cooling system, noiseless design
- Rear fixed stacking and Hoisting Installation

Application:

- Mobile truck, trailer LED screen
- Conference Hall and Exhibition Hall information publishing
- Events rental application etc.



Specification	P3.91	P4.81	P4.81 Outdoor	P6.25 Outdoor	Unit
Pixel Pitch	3.91	4.81	4.81	6.25	mm
Brightness	≥1400	≥1200	5500	6000	nit
Cabinet size	500*500*80	500*500*80	500*500*80	500*500*80	mm
Cabinet material	Die cast aluminum	Die cast aluminum	Die cast aluminum	Die cast aluminum	Aluminum Die-casting
Cabinet weight	7.5	7.5	7.5	7.5	kg
Service type	back	back	back	back	-
LED type	SMD2121	SMD2121	SMD2727	SMD 3535	-
Cabinet resolution	123904	123904	123904	123904	pixels
Refresh rate	≥3840	≥3840	≥3840	≥3840	HZ
Gray level	14	14	14	14	bit
Viewing angle	140H/140V	140H/140V	140H/140V	140H/140V	deg
IP grade	IP31	IP31	IP65	IP65	-
Max/Aver. power consumption	700/315	700/315	700/315	700/315	w/sqm

Specification	P6.66	P8	P10	Unit
Pixel pitch	6.66	8	10	mm
Brightness	7200	7000	6500	nit
Cabinet size	640*960*100	640*960*100	640*960*100	mm
Cabinet material	Die cast aluminum	Die cast aluminum	Die cast aluminum	Aluminum Die-casting
Cabinet weight	26	26	26	kg
Service type	back	back	back	-
LED type	SMD3535	SMD3535	SMD 3535	-
Cabinet resolution	12740	9600	6144	pixels
Refresh rate	1920	1920	1920	HZ
Gray level	14	14	14	bit
Viewing angle	140H/140V	140H/140V	140H/140V	deg
IP grade	IP65	IP65	IP65	-
Max/Aver. power consumption	830/330	830/330	830/330	w/sqm