

Cooper/Lumark fixture Before Specifications

- Wattage - 28W/36W
- Weight - 4.4 lbs
- Input Total Power - 34W/40W
- Lumens - 3282/4220 @4500k
- Luminated Area - 20ft: 85ft x 85ft ;24ft : 118ft x 118ft ; 30ft : 138ft x 138ft
- Illuminance Uniformity - >0.6
- Input Voltage - 110/115-220/277
- Input Voltage - ≥90%
- Current - Single 325 mA
- Meanwell Drivers - HLG-40H/HLG-60H
- LED Single Power - 1W/1.5W
- Lumen Per Watt - ≥110Lm/W
- Environmental Temperature - 95F~122F
- Lamp Temperature - <122F
- Efficiency - >90%
- CRI - >70
- Power Factor - >0.95
- IP - IP65



Cool-lite Retrofit Kit After Features

- Custom LED retrofit kit for the Cooper/Lumark fixtures.
- Three Kelvin options to choose from: 3000k (warm white), 4000k (white), 5000k (cold white) for allowing the best choice for each application.
- Retrofit kit comes completely assembled for simple snap-in installation.
- 5 year warranty.



Ordering Information

EXAMPLE: LD1-28W-4.5K-<277-T5

Template	Smart Sensor	Wattage	Kelvin	Max Voltage	Lens	Paint Color
LD1	SE (Enlighted Sensor)	28W	3k	277V	T2	01-Gray
	SW (Wattstopper Sensor)	36W	3.5k	480V	T3	02-Brown
	N (No Sensor)		4k		T5	03-White
		4.5k				04-Black
			5k			05-Bronze
						06-Silver
						07-Green
						08-Blue

Contact info:

Website:
www.cool-lite.com

Email address
info@cool-lite.com



Phone number:
+1 831-440-8709

Address:
225 El Pueblo Road
Scotts Valley CA 95066



Photometrics Showing Type-5 Distribution

COOL-LITE 28W

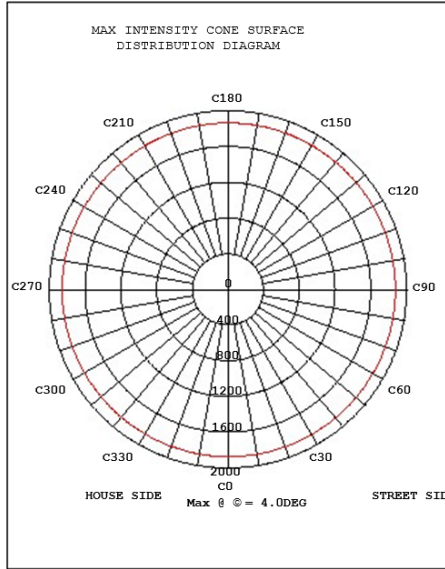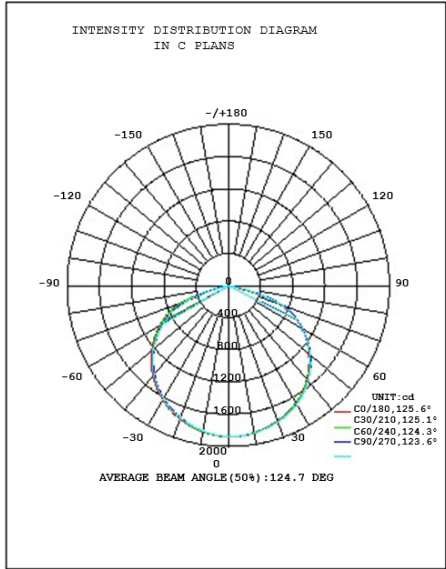

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Test Date: 2014-04-26

© Range: 0 - 90DEG
© Interval: 0.5DEG
Test System: EVERFINE-GO-2000B-V1 SYSTEM V2.0.262
Humidity: 65.0%
Test Distance: 9.970m [K=1.0000]

Contact info:

Website:
www.cool-lite.com

Email address
info@cool-lite.com

Phone number:
+1 831-440-8709

Address:
225 El Pueblo Road
Scotts Valley CA 95066