



Coffee roasting equipment



\_Modello: RM15

# RM15

IMF shop roasters RM15 are ideal for cafes & boutique roasteries, especially where space is limited & the emissions are required to be treated. These roasters use a specially designed combustion chamber that simultaneously heats the roaster & treats the emissions. This technology saves at least 30 per cent in gas consumption compared to traditional machines with separate afterburner.

“VORTEX” system mixes ambient air into the hot airstream before it enters the roaster via an electronically operated modulating valve, so the air is already at the correct temperature before entering the drum, giving consistently uniform temperature of the hot airstream through the entire roasting process.

“EQUALIZER” ensures the same volume of air enters into the roaster. This feature delivers equal volumes of hot air both inside and surrounding the perforated alloy drum surface, giving even heat distribution across the entire surface of the coffee beans, and eliminating any temperature fluctuations inside the drum.


Basic manual model also available.

Made in Italy

IMF srl - INDUSTRIA MACCHINE FERRARESE - Via Scienza 6 - 45030 Occhiobello (RO) - Italy  
Tel. +39 0425 760109 - Fax +39 0425 761126 - info@imf-srl.com - www.imf-srl.com



Coffee roasting equipment

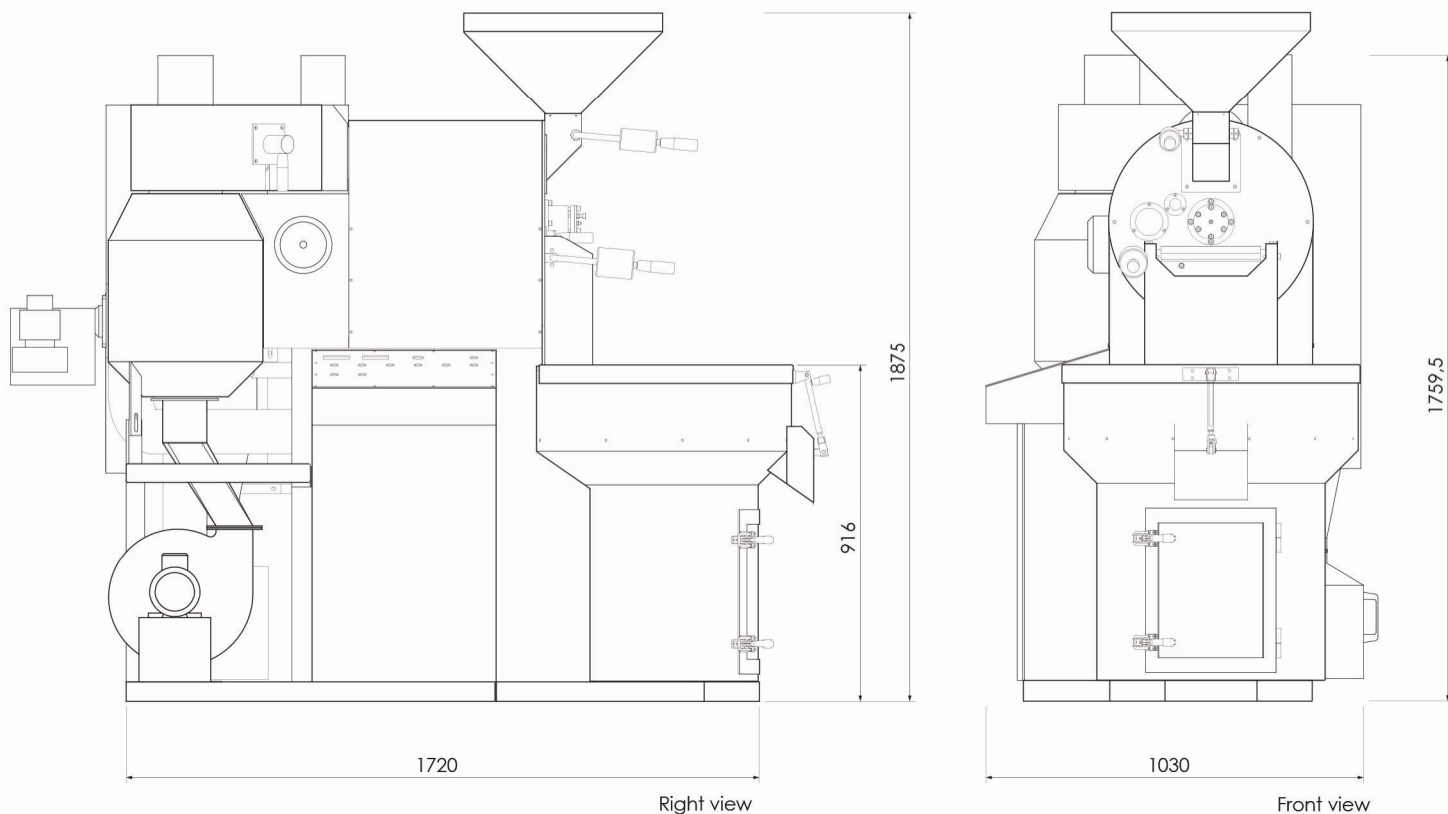

## SHOP ROASTERS RM 15

MODEL	Kg/CYCLE	OUTPUT (Kg/h)	T. CYCLE (min)	POWER (kW)	FUEL	Ø PIPING (mm)
RM 15	15	45	12/18	70	natural gas/LPG	150

The given data are to be considered approximate

### IMF ROASTING TECHNOLOGY

Indirect flame	Forced hot air	Perforated drum	Recycling air system	Integrated afterburner	Energetic efficiency	Low emissions
----------------	----------------	-----------------	----------------------	------------------------	----------------------	---------------

### OPTIONALS

Full automatic  
control PLC

Up to 100  
roasting profiles