

**STRONG & RELIABLE**

# **RAM**®

***“The Best Overall Value In The Industry”***



**HELPING MAKE  
TRAILERING  
FOR WORK AND  
RECREATION  
EASIER & SAFER.**

**PRODUCT CATALOG**



Pacific Rim International, LLC markets products manufactured by our family business in Ningbo, China.

We are a manufacturer that specializes in a large variety of high precision shafts, gears, auto parts as well as trailer jacks and couplers. Starting in 1992 we have now grown into a mid-size manufacturer. The majority of our products are sold in the US, Europe and multinational corporations within China.

The factory is ISO 9001: 2008 certified.

We offer one line of value priced - high quality products and brand it as such.

We bring these products direct from the factory and combine it with a fully insured United States corporation - Pacific Rim International, LLC. This allows our customers access to low cost manufacturing and is backed by a US company.

We stock product at four US warehouse locations. We also can deliver mixed products in container loads direct to a customer's location.

### **Pacific Rim International, LLC**

5640 NW 135th Avenue | Portland, OR 97229

Ph: 503-614-0587 Fax: 503-645-7083

Email: [contact@pacific-r.com](mailto:contact@pacific-r.com)

### **Warehouse LOCATIONS:**

#### **Oregon**

2720 NW 35th Ave  
Portland, OR 97210

#### **Indiana**

3300 Reedy Dr.  
Elkhart, IN 46514

#### **Georgia**

500 Great SW Pkwy  
Atlanta, GA 30336

#### **Texas**

11430 Ferrell Dr.  
Dallas, TX 75234



# STABILIZER JACKS



**NEW!**

Scissor stabilizer jack is ideal for travel and 5th wheel trailers

- 5000lb capacity per set (2500lb capacity each jack)
- Adjustable from 4" to 24" vertical height
- Bearing set on crank side for longer jack life
- Eight slotted holes on top jack plate for mounting adjustability
- Black painted finish
- Handle sold separately

Flip down stabilizer jack is ideal for all types of RV, utility and cargo trailers

- 650lb lift and 1000lb support capacity per jack
- Adjustable from 11-1/2" to 17-3/4" vertical height
- Handle included with every two stabilizer jacks
- Black painted finish

## RV LANDING GEAR

You will find RAM® landing gear on several 5th wheel RV brands today.

- Durable construction – to last for years
- Black painted outer tube with durable zinc finish inner tube
- Power motor option and wire harness available – to make lifting easy
- Spring foot plunger pin option also available – to make it faster to engage the dropleg

SYSTEM CAPACITY			
RVLG-8000 and RVLG-8000T		SYSTEM LBS.	PER LEG LBS.
SUPPORT CAPACITY		16,000	8,000
LIFT CAPACITY MANUAL CRANK		8,000	4,000
LIFT CAPACITY SINGLE POWER KIT (OPT.)		5,000	2,500
LIFT CAPACITY DUAL POWER KITS (OPT.)		8,000	4,000
SYSTEM DEMENSION			
	A	B	C
RVLG-8000	33.5"	29.5"	17.5"
RVLG-8000T	40.5"	36.5"	17.5"

PERFORMANCE DATA	
TRAVEL	20"
DROP LEG ADJUSTMENT	16"
MANUAL CRANK TORQUE	150 IN *LBS.
MEASURED SINGLE POWER KIT AMPS @ RATED LOAD	25A
SPEED @RATED LOAD	4.0"/MIN.



Cross Shafts



Companion Jack

Drive Leg Jack



RVLG-SPP  
Spring Foot Plunger Pin




RVLG-HDL  
Manual Handle



RVLG-RDBOX  
3:1 Reduction Gear Box



M1230  
12V, 30A DC Motor



RVLG-DFT  
Durable Zinc Foot Pad



RVLG-HNS  
Wiring Harness






# MARINE SWIVEL JACKS

**Ideal for use with boat, sport craft, snowmobile and other recreational trailers.**

- Swivel jacks are available in 1,000lb, 1,200lb and 1,500lb capacities and all include a large 1/2" pull pin to activate the swivel mechanism
- Large comfort handle included on all models
- 1,200lb and 1,500lb models include a four bolt pin through design on mounting plate for superior side load support
- 1,000lb models include a deep seated snap ring for side load support
- Durable clear zinc finish
- All bolt on models come with all mounting hardware and fits up to a 3"x5" trailer frame
- All weld on models come with weldable bracket

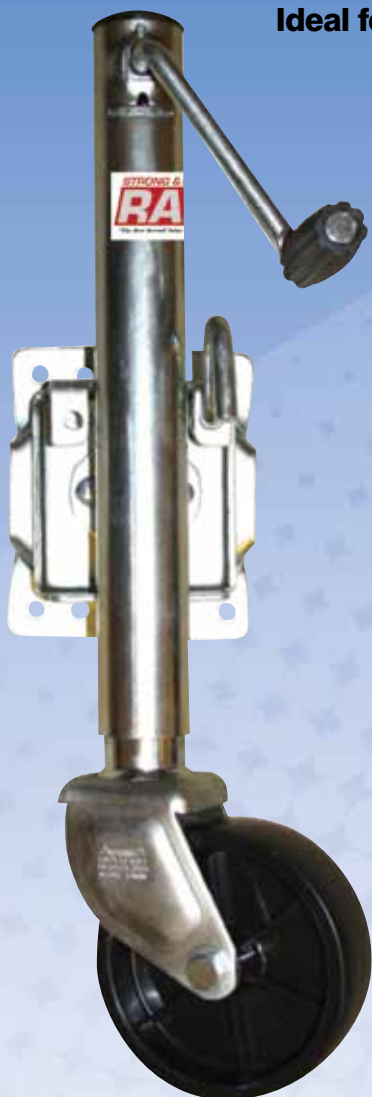

**MJ-1200B**



**MJSQ-2500B**



**MJ-1001B**



**MJ-1500B**



**MJ-1200BBX**

Product Code	Support and Lift Capacity	Travel Distance	Bracket Height	Retracted Height	Bracket Type	Caster Size	Unit Weight (lbs)
MJ-1001B	1,000	10"	12.7"	23.25"	Bolt on	6"	14.5
MJ-1001BBX (Retail Boxed)	1,000	10"	12.7"	23.25"	Bolt on	6"	15.5
MJ-1000W	1,000	10"	12.7"	23.25"	Weld on	6"	13.1
MJ-1200B	1,200	10"	12.7"	23.25"	Bolt on	6"	15.1
MJ-1200BBX (Retail Boxed)	1,200	10"	12.7"	23.25"	Bolt on	6"	16.1
MJ-1500B	1,500	10"	12.7"	25.25"	Bolt on	8"	17.5
MJ-1500W	1,500	10"	12.7"	25.25"	Weld on	8"	16.7
MJ-1500B-DWL	1,500	10"	12.5"	25.25"	Bolt on	Dual 6"	18.7
MJ-1500BBX-DWL(Retail Boxed)	1,500	10"	12.5"	25.25"	Bolt on	Dual 6"	20
MJSQ-2500B	2,500	28"	7"	25.25"	Fixed Mount	Foot	24.2

# MARINE WINCHES

STRONG & RELIABLE  
**RAM**

Ideal for marine, utility, recreational and other applications.

- Models with strap feature a 50mm x 23' black webbed strap with a yellow zinc forged safety latched hook
- Solid one piece gears for greater durability
- Thumb latch to lock winch in a desired location
- Handles include a large 3.5" comfort grip
- All models come boxed with a full overlay label
- Durable zinc finish

**NEW!**




HWSP-1400

Product Code	Capacity (lbs)	Description	Gear Ratio	Maximum Cable Length (Not Incl.)	Unit Weight (lbs)
HWSP-600	600	Hand winch includes 23' strap and 7" handle	3.1:1	4.2mm x 33'	4.4
HW-600	600	Hand winch includes 7" handle	3.1:1	4.2mm x 33'	4.4
HWSP-1000	1,000	Hand winch includes 23' strap and 8" handle	4.1:1	4.5mm x 33'	6.49
HW-1000	1,000	Hand winch includes 8" handle	4.1:1	4.5mm x 33'	6.01
HWSP-1400	1,400	Hand winch includes 23' strap and 10.5" handle	4.1:1	4.8mm x 33'	8.1
HW-1400	1,400	Hand winch includes 10.5" handle	4.1:1	4.8mm x 33'	7.59
HWSP-1600	1,600	Hand winch includes 23' strap and 10.5" handle	4.1:1	5.0mm x 33'	8.14
HW-1600	1,600	Hand winch includes 10.5" handle	4.1:1	5.0mm x 33'	7.63

# BRAKE WINCHES

Ideal for all types of marine, ag, industrial and commercial applications where mechanized lifting is needed

- Brake mechanism activates when operator releases handle
- Poly handle grip that is comfortable to the touch
- Both single speed models come standard with premium clear zinc finish

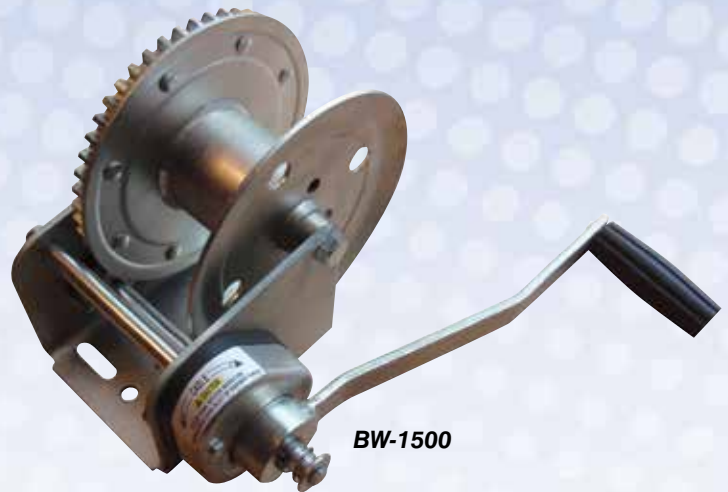

BW-1500

Product Code	Capacity (lbs)	Gear Ratio	Hub Diameter	Handle Length	Reel Capacity Using 1/4" Cable	Unit Wt. (lbs)
BW-1000	1,000	4.1:1	2.25"	11"	55'	9.1
BW-1500	1,500	5.1:1	2.5"	11"	90'	12.25



# ELECTRIC A-FRAME JACKS

For use with trailers with A-frame couplers.

**IDEAL FOR  
CARGO & TRAVEL  
TRAILERS**

- Easy to operate with just a flip of the switch
- Durable exterior grade black powder coat finish on outer tube
- Zinc finish inner tube with removable sand foot
- 18" travel height
- LED light for easy night time hookup
- EJ-3508 models include a drop leg for 4-3/4" of additional adjustment and also features a bubble level on top of jack for easy trailer leveling
- Durable hardened steel gears for years and years of normal use
- Crank handle for manual override in case of power loss
- Setup for 12 volt battery use



EJ-3501-B



EJ-3508-WBX

Product Code	Capacity (lbs)	Description	Unit Weight (lbs)
EJ-3501-BBX (Retail Boxed)	3,500	Electric A-Frame Jack (Black Finish - boxed)	19.8
EJ-3508-WBX (Retail Boxed)	3,500	Electric A-Frame Jack (White Finish - boxed)	25
EJ-3508-BBX (Retail Boxed)	3,500	Electric A-Frame Jack (Black Finish - boxed)	25



# A-FRAME JACKS



For use with trailers with A-frame couplers.

- Durable exterior grade black powder coat finish or durable clear zinc plated finish
- Topwind models with large black handle use a bolt head fastener. This is to ensure the handle does not pop off during operation of jack
- Handle arm has durable zinc finish for a nice look
- Some topwind models are available with a comfortable red claw knob on a clear zinc solid bar handle that can be folded away when not in use
- Sidewind jacks have an interior gear box for a nice sleek look
- TJA-2002-B, TJA-5000T-B and TJA-5000T-Z are taller travel models that also include a thicker inner tube for greater side load capacities



TJA-2000-B

TJA-2006-B

TJA-5000B

TJA-5000T-B

TJA-2000S

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Bracket Height	Retracted Height	Description	Unit Weight (lbs)
TJA-2000-B	3,000	2,000	Topwind	14"	8"	20"	Exterior grade black powder coat finish	9.05
TJA-2003-B	3,000	2,000	Topwind	14"	8"	20"	Exterior grade black powder coat finish with solid bar handle and red claw grip	9.05
TJA-2000-Z	3,000	2,000	Topwind	14"	8"	20"	Durable clear zinc finish	9.05
TJA-2001-B	3,000	2,000	Topwind	14"	5"	20"	Exterior grade black powder coat finish	9.05
TJA-2002-B	3,000	2,000	Topwind	15"	9"	23"	Exterior grade black powder coat finish	10.6
TJA-2006-B	3,000	2,000	Topwind	14"	8"	20"	Exterior grade black powder coat finish	9.05
TJA-5000-B	5,000	5,000	Topwind	14"	10.5"	20"	Exterior grade black powder coat finish	9.63
TJA-5000T-B	5,000	5,000	Topwind	15"	10.5"	22"	Exterior grade black powder coat finish with solid bar handle and red claw grip	10.5
TJA-5000T-Z	5,000	5,000	Topwind	15"	10.5"	22"	Durable clear zinc finish with solid bar handle and red claw grip	10.5
TJA-2000S	3,000	2,000	Sidewind	14.5"	9"	25"	Exterior grade black powder coat finish	11.0
TJA-5000S-B	5,000	5,000	Sidewind	14.5"	9"	25"	Exterior grade black powder coat finish	12.0



# A-FRAME JACK ACCESSORIES



JF-101



JF-99



JF-100



Support Plate JSP-100

**USING A SUPPORT  
PLATE GREATLY INCREASES  
SIDE LOAD SUPPORT**



JC-101



JC-102

Product Code	Product Type	Lift Capacity (lbs)	Description	Unit Weight (lbs)
JC-101	Poly Caster Wheel	1,200	Caster assembly with 2"x6" poly wheel, fits 2" jack tube	3.31
JC-102	Steel Caster Wheel	1,200	Caster assembly with 2"x6" steel wheel, fits 2" jack	4.2
JF-100-B	Black Jack Foot	2,000	Jack foot with hardware, fits 2" tube, 1.7" tall, black powder coat finish	1.78
JF-100-Z	Zinc Jack Foot	2,000	Jack foot with hardware, fits 2" tube, 1.7" tall, clear zinc finish	1.78
JF-101	Zinc Jack Foot	2,000	Jack foot with hardware, fits 2" tube, 8.5" tall, clear zinc finish	3.31
JF-99	Zinc Jack Foot	2,000	Jack foot with hardware, fits all a-frame jacks, clear zinc finish	0.67
JSP-100	Support Plate	N/A	Bottom support plate with 2.29" hole for 2K and 5K A-frame jacks, raw with light oil finish	0.69



# WELD ON BRACKET SWIVEL JACKS



Ideal for use with ag, industrial, commercial, recreational and many other types of trailers.



TJB-2002S-B

TJB-2001-B

- Available with a durable black powder coat outer tube and with a durable zinc finish inner tube or with a durable clear zinc finish outer and inner tubes
- Top wind models come standard with a comfortable red claw knob on a clear zinc solid bar handle that can be folded away when not in use
- Deep seated snap ring for side load support and also include a raw weld on bracket
- Large 1/2" pull pin to activate the swivel mechanism
- Grease zerk for easy greasing of jack
- Welded on 3-3/4" x 7-1/2" durable zinc finish sand foot

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Bracket Height	Retracted Height	Description	Unit Weight (lbs)
TJB-2001-B	3,000	2,000	Topwind	10"	11.25"	15.25"	Black powder coat outer tube, clear zinc inner tube	12.1
TJB-2001-Z	3,000	2,000	Topwind	10"	11.25"	15.25"	Clear zinc outer and inner tube	12.1
TJB-2001S-B	3,000	2,000	Sidewind	10"	11.25"	17.5"	Black powder coat outer tube, clear zinc inner tube	13.9
TJB-2002-B	3,000	2,000	Topwind	15"	15"	20.25"	Black powder coat outer tube, clear zinc inner tube	14.5
TJB-2002S-B	3,000	2,000	Sidewind	15"	15"	22.5"	Black powder coat outer tube, clear zinc inner tube	16.3



# PIPE MOUNT SWIVEL JACKS

**Ideal for use with ag, industrial, commercial, recreational and many other types of trailers.**

- Available with a durable black powder coat outer tube and with a durable zinc finish inner tube or with a durable clear zinc finish outer and inner tubes
- Top wind models come standard with a comfortable red claw knob on a clear zinc solid bar handle that can be folded away when not in use
- Includes a pin and lanyard assembly as well as a 2" raw male mating pipe (TJP-7001 models include a heavy duty 3" female mating pipe)
- Grease zerk for easy greasing of jack
- 3,000 lb. and 5,000 lb. models come standard with a welded on 3-3/4" x 7-1/2" durable zinc finish sand foot
- 8,000 lb. models come standard with a welded on 6" x 8" durable zinc finish sand foot



TJP-7001S-Z



TJP-5002S-B



TJP-5002-B

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Bracket Height	Retracted Height	Description	Unit Weight (lbs)
TJP-2001-B	3,000	2,000	Topwind	10"	11.25"	15.25"	9/16" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	11.7
TJP-2001S-B	3,000	2,000	Sidewind	10"	11.25"	17.5"	9/16" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	13.5
TJP-2002-B	3,000	2,000	Topwind	15"	15"	20.25"	9/16" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	13.9
TJP-2002S-B	3,000	2,000	Sidewind	15"	16.25"	23.25"	9/16" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	15.7
TJP-5001-B	5,000	3,000	Topwind	10"	11.25"	15.25"	9/16" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	12.0
TJP-5002-B	5,000	3,000	Topwind	15"	15"	20.25"	9/16" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	14.5
TJP-5001S-B	5,000	3,000	Sidewind	10"	11.25"	17.5"	5/8" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	13.8
TJP-5001S-Z	5,000	3,000	Sidewind	10"	11.25"	17.5"	5/8" pull pin lanyard, bracket mount, clear zinc inner and outer tubes	13.8
TJP-5002S-B	5,000	3,000	Sidewind	15"	16.25"	23.25"	5/8" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	16.8
TJP-7001-B	8,000	7,000	Topwind	10"	11.5"	18.5"	5/8" pull pin lanyard, bracket mount, black powder coat outer tube, clear zinc inner tube	14.2
TJP-7001S-Z	8,000	7,000	Sidewind	10"	11.5"	18.5"	5/8" pull pin lanyard, bracket mount, clear zinc inner and outer tubes	16

# WELD ON SQUARE TUBE JACKS



Ideal for use with ag, industrial, commercial, large utility and many other types of trailers.



TJD-7000S

TJDP-5000S

TJDP-5000S-FLB

- Topwind models come standard with a comfortable red claw knob on a clear zinc solid bar handle that can be folded away when not in use
- All models come standard with a black painted outer tube and a durable zinc finish inner tube
- Both drop leg and fix leg models are available
- 5,000lb models use a 2 1/4" outer tube and include a 3-3/4" x 7-1/2" weld on durable zinc finish sand foot
- 8,000lb models use a 2 1/2" outer tube and come with a large 6" x 8" weld on durable zinc finish sand foot
- 8,000lb sidewind models also include a belly band welded to the bottom of the outer tube for added strength
- All models come standard with a grease zerk for easy greasing of jack

## PIPE MOUNT SWIVEL JACKS

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Bracket Height	Retracted Height	Description	Unit Weight (lbs)
TJDP-5000-FLB	5,000	3,000	Topwind	15"	15.2"	24"	Fixed Leg with base	18.3
TJDP-5000S-FLB	5,000	3,000	Sidewind	15"	15.2"	24"	Fixed Leg with base	19.3
TJDP-7000S-FLB	8,000	7,000	Sidewind	15"	14"	25.5"	Fixed Leg with base	24.3
TJDP-7000S	8,000	7,000	Sidewind	15"	15.2"	25.5"	Drop Leg	28
TJDP-7000	8,000	7,000	Topwind	15"	15.2"	25.5"	Drop Leg	27

## DIRECT WELD JACKS

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Bracket Height	Retracted Height	Description	Unit Weight (lbs)
TJD-5000	5,000	3,000	Topwind	15"	N/A	24.5"	Drop Leg	19.2
TJD-5000S	5,000	3,000	Sidewind	15"	N/A	24.5"	Drop Leg	20.2
TJD-5000S-FLB	5,000	3,000	Sidewind	15"	N/A	24"	Fixed Leg without base	16.65
TJD-7000	8,000	7,000	Topwind	15"	N/A	23.5"	Drop Leg	22.3
TJD-7000S	8,000	7,000	Sidewind	15"	N/A	25.5"	Drop Leg	23.8





# WELD ON SINGLE SPEED SQUARE TUBE JACKS



**Ideal for commercial, construction and other types of trailers where heavy duty lifting is needed.**



**TJD-12000SP-F**



**TJD-12000TW-R**

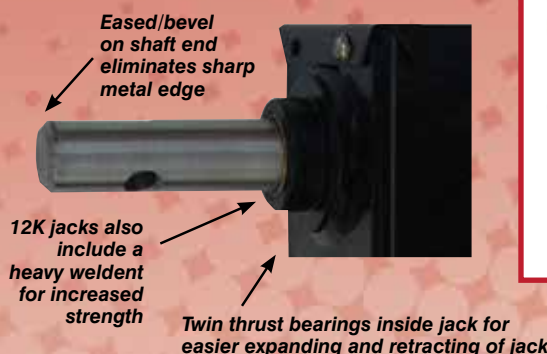

- Models come standard with black painted outer and inner tubes
- Some models are also available with raw finish and greaseless screw for a trailer builder utilizing powder coat application
- 12K models use a heavy 1-1/4" jack screw for a durable 10,000lb lift capacity and is rated as such
- 12K sidewind models include heavy duty cross shaft weldment and brass bushings for durability and superior lift performance
- 12K models are available in spring or non spring return
- 12K sidewind models are available with or without handle, handle mounting hardware and weld on clip
- Grease zerk for easy greasing of jack

## DIRECT WELD NON SPRING RETURN

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Retracted Height	Total Adjust.	Description	Unit Weight (lbs)
TJD-12000TW-R	12,000	10,000	Topwind	12.5"	23.5"	25.5"	Pin to side, handle, mounting hardware and clip included	54
TJD-12000-F	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to front, handle, mounting hardware and clip included	61.6
TJD-12000-FNH	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to front, handle not included	58.1
TJD-12000-R	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to side, handle, mounting hardware and clip included	61.6
TJD-12000-RNH	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to side, handle not included	58.1

## DIRECT WELD SPRING RETURN

TJD-12000TWSP-F	12,000	10,000	Topwind	12.5"	23.5"	25.5"	Pin to front, handle, mounting hardware and clip included	54
TJD-12000SP-F	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to front, handle, mounting hardware and clip included	61.6
TJD-12000SP-FNH	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to front, handle not included	58.1
TJD-12000SP-R	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to side, handle, mounting hardware and clip included	61.6
TJD-12000SP-RNH	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to side, handle not included	58.1

# WELD ON TWO SPEED SQUARE TUBE JACKS



Two speed jacks offer a high and low gear. Low gear is designed to be able to lift heavy loads while still being easy to operate.



TJD2SP-12000SP-F

Eased/bevel on shaft end eliminates sharp metal edge

12K jacks also include a heavy weldment for increased strength

Twin thrust bearings inside jack for easier expanding and retracting of jack

Clip to weld to trailer to secure handle during transit

Handle with bolt and nut to mount to side wind jacks

- Models come standard with black painted outer and inner tubes
- Include heavy duty cross shaft weldment and brass bushings for durability and superior lift performance
- Two speed gear boxes are within the width of the outer tube to eliminate interference issues at the front of the trailer
- Two speed models come standard with handle, handle mounting hardware and weld on clip
- Two speed models include a welded belly band on the bottom of the outer tube for additional strength to perform in those heavy duty applications
- Grease zerk for easy greasing of jack
- 12K model uses a heavy 1-1/4" jack screw for a durable 10,000lb lift capacity and is rated as such
- All two speed jacks use brass bushings for easier cranking and reduces wear for years of use

**WHEN USING A TWO SPEED 12K JACK AND A SINGLE SPEED 12K JACK IN TANDEM ITEM TJD-12000SP-FSL MUST BE USED.**

## DIRECT WELD SPRING RETURN - 12K TWO SPEED

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Retracted Height	Total Adjust.	Description	Unit Weight (lbs)
TJD2SP-12000SP-F	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to front, handle, mounting hardware and clip included	68.6
TJD-12000SP-FSL	12,000	10,000	Sidewind	12.5"	28.5"	25.5"	Pin to front, single speed companion jack when used in tandem, handle not included	58.1



# DUAL PIN SQUARE TUBE JACKS



DLPN-20045SP-F



DLPN2SP-20045SP-F



TJD2SP-25000

- Dual pin system to activate drop leg spring return with ease (DLPN models)
- Heavy duty built in foot bar (DLPN models)
- Heavy duty cross shaft weldment and brass bushings for durability and superior lift
- Two speed gear box is within the width of the outer tube to eliminate interference issues at the front of the trailer
- Two speed model comes standard with handle, handle mounting hardware and weld on clip
- Two speed model includes a welded belly band on the bottom of the outer tube for additional strength to perform those heavy duty applications
- Comes standard with grease zerk for easy greasing of jack

## DUAL PIN 4-1/2" TUBING

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Retracted Height	Total Adjust.	Description	Unit Weight (lbs)
DLPN2SP-250045SP-F	20,000	12,500	Sidewind	12.5"	26.5"	25.5"	Front pedal dual pin, handle, mounting hardware and clip included	75
DLPN-20045SP-FSL	20,000	12,500	Sidewind	12.5"	26.5"	25.5"	Front pedal dual pin, single speed companion jack when used in tandem, handle not included	62

## LANDING GEAR SYSTEM

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Retracted Height	Total Adjust.	Description	Unit Weight (lbs)
TJD2SP-25000	25,000	25,000	Sidewind	12.5"	26.5"	25.5"	Pin to side, handle, mounting hardware and clip included	105
TJD-25000	25,000	25,000	Sidewind	12.5"	26.5"	25.5"	Pin to side, single speed companion jack when used in tandem, handle not included	82
TJD2SPSET-50000	50,000	50,000	Sidewind	12.5"	28.5"	25.5"	Pin to side, two speed and single speed jack set, one handle, mounting hardware and clip included	187



# SEMI TRAILER LANDING GEAR



Ideal for semi/tractor trailers or any large trailers where super duty strength is needed.



STLG-50000



STLG-66000

- Tractor Trailer Manufacturer Association rated (per pair)
- STLG-50000 - 50,000lbs. lifting capacity @ 100 ft. lbs. input torque, 140,000lbs. support capacity and 27,000lbs. sideload capacity
- STLG-66000 - 66,000lbs. lifting capacity @ 100 ft. lbs. input torque, 170,000lbs. support capacity and 29,000lbs. sideload capacity
- Two gear ratios: low speed 34.5 turns per inch, high speed 4.5 turns per inch
- Includes TTMA mount locations for bolting jacks to trailer frame
- Includes heavy duty sand foot
- Belly Band welded to bottom of outer tube for added strength
- Durable black paint finish

## SEMI TRAILER LANDING GEAR

Product Code	Lift Capacity (lbs)	Retracted Height	Extended Height	Description	Unit Weight (lbs)
STLG-50000	50,000 Total (25,000 per leg)	33.7"	52.6"	Includes two speed and single speed jack set, one handle and cross bar, 4.72" jack outside tube	198
STLG-66000	66,000 Total (33,000 per leg)	30.2"	48"	Includes two speed and single speed jack set, one handle and cross bar, 5.3" jack outside tube	209



# STAMPED TRAILER COUPLERS

- Stamped couplers are 100% ball fitted to ensure a proper fit when coupler is hooked up to a hitch ball
- Black finish stamped couplers come standard with a durable black powder coat finish
- Coupler latch designs are setup for easy, yet safe coupling and uncoupling
- Include all SAE required markings and are compliant to standard J684



## STRAIGHT COUPLERS

Product Code	Ball Size	Channel Width	Capacity (lbs)	Finish	Unit Wt. (lbs)
CT-2001-O	1-7/8"	2"	2,000	Raw with light oil	2.9
CT-2001-Z	1-7/8"	2"	2,000	Durable zinc finish	2.9
CT-2002-O	1-7/8"	2-1/2"	2,000	Raw with light oil	3.2
CT-2002-Z	1-7/8"	2-1/2"	2,000	Durable zinc finish	3.2
CT-2003-O	1-7/8"	3"	2,000	Raw with light oil	3.5
CT-2003-Z	1-7/8"	3"	2,000	Durable zinc finish	3.5
CT-3001-O	2"	2"	3,500	Raw with light oil	4.0
CT-3001-Z	2"	2"	3,500	Durable zinc finish	4.0
CT-3002-O	2"	2-1/2"	3,500	Raw with light oil	4.4
CT-3002-Z	2"	2-1/2"	3,500	Durable zinc finish	4.4
CT-3003-O	2"	3"	3,500	Raw with light oil	4.5
CT-3003-Z	2"	3"	3,500	Durable zinc finish	4.5
CT-5003-O	2"	3"	5,000	Raw with light oil	4.6
CT-5003-Z	2"	3"	5,000	Durable zinc finish	4.6

## TOP LATCH A-FRAME COUPLERS

Product Code	Ball Size	Capacity (lbs)	Finish	Unit Wt. (lbs)
CA-5100-O	2"	5,000	Raw with light oil	7.0
CA-5100-B	2"	5,000	Black powder coat	7.0
CA-5200-O	2-5/16"	10,000	Raw with light oil	8.7
CA-5200-B	2-5/16"	10,000	Black powder coat	8.7
CA-5335-B	2-5/16"	13,000	Black powder coat	9.0
CA-5400-O	2-5/16"	14,000	Raw with light oil	9.4
CA-5400-B	2-5/16"	14,000	Black powder coat	9.4

## EXT. YOKE/HELMET A-FRAME COUPLERS

CA-5210-O	2"	8,000	Raw with light oil	7.9
CA-5210-B	2"	8,000	Black powder coat	7.9

# PRECISION CAST TRAILER COUPLERS



**NEW AND  
IMPROVED!**

**Sleeve Lock Couplers Now Feature Solid Shank  
and Re-enforced Sleeve Collar for Even Greater Strength!**

- A-frame sleeve lock couplers are stronger and have more steel content than others in the marketplace.
- The new patent pending 15K and 20K capacity couplers feature a heavy duty cast head with a top lever latch and pin assembly. (Models CA-5280-RB, CA-5280-RZ, CTA-280 and CTA-80PL)
- Black finish couplers come standard with a durable black powder coat finish.
- Include all SAE required markings and are compliant to standard J684



CA-5296-B



**RAM** sleeve lock couplers feature a precision cast coupler head that is distinguished from other manufactures. Its symmetric, straight with two corners and flat top shape allows for a self adjusting coupler head. This makes it easy, yet safe for coupling and uncoupling.

(Models CA-5196-B, CA-5296-B, CTA-196, CTA-296, CA-5196H-B and CA-5296H-B)

**Re-enforced inside  
ring on front portion  
of collar sleeve**



**Solid Shank**

(Shown raw before  
prepared for black  
powder coat finish)



## SLEEVE LOCK A-FRAME COUPLERS

Product Code	Ball Size	Capacity (lbs)	Finish	Unit Wt. (lbs)
CA-5196-B	2"	7,000	Black powder coat finish - Low Profile Latch	14.9
CA-5296-B	2-5/16"	12,500	Black powder coat finish - Low Profile Latch	17.8
CA-5196H-B	2"	7,000	Black powder coat finish - High Profile Latch	14.9
CA-5296H-B	2-5/16"	12,500	Black powder coat finish - High Profile Latch	17.8

## HEAVY DUTY A-FRAME COUPLERS

CA-5280-RB	2-5/16"	15,000	Black powder coat finish	22
CA-5280-RZ	2-5/16"	15,000	Premium zinc finish	22

## FLAT MOUNT COUPLERS

CTA-400PL	2-5/16"	14,000	Stamped coupler, black powder coat with mounting plate	9.8
CTA-80PL	2-5/16"	20,000	Black powder coat finish, heavy duty cast head bolt on coupler (incl. coupler latch safety pin)	14.1



CA-5296H-B



CA-5280-RB



CTA-80PL  
Flat Mount Coupler

*"The Best Overall Value In The Industry"*

**TRAILER PRODUCTS** | 16



# ADJUSTABLE TRAILER COUPLERS



CTA-296



CTA-280



4 Hole  
3-Position  
Channel



6 Hole  
5-Position  
Channel

- 15K capacity adjustable coupler features a heavy duty precision cast head with a very durable top lever latch and pin assembly. (Models CTA-280)
- Adjustable couplers come standard with grade 8 nuts and bolts and are setup for an industry standard 3" wide channel
- Black finish couplers come standard with a durable black powder coat finish
- Sleeve lock adjustable couplers feature a solid shank for greater strength. (CTA-196 and CTA-296)
- Include all SAE required markings and are compliant to standard J684

Product Code	Ball Size	Capacity (lbs)	Description	Unit Wt. (lbs)
CTA-100	2"	8,000	Black powder coat finish, stamped adjustable coupler with grade 8 bolts/nuts	8.2
CTA-100CB6	2"	8,000	Black powder coat finish, stamped adjustable coupler with grade 8 bolts/nuts, 6 hole/5 position channel	15.7
CTA-400	2-5/16"	14,000	Black powder coat finish, stamped adjustable coupler with grade 8 bolts/nuts	8.7
CTA-400CB4	2-5/16"	14,000	Black powder coat finish, stamped adjustable coupler with grade 8 bolts/nuts, 4 hole/3 position channel	14.0
CTA-400CB6	2-5/16"	14,000	Black powder coat finish, stamped adjustable coupler with grade 8 bolts/nuts, 6 hole/5 position channel	16.2
CTA-196	2"	7,000	Black powder coat finish, solid shank, sleeve lock adjustable coupler w/grade 8	11.4
CTA-296	2-5/16"	12,500	Black powder coat finish, solid shank sleeve lock adjustable coupler w/grade 8	12.9
CTA-280CB6	2-5/16"	15,000	Black powder coat finish, heavy duty cast head adjustable coupler with grade 8 bolts/nuts, 15K capacity 1/2" thick 6 hole/5 position channel	25.1
CTA-280	2-5/16"	15,000	Black powder coat finish, heavy duty cast head adjustable coupler with grade 8 bolts/nuts	14.5
CTA-CB4	N/A	14,000	4 hole / 3 position channel, raw with light oil	4.4
CTA-CB6	N/A	14,000	6 hole / 5 position channel, raw with light oil	7.2
CTA-CB126	N/A	15,000	6 hole / 5 position channel, raw with light oil (1/2" plate material)	10.0

# ROUND TUBE GOOSENECK COUPLERS

STRONG & RELIABLE  
**RAM**

**NEW  
LOW PROFILE  
DESIGN!**



GCPN-25008-5H



GCPN-25008



New precision cast head design features **EXCLUSIVE ONE PIECE COUPLER CASTING** with a curved internal ball clamp bar for greater strength and even better fit!



GCPN-30008



GC-24008

- Curved internal ball clamp bar secures coupler to hitch ball. This also allows for easier, yet safe coupling and uncoupling as it does not have a separate bottom plate
- Hidden spring latch mechanism within casting for ease of use and protection of moving parts
- All gooseneck couplers with load bearing pin meet the SAE J2638 standard
- 30K gooseneck couplers include a welded belly band on the bottom of the outer tube for added strength

## ROUND TUBE WITH 2 SET SCREWS

Product Code	Ball Size	Capacity (lbs)	Outer Tube Size	Inner Tube Wall Thickness	Retracted Height	Adj.	Description	Unit Weight (lbs)
GC-20008	2-5/16"	20,000	4.5"	0.215"	30"	8"	Solid one piece cast head with curved internal ball clamp bar	52
GC-24008	2-5/16"	24,000	4.5"	0.24"	30"	8"	Solid one piece cast head with curved internal ball clamp bar	54
GC-30008	2-5/16"	30,000	4.5"	0.30"	30"	8"	Solid one piece cast head with curved internal ball clamp bar	60

## ROUND TUBE WITH LOAD BEARING PIN / 2 SET SCREWS

GCPN-25008	2-5/16"	25,000	4.5"	0.24"	29.2"	8"	Solid one piece cast head with curved internal ball clamp bar	54
GCPN-30008	2-5/16"	30,000	4.5"	0.30"	29.2"	8"	Solid one piece cast head with curved internal ball clamp bar	60
GCPN-25008-5H	2-5/16"	25,000	4.5"	.24"	28.75"	10-3/4"	Solid one piece cast head with curved internal ball clamp bar	54

*"The Best Overall Value In The Industry"*

**TRAILER PRODUCTS** | 18



# SQUARE TUBE GOOSENECK COUPLERS



GCSQTW-30008



GCSQ-25008

- Curved internal ball clamp bar secures coupler to hitch ball. This also allows for easier, yet safe coupling and uncoupling as it does not have a separate bottom plate
- Hidden spring latch mechanism within casting for ease of use and protection of moving parts
- All gooseneck couplers with load bearing pin meet the SAE J2638 standard
- 25K and 30K square tube couplers include a welded belly band on the bottom of the outer tube for added strength

## SQUARE TUBE WITH LOAD BEARING PIN / 1 SET SCREW

Product Code	Ball Size	Capacity (lbs)	Outer Tube Size	Inner Tube Wall Thickness	Retracted Height	Adj.	Description	Unit Weight (lbs)
GCSQ-25008	2-5/16"	25,000	4.5"	0.24"	32"	8"	Solid one piece cast head with curved internal ball clamp bar	64
GCSQ-30008	2-5/16"	30,000	4.5"	0.24"	32"	8"	Solid one piece cast head with curved internal ball clamp bar	64

## SQUARE TUBE WITH TOP WIND CRANK

GCSQTW-30008	2-5/16"	30,000	4.5"	0.275"	32"	7"	Solid one piece cast head with curved internal ball clamp bar	78
--------------	---------	--------	------	--------	-----	----	---	----

## KING PIN GOOSENECK COUPLERS WITH LOAD BEARING PIN

KP5G-R25	N/A	25,000	4.5"	0.24"	26"	8"	Includes round inner and outer tubes with load bearing pin	51
KP5G-R25-IP	N/A	25,000	4.5"	0.24"	N/A	8"	Includes round inner tube only with load bearing pin	36
KP5G-Q25	N/A	25,000	4.5"	0.24"	29"	8"	Includes square inner and outer tubes with load bearing pin	59
KP5G-Q25-IP	N/A	25,000	4.5"	0.24"	N/A	8"	Includes square inner tube only with load bearing pin	42



# FORGED D-RINGS



Product Code	Diameter	Interior Dimensions	Safe Working Load (lbs)	Ultimate Breaking Strength (lbs)	Description	Unit Wt.
DR-12W	1/2"	2-1/2"x2-3/8"	4,080	11,780	Forged from C1045 steel with weld on mounting bracket	.99
DR-12B	1/2"	2-1/2"x2-3/8"	4,080	11,780	Forged from C1045 steel with two hole bolt on mounting bracket	.99
DR-58W	5/8"	3"x3"	6,130	18,390	Forged from C1045 steel with weld on mounting bracket	1.86

# SAFETY CHAIN



Product Code	Cell Dia.	Overall Length	Capacity (lbs)	Cell Grade	Hook Description	Unit Wt. (lbs)
SC31624	3/16"	24"	3,200	30	1 S-Hook with safety latch (*1)	.95
SC31627	3/16"	27"	3,200	30	1 S-Hook with safety latch (*1)	1.1
SC31648	3/16"	48"	3,200	30	2 S-Hooks (1 hook on each end of chain assembly) with safety latches (*1)	1.9
SC1427	1/4"	27"	5,200	30	1 S-Hook with safety latch (*1)	1.7
SC1448	1/4"	48"	5,200	30	2 S-Hooks (1 hook on each end of chain assembly) with safety latches (*1)	3.0
SC1454	1/4"	54"	5,200	30	2 S-Hooks (1 hook on each end of chain assembly) with safety latches (*1)	3.4
SC1460	1/4"	60"	5,200	30	2 S-Hooks (1 hook on each end of chain assembly) with safety latches (*1)	3.7
SC113230	5/16"	30"	7,600	30	1 S-Hook with safety latch (*1)	2.7
SC113254	5/16"	54"	7,600	30	2 S-Hooks (1 hook on each end of chain assembly) with safety latches (*1)	5.0
SC1430-G43	1/4"	30"	7,800	43	1 Forged slip hook with safety latch (*2)	2.1
SC51635-G43	5/16"	35"	11,700	43	1 Forged slip hook with safety latch (*2)	3.6
SC3835-G43	3/8"	35"	16,200	43	1 Forged slip hook with safety latch (*2)	5.8
SC1436-G70	1/4"	36"	12,600	70	1 Forged slip hook with safety latch (*2)	2.5
SC3835-G70	3/8"	35"	26,400	70	1 Forged slip hook with safety latch (*2)	5.2

## 2K AND 5K ROUND TUBE JACKS



**TJA-2000-HD**  
2K & 5K Topwind  
Handle



**TJA-2000S-HD**  
2K Sidewind  
Handle



**TJPB-HD**  
Wire Handle  
with Red Knob



**TJA-2000S-GR**  
2K & 5K Sidewind  
Gear Kit



**TJA-2000-BR**  
2K & 5K Bearing



**TJA-2000S-CP**  
2K Sidewind  
Cap



**TJB-MB**  
Mounting  
Brackets



**TJP-IP**  
2" Inner  
Mating Tube



**TJP-IP58**  
2" Inner  
(5/8" hole)  
Mating Tube



**TJP-FP**  
3" Inner  
Mating Tube



**TJP-OP**  
2.5" Mounting  
Tube



**TJP-PN916**  
9/16" Pin  
w/Chain



**TJP-PN58**  
5/8" Pin  
w/Chain



**TJB-MB2**  
Mounting  
Bracket

## SQUARE TUBE AND DROP LEG JACKS



**TJD-7000-BR**  
7K Jack Bearing



**TJD-7000-PN**  
7K Jack Foot Pin



**TJD-12000-CLIP**  
12K Jack Handle Clip



**TJD-7000S-GR**  
7K Sidewind  
Gear Kit



**TJD-7000S-BU**  
7K Sidewind Jack  
Handle Shaft Bushing



**TJD-12000-NUT**  
12K Jack Threaded  
Lift Nut with Grease  
Retaining Structure



**TJD-7000HD**  
7K Topwind  
Handle



**TJD-12000-BR**  
12K Jack Bearing



**TJD-12000-ROD**  
Threaded ACME Rod  
for 12K Jacks



**TJD-7000S-HD**  
7K Sidewind  
Handle



**TJD-12000-GR**  
12K Sidewind  
Jack Gear Kit



**TJD-12000-RSP**  
Spring for 12K  
Spring Return Jacks



**TJD-7000S-CP**  
7K Sidewind  
Jack Cap



**TJD-12000-CP**  
12K Sidewind  
Jack Cap



**TJD2SP-12000-GBX**  
Gear Box for 12K  
Two Speed Jack



**TJD-7000FT**  
7K Jack  
Drop Leg



**TJD-12000-HD**  
12K Sidewind  
Jack Handle



**TJD-12000-SHABU**  
12K Sidewind Jack  
Handle Shaft w/Brass  
Bushings

# REPLACEMENT & REPAIR PARTS



## COUPLER REPAIR PARTS



**CT-2000-RK**  
Repair Kit for 1-7/8"  
Ball Straight  
Channel Couplers

**CT-3000-RK**  
Repair Kit for  
all 2" Ball Stright  
Channel Couplers  
(2", 2-1/2" and 3" Channels)

**CA-5100-RK**  
Repair Kit for 2"  
A-Frame Couplers

## MISCELLANEOUS REPLACEMENT PARTS



**HDKB-BLK**  
Black Handle  
Knob for RAM  
Sidewind Jacks



**MBT58500-LN58**  
5/8" x 5" Grade 8 Bolt/Nut  
for Adjustable Couplers



**JFC-PN**  
Snapper Pin for Jack  
Foot, Caster Wheel  
and Couplers



**HDKB-RED**  
Red Claw Handle  
for RAM Topwind  
Jacks and 30K  
Adjustable  
Gooseneck Coupler



**PLGPIN-12**  
1/2" Plunger  
Pin Assembly



**GCPN-PIN**  
Load Bearing Pin for  
all RAM Load Bearing  
Pin Gooseneck  
Couplers



**GRS-ZERK**  
Jack Grease Zerk



**SS-34103**  
3/4" Set Screw for  
Gooseneck Couplers



**CA-5196-PN**  
Pin for 7K and 12.5K  
Sleeve Lock Couplers



**SNP-RING**  
2" Snap Ring



**GC-RSPN**  
Gooseneck Coupler  
Return Spring  
(For Gooseneck Designs  
with Separate Sliding  
Bottom Plate)



**CA-5196-SPR**  
Spring for 7K and 12.5K  
Sleeve Lock Couplers

## MARINE SWIVEL JACKS



**MJ-1000B-HD**  
Handle replacement  
for MJ-1000 series



**MJ-1000B-MBB**  
Bolt on mounting  
bars and bolts



**JWK-8P**  
8" Poly Wheel



**MJ-1000B-KB**  
Handle knob with  
bolt and nut



**MJ-1000B-GR**  
Gear kit



**MJ-1001B-MK**  
Bolt through  
mounting kit for  
MJ-1001B



**MJ-1000B-CP**  
Cap for 1000lb  
and 1200lb  
Marine Jacks



**MJ-1000B-BR**  
Bearing



**MJ1000B-MK**  
Bolt through  
mounting kit for  
MJ-1200B  
& MJ-1500B



**JWK-6P**  
6" Poly Wheel





**Pacific Rim International, LLC**

5640 NW 135th Avenue | Portland, OR 97229

Ph: 503-614-0587 Fax: 503-645-7083

Email: [contact@pacific-r.com](mailto:contact@pacific-r.com)