
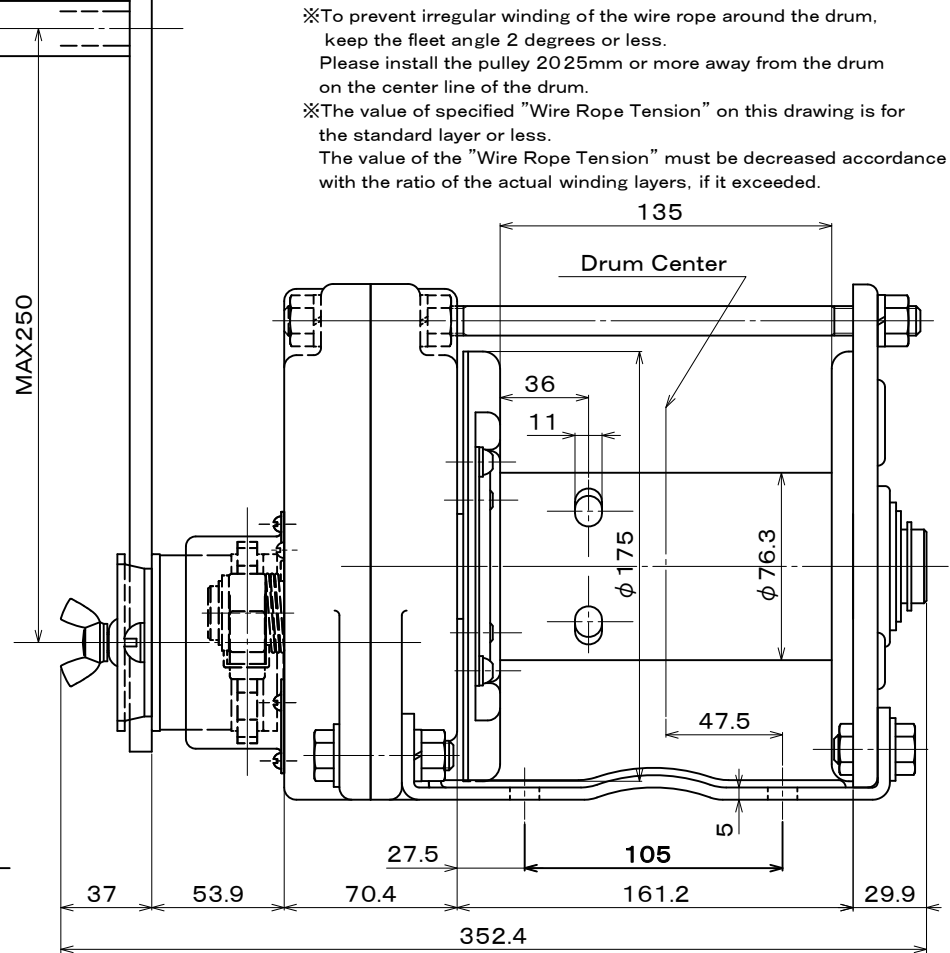


Specifications				(The wire rope composition is a manufacturer recommendation.)	
Load Rating	4,900N (=500kgf)	Handle Force	Handle Length	Number of Wire Rope Winding Layer	
Wire Rope Tension	5th Layer (Standard Layer)		250mm	1st Layer	109N (=11.1kgf)
Drum Capacity	Wire Rope ϕ 6mm (6 \times 37), JIS \times 40m	Standard Accessories	Wire Rope Tension	3rd Layer	142N (=14.4kgf)
Gear Ratio	1/8.9		4,900N	5th Layer	174N (=17.7kgf)
Effective Handle Length	250mm (Maximum)	Painting	One Handle		
Weight	15.4kg (Winch + Handle)		One Hex Wrench for Anchoring the Wire Rope		
			Melamine Resin Coating At Two Layers		
			Painting Color		
			Drum : Black (Munsell N1 Semi Gloss)		
			Others : Munsell 7.5YR6/11		

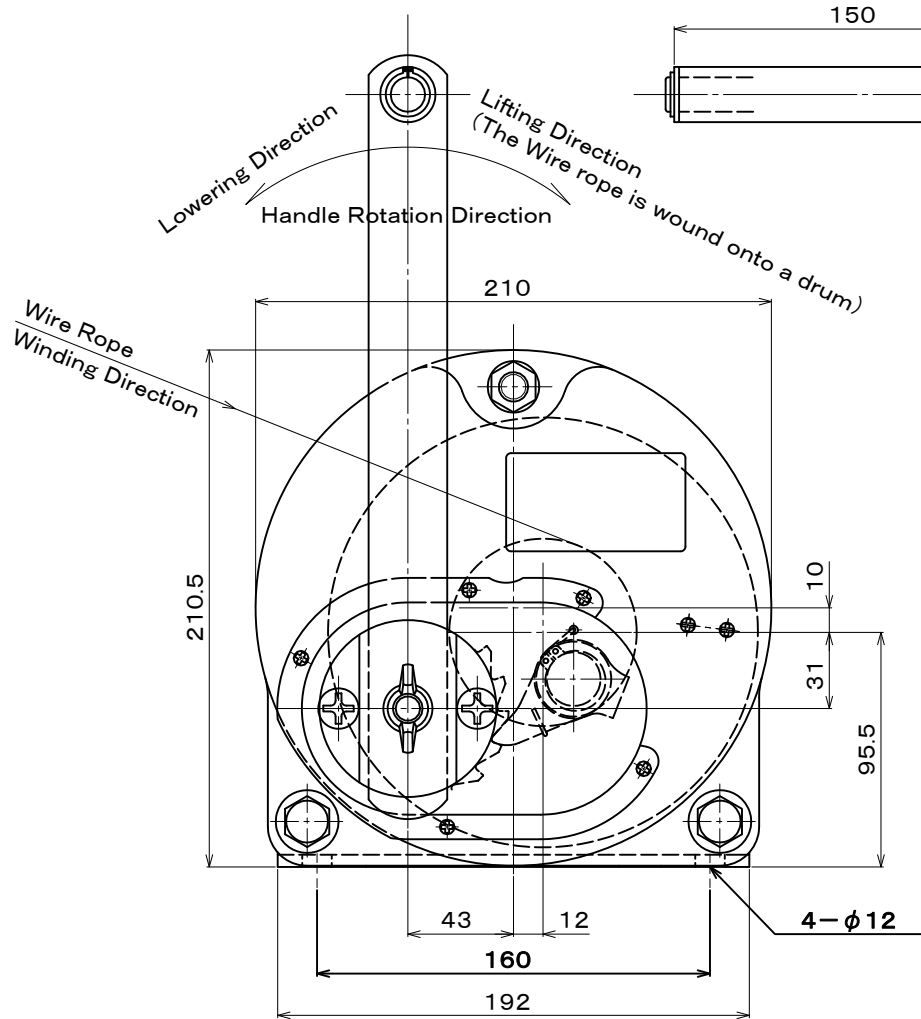

※To prevent irregular winding of the wire rope around the drum, keep the fleet angle 2 degrees or less.

Please install the pulley 2025mm or more away from the drum on the center line of the drum.

※The value of specified "Wire Rope Tension" on this drawing is for the standard layer or less.

The value of the "Wire Rope Tension" must be decreased accordance with the ratio of the actual winding layers, if it exceeded.

④ ×			図面番号 / DRAWING No. GM5SI-160620-01E	改訂番号 / REVISION No. 00	お客様 / CUSTOMER	符号 / MARK	項目 / PARTICULARS	材料 / MATERIAL	数量 / QTY	単体合計 / PER ONE TOTAL	備考 / REMARKS
③ ×			承認 / APPROVED	検図 / CHECKED	作成 / DRAWN	図面名 / TITLE	投影法 / PROJECTION METHOD				
② ×			設計部 '16.06.20 米澤	設計部 '16.06.20 松嶺	設計部 '16.06.20 武松	MAXPULL WINCH STOPPER ARMLESS ROTATING MODEL GM-5-SI	第三角法 THIRD ANGLE PROJECTION				
① ×							尺度 / SCALE				
改訂 / REVISION							台数 / QTY				

