



1.0" CONVEX RADIUS SNAP ON BATTEN PANEL

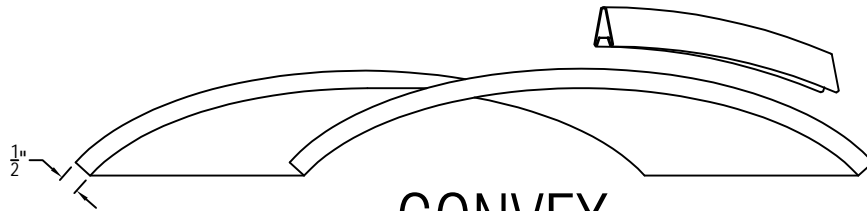

CONVEX

1" SNAP ON BATTEN PANEL, SMOOTH, 2 LOW BEADS
12", 16", 18", AND 20" WIDE PANEL PRE-NOTCHED

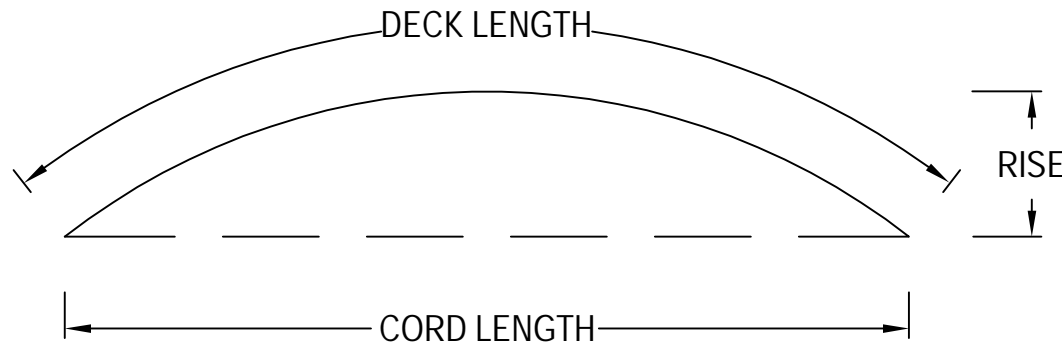

Available Material

Steel: 26 ga, 24 ga, 22 ga
Aluminum: .032
Copper: 16 oz, 20 oz

Standard and Metallic Colors: 29
Available Finishes: Kynar 500/Hylar 5000, SP

Test Data:

- Wind Uplift UL580.....Class 90
- Air Infiltration.....ASTM E 1680-90
- Fire Rating UL 790.....Class A
- Fire Rating UL 263.....Class A
- Hail UL 2218.....Class 4
- Minimum Radius..... 36"
- Custom widths available upon request

Notes:

- Panels install with clip to allow unrestricted thermal movement; spacing is dependent on uplift requirements and panel material used. Clips are available in galvanized steel or stainless steel.
- It is recommended to use stiffer beads or striations for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.

Temple Architectural Products
1111 Lowell St.
Elyria, OH 44035

Phone: (440) 323-9393
Fax: (440) 412-7559

Panel information and description:

TIS: 720-004a

The Snap On Batten Panel offers a concealed clip and a snap on seam cap that allows for thermal movement due to changes in ambient temperatures. This panel is also available in a convex radius or a concave radius. The panel is to be installed over solid substrate. High temperature underlayment is required when used over solid substrate applications. Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply). The panel design makes for a great residential or commercial option.