


Grounding Diagram --

48" square or round base

Ground Rod placed every 120°
in close proximity to tower legs.
connected by #2 wire

20 ft. circumference of
#2 solid copper wire of

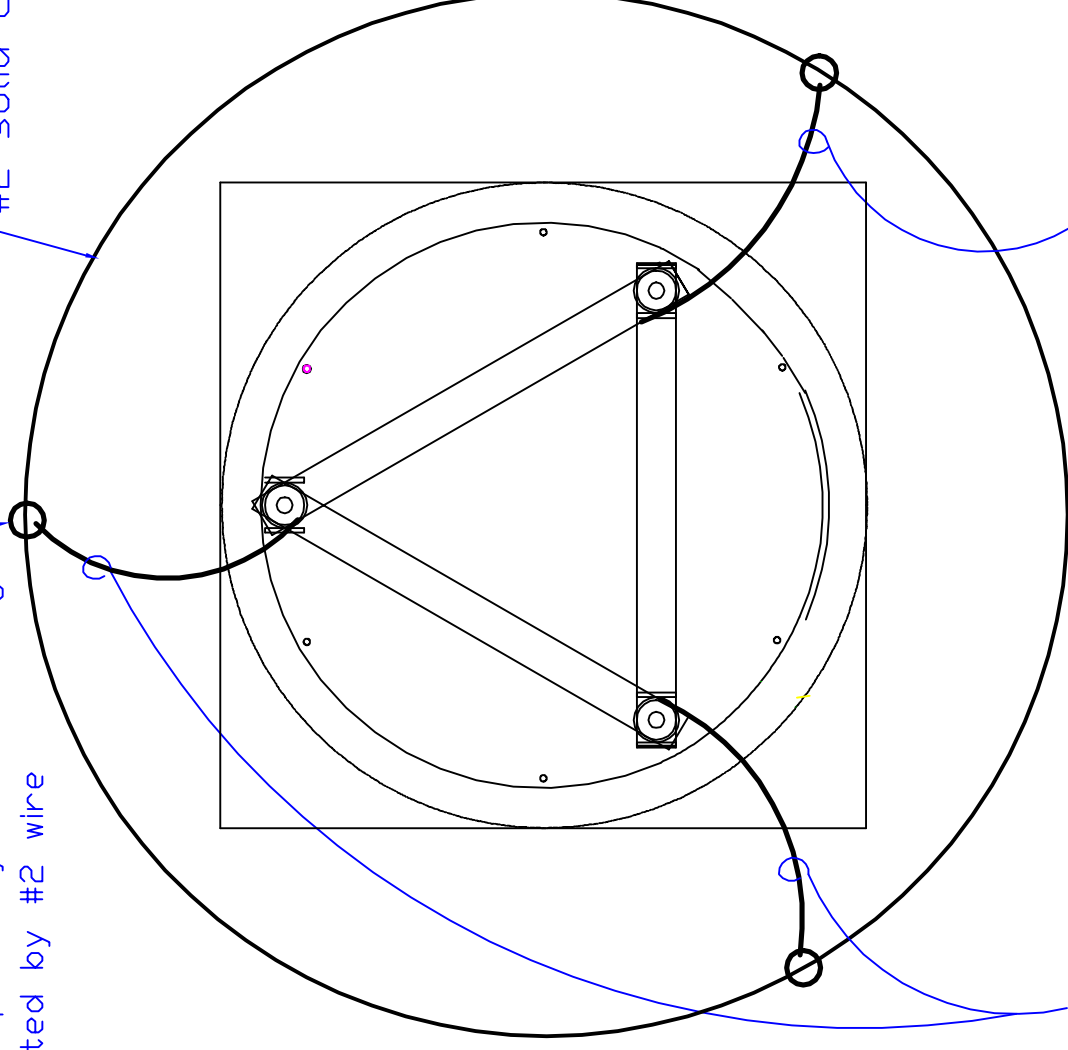

2Ø copper wire to connect from 3/4" ground rod to tower leg
Aluminum strap clamp on legs and copper
swivel clams on ground rods.