


Positive Displacement Rotary Lobe Pumps

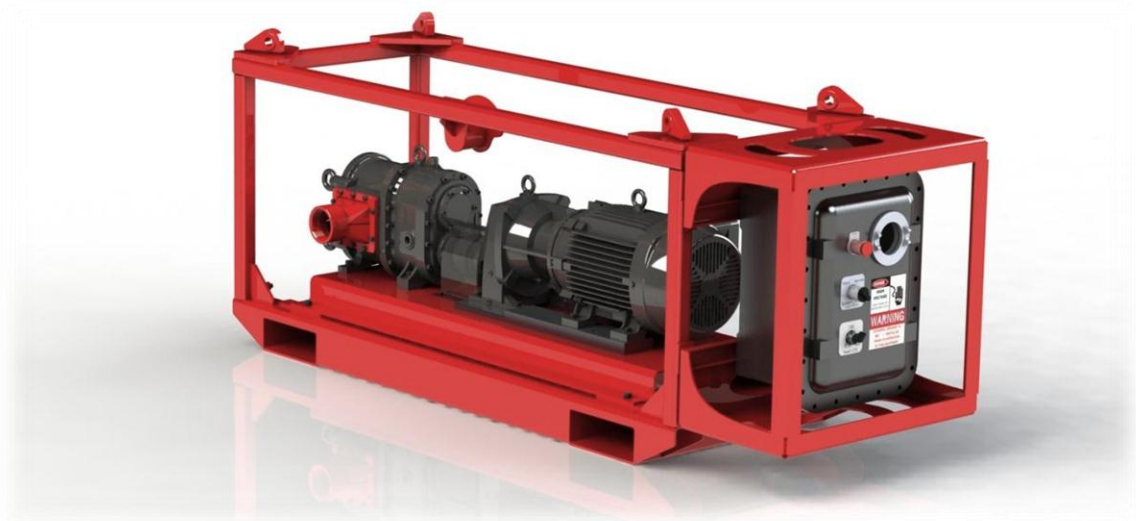

GTech USA supplies a vast variety of Rotary Lobe Positive Displacement Pumps on standard skid packages or customizable to suit your needs. These pumps are superior for pumping sludge, mud and thick fluids. The Maintenance in Place design allows for quick and convenient maintenance or replacement of all wear parts, without disconnecting from piping, drives or others components.

Features:

- Flows up to 5,000 gpm and 180 PSI
- Low Shear
- Reduced Life Cycle Costs
- Dry Run Capability
- Replaceable Rotor Tips and Wear Liners
- Global Service
- Significant Rotor Variety for all Models
- Customizable
- Maintenance in Place
- Custom VFD Enclosures Available
- 460/380v – 60/50hz



Standard Models	Weights/ Dims	Suction/ Discharge	Min/ Max Pump Rate	Max Discharge Pressure
CFS200	1350lbs 87"x27"x36"	3" / 2"	0 – 280gpm	100 PSI
CFS300	1450lbs 87"x27"x36"	3" / 2"	0 - 420gpm	100 PSI
CFS500	1550lbs 87"x27"x36"	4" / 3"	0 - 702gpm	100 PSI