
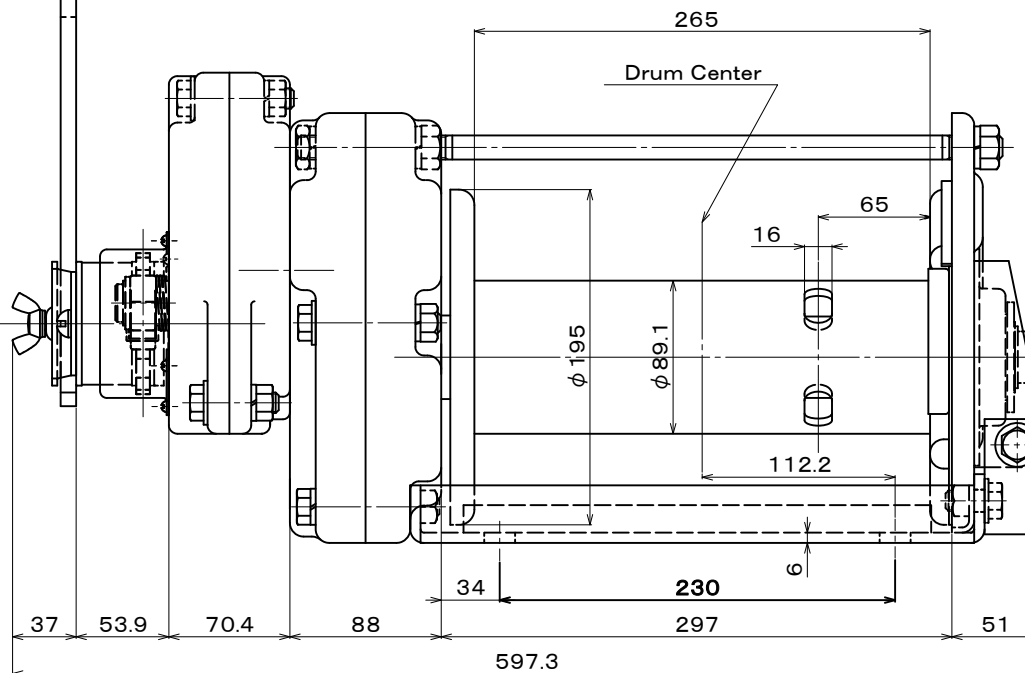
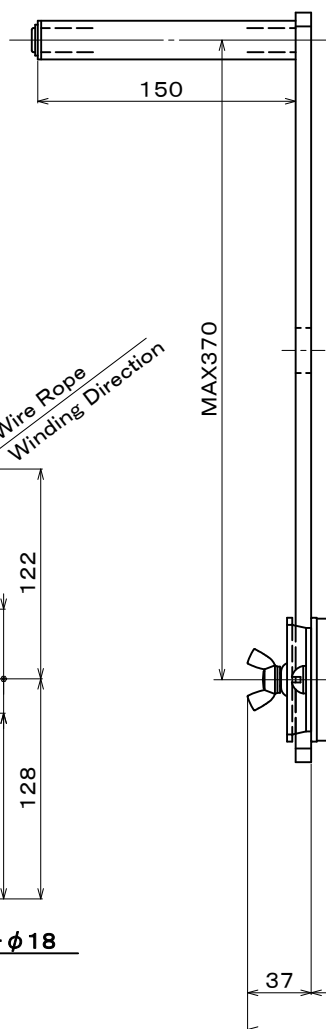


### Specifications

(The wire rope composition is a manufacturer recommendation.)

Load Rating Wire Rope Tension	29,400N (= 3,000kgf) 3rd Layer (Standard Layer)	Handle Force	Handle Length 370mm	Number of Wire Rope Winding Layer 1st Layer 137N (= 13.9kgf) 2nd Layer 169N (= 17.2kgf) 3rd Layer 201N (= 20.5kgf)
Drum Capacity	Wire Rope 4-Layer Windings φ 12mm (6 × 37), JIS × 35m		Wire Rope Tension 29,400N	
Gear Ratio	1 / 35.5	Standard Accessories		One Handle One Hex Wrench for Anchoring the Wire Rope
Effective Handle Length	370mm (Maximum)	Painting		Melamine Resin Coating At Two Layers Painting Color Drum : Black (Munsell N1 Semi Gloss) Others : Munsell 7.5YR6/11
Weight	37.7kg (Winch + Handle)			

- ※To prevent irregular winding of the wire rope around the drum, keep the fleet angle 2 degrees or less. Please install the pulley 3975mm or more away from the drum on the center line of the drum.
- ※The value of specified "Wire Rope Tension" on this drawing is for the standard layer or less. The value of the "Wire Rope Tension" must be decreased accordance with the ratio of the actual winding layers, if it exceeded.

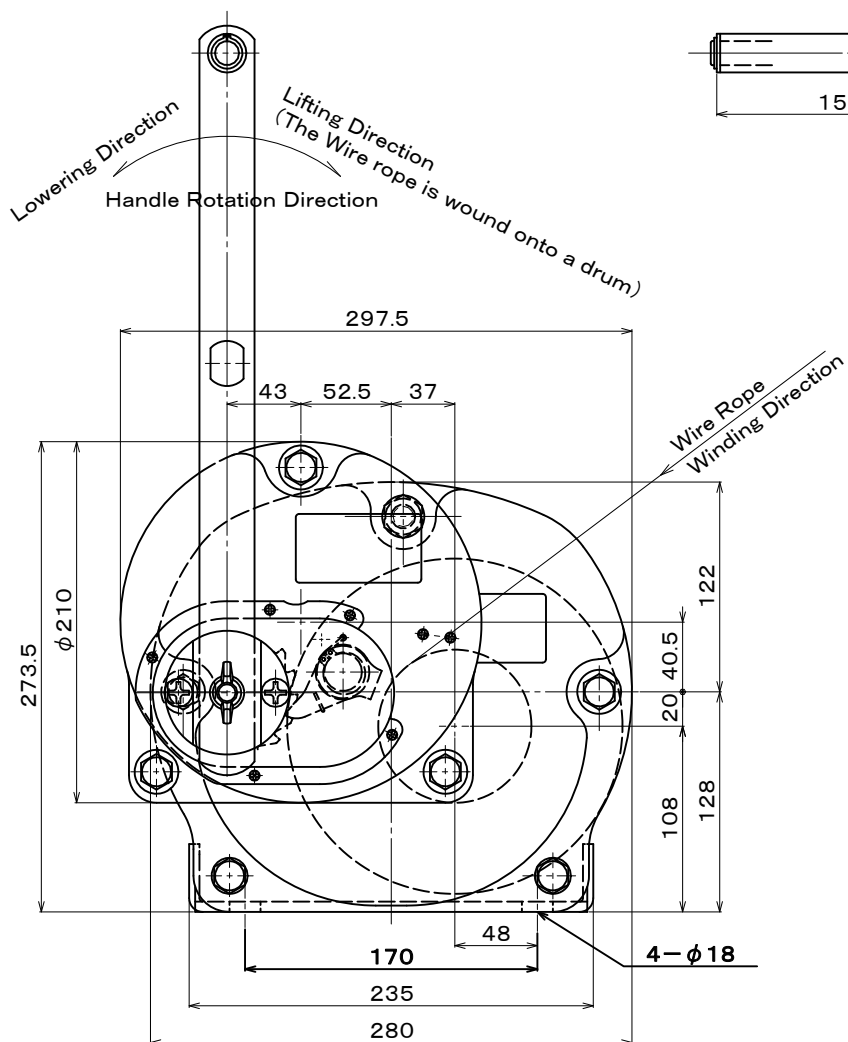

△ ×	..	図面番号 / DRAWING No.	改訂番号 / REVISION No.	お客様 / CUSTOMER	符号 / MARK	項目 / PARTICULARS	材料 / MATERIAL	数量 / QTY	単体 / 合計 / PER ONE / TOTAL	備考 / REMARKS
△ ×	..	GM30SI-160622-01E	00							
△ ×	..	承認 / APPROVED	検図 / CHECKED	作成 / DRAWN	図面名 / TITLE					
△ ×	..	設計部 '16.06.22 米澤	設計部 '16.06.22 松嶺	設計部 '16.06.22 武松	MAXPULL WINCH STOPPER ARMLESS ROTATING MODEL GM-30-SI					
改訂 / REVISION	..				投影法 / PROJECTION METHOD	第三角法 / THIRD ANGLE PROJECTION	尺度 / SCALE		台数 / QTY	MAXPULL MAXPULL MACHINERY & ENGINEERING CO. LTD. マックスプル工業株式会社