

**Houston International Specialty Inc.**

<b>Size</b>	5.5
<b>Grade</b>	P110 HSCY
<b>Weight</b>	20


## TCBC-HT

Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
<b>Coupling</b>	6.050	5.410				
<b>Pipe</b>		4.778	8.250	4.125	0.361	4.653
<b>Pin</b>		4.778				


Torque Values (ft-lbs)				
Field End Make-Up			Max. Working Torque <sup>1</sup>	Yield Torque
Minimum	Optimum <sup>2</sup>	Maximum		
10,000	13,500	18,500	23,250	26,200

Yield Stress (x1000 lbs.)	
Tensile	Compressive
729	729

Maximum Pressure (psi)	
Internal	External
14,360	12,830

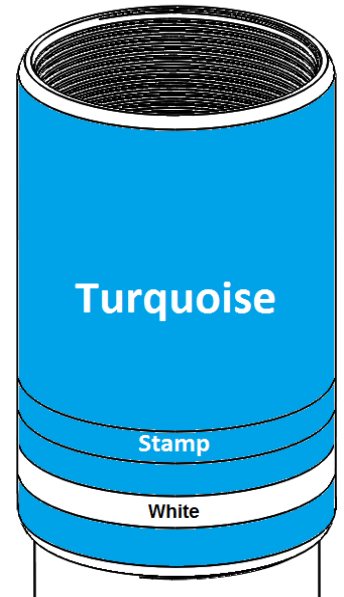

- <sup>1</sup> Max. Working Torque value is not to be exceeded during operation.
- <sup>2</sup> If Optimum Torque does not meet the Base of Triangle Stamp, M/U to the Base of Triangle.

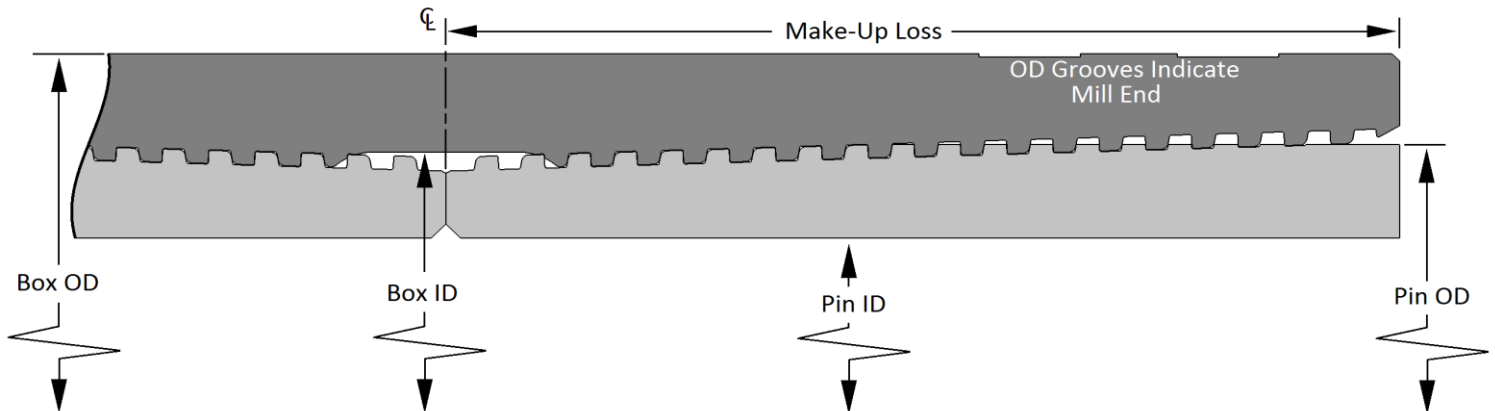

\*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.

rev A

19996 Hickory Twig Way Spring, TX 77388  
 Phone: (281) 602-7550  
 Fax: (281) 602-7557