## Surface Cleaners, Nozzles & Brush

### **Rotary Surface Cleaners**

Clean large surfaces faster and easier than with a standard cleaning nozzle. The Mi-T-M rotary surface cleaners are equipped with strong-bristled brushes for long life and easy glide control. This cleaning accessory can be used on decks, patios, sidewalks, driveways, pool decks, parking lots and any other horizontal surface.

To see more on all our accessories online, scan here or go to www.mitm.com:



### **20-Inch Diameter** AW-7020-8003

- √ 4000-PSI rated
- ✓ Heavy-duty anodized aluminum handle
- ✓ Professional-grade high pressure trigger gun
- ✓ Heat-treated sealed pressure swivel requires no maintenance
- √ 180°F maximum temperature
- √ 3.0 to 5.0-GPM water volume

### 24-Inch Diameter

- √ 4000-PSI rated
- ✓ Lightweight, portable frame with walk-behind design
- ✓ Stainless-steel construction with 4 casters for easy mobility
- ✓ Heavy-duty anodized aluminum handle
- ✓ Professional-grade high pressure trigger gun
- ✓ Shut-off ball valve standard
- ✓ Heat-treated sealed pressure swivel requires no maintenance
- √ 180°F maximum temperature

### AW-7020-8006

- √ 2-nozzle arm spray bar
- √ 4.0-GPM water volume

#### AW-7020-8007

- √ 3-nozzle arm sprav bar
- ✓ 6.0-GPM water volume

### 28-Inch Diameter AW-7020-8001

- ✓ 4000-PSI rated
- ✓ Lightweight, portable frame with walk-behind design
- ✓ Large wheels for mobility
- ✓ Professional-grade aluminum housing
- ✓ Heat-treated sealed pressure swivel requires no maintenance
- ✓ 212°F maximum temperature
- ✓ 4.0 to 10.0-GPM water volume

### Shut-Off Ball Valve

This shut-off ball valve will allow the user to switch back and forth from a rotary surface cleaner to a gun and wand while cleaning.

### 50-0210

- √ 4000-PSI maximum operating pressure
- ✓ 3/8-inch male quick connect steel plug inlet
- √ 3/8-inch male quick connect brass coupler outlet

### **Rotating Nozzles**

Rotating nozzles increase your cleaning power and decrease your cleaning time. They offer 0° spray impact with 25° coverage. Nozzles include filter with quick connect and offer heavy-duty components for long life and reliability. Can be used on sidewalks, driveways, track vehicles, muddy areas, old peeling paints and concrete surfaces. \*Consult factory for correct orifice size.

### AW-7004-Series\*

- ✓ 6000-PSI rated
- ✓ 212°F temperature rating


### AW-7300-Series\*

- ✓ 3600-PSI rated
- √ 190°F temperature rating

### AW-7500-Series\* ✓ 6000-PSI rated

√ 212°F temperature rating





### **Rotating Brush**

The rotating brush offers low pressure rotation for hard to remove debris on sensitive surfaces. Can be used on painted surfaces, fiberglass, wood or brick.

### AW-7003-1500

- ✓ Natural hair bristles
- ✓ Quick connect
- ✓ Adjustable angle
- ✓ 3.0 to 6.0-GPM flow rate
- √ 176°F temperature rating
- ✓ Can be used with low pressure detergent injector





# **Injectors & Hoses**

### **Low Pressure Detergent Injectors**

The low pressure detergent injector allows you to apply recommended detergents. Can be used on cars, boats, vans and engines.

**AW-8400-0021** (2000 to 6000-PSI)

AW-8000-0001 (5000-PSI)

- ✓ Adjustable chemical draw
- ✓ Clear, pliable detergent hose
- ✓ Solid brass body with stainlesssteel orifice for durability
- ✓ Quick connects for easy installation



### **High Pressure Detergent Injector**

With the high pressure detergent injector, large tasks become small. High pressure water mixes with detergent to clean even the heaviest build-up. Can be used on farm equipment, tractor trailers, RVs and bridges.

### 50-0161

- ✓ Brass and stainless-steel construction
- ✓ 2.0 to 6.0-GPM operating capacity
- ✓ Steel mesh in-line water strainer



### Sand Injector

Wet sandblasting is efficient and dust-free. Remove coatings from steel and concrete surfaces. Can be used on rust, paint, stains and graffiti.

AW-3000-0000 (Sand injector - carbide tip)



### Long Range Chemical Nozzle 18-0373

- ✓ Quick connects to the end of the wand
- ✓ Low pressure
- ✓ Has a range of 30-feet while drawing chemical



### Digital Hour Meter/Tachometer 32-0416

- ✓ Simple hour meter with tachometer
- ✓ Updates every 3 seconds
- ✓ RPM to 9,900



### **Extension Hoses**

When you need extra mobility and length.

### **Cold Water**

851-0338 (4000-PSI, R1)

851-0006 (4500-PSI, R2)

**851-0317** (5000-PSI, R2)

- ✓ 50-foot x 3/8-inch ID
- ✓ Non-marking
- ✓ Includes quick connects, swivel and bend restrictors
- ✓ Chemical resistant
- ✓ Wire-braided

851-0362 (6000-PSI, R2)

✓ 50-foot x ½-inch ID

15-0006 (Industrial water supply)

✓ 50-foot x <sup>3</sup>/<sub>4</sub>-inch

### **Hot Water**

#### Steam Hose

**15-0077** (Steam combination, 3000-PSI, R1)

### Hoses Assembled with Screw Connects

850-0174 (2500-PSI & HSP Series, R1)

850-0199 (4000-PSI & HSP Series, R2)

✓ 50-foot x ¾-inch ID

✓ Includes screw connects, swivel and bend restrictors

### Bare Hoses

**15-0146** (3000-PSI, 50-foot x %-inch, R1)


**15-0160** (4500-PSI, 75-foot x %-inch, R2)

**15-0161** (4500-PSI, 100-foot x %-inch, R2)

**15-0162** (4500-PSI, 150-foot x %-inch, R2)

**15-0163** (4500-PSI, 200-foot x %-inch, R2)

- ✓ 3/8-inch male swivel
- ✓ For use with hose reels

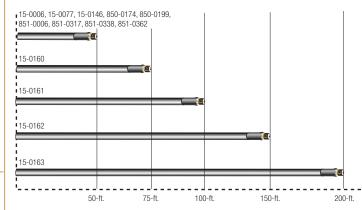





## **Hose Reels**

### **Hose Reels**

Hose reels are convenient for the storage of hoses. Reel capacities based on R1 Mi-T-M hoses.

**50-0195** (13-inch reel, 150-foot maximum hose length, rated for 4000-PSI units and lower)

**50-0196** (16-inch reel, 200-foot maximum hose length, rated for 4000-PSI units and lower)

**50-0164** (13-inch reel without swivel, 100-foot maximum hose length) **50-0165** (16-inch reel without swivel, 200-foot maximum hose length)

- ✓ Frame mount
- ✓ 360° pivoting action on 50-0195 & 50-0196 hose reels
- ✓ Non-pivoting action on 50-0164 & 50-0165 hose reels
- ✓ Easy mount bracket design
- ✓ Clean hands hose guide
- ✓ Live system

Note: Hose reels 50-0164 and 50-0165 must be mounted with 13-0208A01 (45° bracket) or 13-0210A01 (90° bracket). Also, 23-0307 (elbow) and 23-0243 (reducer) are required for jumper hose mounting.



### AW-0050-0138

Bracket - Universal mount (HSP-2500 Models, HS Series and HSE Direct Drive Series)



2

850-0278 Quick connect, 85-inch (HS Series)

### 13-0207A01

Bracket - Wall mount (HG Series)




Bracket - 45° for mounting reels without swivel



Bracket - 90° for mounting reels without swivel





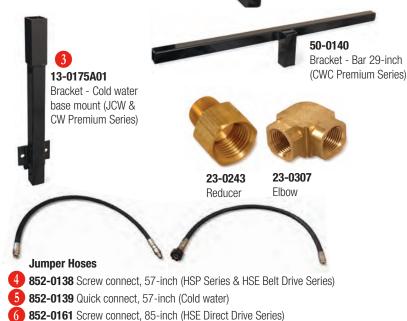



Due to advancements in technology, the design of Mi-T-M hose reels may change after the publication of this catalog.

## **Extension Wands & Gutter Cleaner**

### **Extended Reach Wands**

Clean hard to reach places by using extended reach wands. Can be used on siding, house eaves, farm equipment, semi-tractor trailers and multi-story buildings.

### **Fiberglass Wands**

AW-7018-1200 (12-foot)

AW-7018-1800 (18-foot)

AW-7018-2400 (24-foot)

- ✓ Professional-grade trigger gun with safety lock-off
- ✓ Complete with quick connects
- ✓ Extends from 6-feet, 8-inches to 12, 18 or 24-feet
- ✓ Lightweight and easy to control
- ✓ Compatible with all makes of pressure washers rated up to 4000-PSI
- ✓ Easy hose retraction
- ✓ Can handle water up to 200°F



AW-7017-1800 (18-foot)

AW-7017-2400 (24-foot)

- ✓ Professional-grade trigger gun with safety lock-off
- ✓ Complete with quick connects
- ✓ Extends from 6-feet, 5-inches to 18 or 24-feet
- ✓ Lever locks
- ✓ Compatible with all makes of pressure washers rated up to 4000-PSI
- ✓ Includes belt for additional support



### **Telescoping Wand Belt**

Telescoping wand belt holds telescoping wands which reduces fatigue and strain. It provides better operator control, optimizing cleaning performance.

#### AW-7015-0001

- ✓ Works with AW-7017 and AW-7018 extended reach wands
- ✓ Includes three plastic snap-on clips that snap to your shoulder, waist and wand



#### **Gutter Cleaner**

The gutter cleaner turns your wand into an efficient rain gutter cleaner. Clean your gutters from the ground and blow out dirt, grime, leaves and anything else that may be stuck inside your gutters.

### 50-0201

- ✓ 4000-PSI maximum pressure
- √ ½-inch quick connect socket outlet
- √ 1/4-inch quick connect plug inlet



#### **Aluminum Wand Extensions**

These lightweight, aluminum extension wands allow the user to clean hard to reach areas with ease.

AW-7105-3600 (36-inch)

AW-7105-4800 (48-inch)

AW-7105-7200 (72-inch)

**AW-7105-9600** (96-inch)

- ✓ Aluminum
- ✓ 1/4-inch lance saver socket with quick connect plug
- √ 4000-PSI rated
- √ 12.0 GPM flow rate
- ✓ 300°F temperature rating

