

Sorento LED Vapour Proof

Highly efficient and durable IP65 luminaire for use in wet and dusty areas with a variety of LED options



INTERNAL LIGHTING

- Key Points**
- Designed to offer the largest energy and maintenance savings
- Variety of dimmable options
- Dual LED PCB for extended longevity
- Robust design
- Excellent colour rendering
- 25W to 70W of LED bright white light with high power factor
- A number of occupancy control options
- Choice of emergency options, M3, NM3, Self Test (ST3) and emergency lighting guard with GSM (ELGGSM)
- Single 4FT, single and twin 5FT options.
- Suitable for internal and external applications.
- Full 5 year warranty

- Construction**
- Polycarbonate base and hinged cover.
- Clear polycarbonate high impact diffuser.
- Reinforced drill points on the rear of the fitting.
- Grade 316 stainless steel clips.
- Installation**
- Designed for use in numerous applications such as industry, garages and external applications.
- Cable entry points are at the back and ends of each fitting.

- Specification**
- Numerous options are available for this fitting, key points to consider are emergency and dimmable options. If you require a particular setup of the Hytronik occupancy sensor please contact Lux Bright.


Stock Codes & Descriptions	
Sorento/LED/25W/Dim10%	4FT 10% Dimmable 25W LED FTG
Sorento/LED/25W/Dim10%/EM3	4FT EMG 10% Dimmable 25W LED FTG
Sorento/LED/25W/DimOnOff	4FT Sensor On or Off 25W LED FTG
Sorento/LED/25W/DimOnOff/EM3	4FT EMG Sensor On or Off 25W LED FTG
Sorento/LED/25W/Switched	4FT Switched 25W LED FTG
Sorento/LED/25W/Switched/EM3	4FT EMG Switched 25W LED FTG
Sorento/LED/40W/Dim10%	5FT 10% Dimmable 40W LED FTG
Sorento/LED/40W/Dim10%/EM3	5FT EMG 10% Dimmable 40W LED FTG
Sorento/LED/40W/DimOnOff	5FT Sensor On or Off 40W LED FTG
Sorento/LED/40W/DimOnOff/EM3	5FT EMG Sensor On or Off 40W LED FTG
Sorento/LED/40W/Switched	5FT Switched 40W LED FTG
Sorento/LED/40W/Switched/EM3	5FT EMG Switched 40W LED FTG
Sorento/LED/70W/Dim10%	5FT 10% Dimmable 70W LED FTG
Sorento/LED/70W/Dim10%/EM3	5FT EMG 10% Dimmable 70W LED FTG
Sorento/LED/70W/DimOnOff	5FT Sensor On or Off 70W LED FTG
Sorento/LED/70W/DimOnOff/EM3	5FT EMG Sensor On or Off 70W LED FTG
Sorento/LED/70W/Switched	5FT Switched 70W LED FTG
Sorento/LED/70W/Switched/EM3	5FT EMG Switched 70W LED FTG

Sorento Fluorescent Vapour Proof

Highly efficient and durable IP65 luminaire for use in wet and dusty areas with a variety of T5 options



INTERNAL LIGHTING

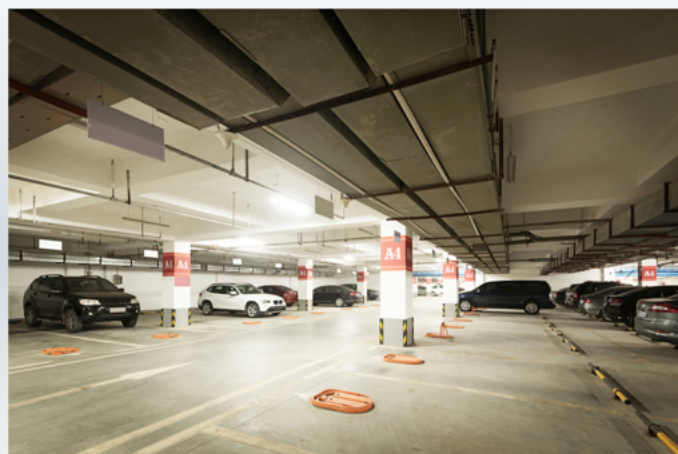

Stock Codes & Descriptions

Sorento/FLU/128/Dim10%	4FT T5 28W Dimmable to 10% FTG
Sorento/FLU/128/Dim10%/EM3	EMG 4FT T5 28W Dimmable to 10% FTG
Sorento/FLU/128/DimOnOff	4FT T5 28W Sensor On or Off FTG
Sorento/FLU/128/DimOnOff/EM3	EMG 4FT T5 28W Sensor On or Off FTG
Sorento/FLU/128/Switched	4FT T5 28W Switched FTG
Sorento/FLU/128/Switched/EM3	EMG 4FT T5 28W Switched FTG
Sorento/FLU/135/Dim10%	5FT T5 35W Dimmable to 10% FTG
Sorento/FLU/135/Dim10%/EM3	EMG 5FT T5 35W Dimmable to 10% FTG
Sorento/FLU/135/DimOnOff	5FT T5 35W Sensor On or Off FTG
Sorento/FLU/135/DimOnOff/EM3	EMG 5FT T5 35W Sensor On or Off FTG
Sorento/FLU/135/Switched	5FT T5 35W Switched FTG
Sorento/FLU/135/Switched/EM3	EMG 5FT T5 35W Switched FTG
Sorento/FLU/235/Dim10%	5FT T5 2x35W Dimmable to 10% FTG
Sorento/FLU/235/Dim10%/EM3	EMG 5FT T5 2x35W Dimmable to 10% FTG
Sorento/FLU/235/DimOnOff	5FT T5 2x35W Sensor On or Off FTG
Sorento/FLU/235/DimOnOff/EM3	EMG 5FT T5 2x35W Sensor On or Off FTG
Sorento/FLU/235/Switched	5FT T5 2x35W Switched FTG
Sorento/FLU/235/Switched/EM3	EMG 5FT T5 2x35W Switched FTG
Sorento/FLU/149/Dim10%	5FT T5 1x49W Dimmable to 10% FTG
Sorento/FLU/149/Dim10%/EM3	EMG 5FT T5 1x49W Dimmable to 10% FTG
Sorento/FLU/149/DimOnOff	5FT T5 1x49W Sensor On or Off FTG
Sorento/FLU/149/DimOnOff/EM3	EMG 5FT T5 1x49W Sensor On or Off FTG
Sorento/FLU/149/Switched	5FT T5 1x49W Switched FTG
Sorento/FLU/149/Switched/EM3	EMG 5FT T5 1x49W Switched FTG
Sorento/FLU/249/Dim10%	5FT T5 2x49W Dimmable to 10% FTG
Sorento/FLU/249/Dim10%/EM3	EMG 5FT T5 2x49W Dimmable to 10% FTG
Sorento/FLU/249/DimOnOff	5FT T5 2x49W Sensor On or Off FTG
Sorento/FLU/249/DimOnOff/EM3	EMG 5FT T5 2x49W Sensor On or Off FTG
Sorento/FLU/249/Switched	5FT T5 2x49W Switched FTG
Sorento/FLU/249/Switched/EM3	EMG 5FT T5 2x49W Switched FTG

Construction

Polycarbonate base and hinged cover.
Clear polycarbonate high impact diffuser.
Reinforced drill points on the rear of the fitting.
Grade 316 stainless steel clips.

Installation

Designed for use in numerous applications such as industry, garages and external applications.
Cable entry points are at the back and ends of each fitting.

Specification

Numerous options are available for this fitting, key points to consider are emergency and dimmable options. If you require a particular setup of the Hytronik occupancy sensor please contact Lux Bright.

Key Points

Designed to offer cost effective energy savings
Variety of dimmable options
Robust design
Excellent colour rendering
Reliable European HF ballast(s) used
Supplied with lamps
A number of occupancy control options
Suitable for internal and external applications
Choice of emergency options, M3, NM3, Self Test (ST3) and emergency lighting guard with GSM (ELGGSM)