




ELITE FLEXIBLE DUCTING TYPE DM

TYPE DM

- UL-181 Listed Class 1 Air Duct
- Owens Corning GREENGUARD Certified R6 Insulation
- +SCS Certified (Recycled Content)
- Vinyl-Coated Fiberglass Core
- Reinforced Metallized Vapor Barrier
- High Pressure Rated
- Maximum Rated Velocity
- Thermal Reliability
- No Glues/Adhesives used to Produce Core
- Air Tight & Leak Proof
- Smooth Lock Interior Core Design
- Meets NFPA 90A & 90B; ASTM Standards

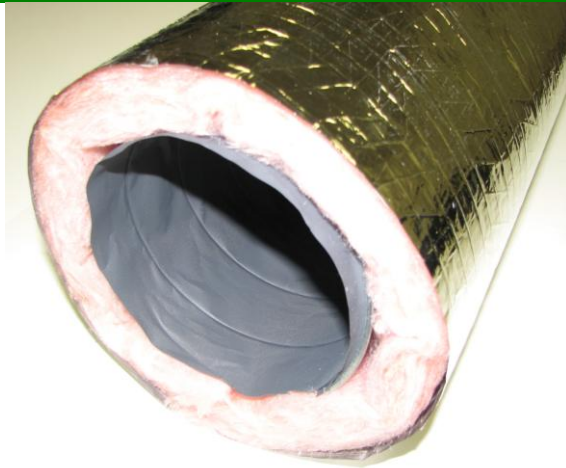

TECHNICAL DATA:

Underwriters Laboratories Listed	Class 1 Air Duct
Flame Spread - Smoke Developed	< 25/50
Positive Pressure (03" – 20")	20 in. WC
Negative Pressure (03" – 12")	10 in. WC
Negative Pressure (14" – 16")	5 in. WC
Negative Pressure (18" – 20")	1 in. WC
Velocity	5500 FPM
Operating Temperature	-20°F to +250°F
Fiberglass Insulation- Owens Corning Greenguard Certified	R4.2 & R8 Available



SUGGESTED SPECIFICATION:

Insulated flexible ducting shall be Type DM by Peppertree Air Solutions Inc. The core shall be constructed of a vinyl-coated fiberglass cloth; Spirally wound and mechanically locked to an exterior galvanized steel helix. Wrapped in Owens Corning GREENGUARD Certified FIBERGLAS® insulation; and sleeved with a reinforced metallized vapor barrier. This product shall be UL-181 Listed as Class 1 Air Duct with a Flame Spread/Smoke developed rating not over 25/50.

This product also offers a high recycled content; low emissions of volatile organic compounds (VOCs); reduced building energy demand; enhanced moisture control; and minimized noise transfer through building assemblies.