

# **ELKA HOUSINGS**

## **MADE OF ALUMINIUM**

HIGH QUALITY AND TESTED SAFETY

COMFORTABLE OPERATION AND EASY INSTALLATION ROBUST, DURABLE



The high-quality aluminum housing offers plenty of space for additional installations, additional service doors, optional modern LED lighting and makes on-site installation easier in a completely new way. A flexible concept with modular design and clear cable management.





## Comfortable


- Simple cable management via clips, which can be repositioned variably on the corner profiles without tools
- ✓ One-hand locking of the removable cover
- Mounting plate can be variably positioned on the corner profiles on site

### **Additional installations**

- Plenty of space for additional installations (assembly dimensions per PKW housing (W x D x H) 250 x 400 x 450 mm)
- ✓ Installation through removable front panel (lockable), lateral access door (lockable) or removable hood
- Optional installation service for ELKA products, as well as for provided accessories
- ✓ Optional shelf installed



## Aluminium-housings PKW/LKW 2400-v2.0

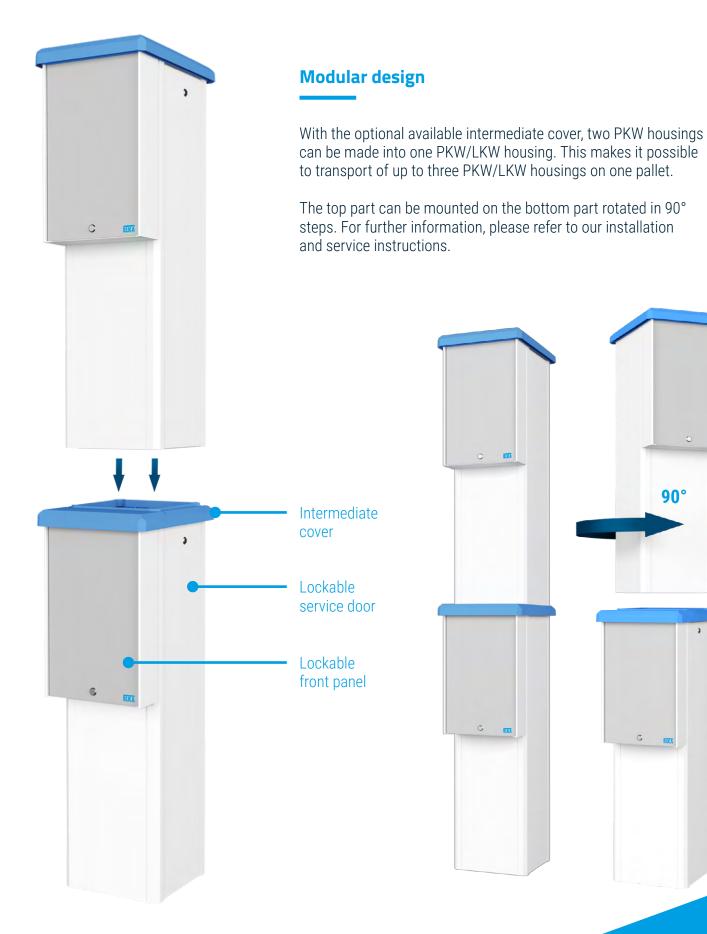





## Service door

- The position of the door can be optionally determined when ordering (for the PKW/LKW housing, the door of the top part cannot be placed above the front panel of the bottom part)
- ✓ Standard on the left side (view from the front)

## **LED lighting**

- ✓ Optional LED lighting with low power consumption
- Lighting in warm white, cool white or RGB (red / green / blue) possible

## **Custom colors**

- ✓ Optionally available in all RAL custom colors
- Standard colors: Housing RAL-9010 (white) / Hood RAL-5012 (blue) / Front panel RAL-7035 (light gray)




### **Convenient shipping**


✓ Up to six PKW housings or up to three PKW/LKW housings stackable on one EURO pallet







Technical data	Aluminium-housing PKW 1200-v2.0	Aluminium-housing PKW/LKW 2400-v2.0
Dimensions max. (W x D x H) in mm	379 x 486 x 1,200	379 x 486 x 2,386
Assembly dimensions (W x D x H) in mm	250 x 400 x 450	each 250 x 400 x 450
Weight in kg	30.5	60
Service door	Standard on the left side (view from the front)	
Degree of protection	IP 54	
Material	Housing: aluminium, powder-coated Base plate: steel, hot-dip galvanized	
Colours	Housing RAL-9010 (white) / Cover RAL-5012 (blue) / Front plate RAL-7035 (light grey), optionally available in all RAL custom colors	
Accessories (optional)	LED lighting under the hood, clips for variable cable routing, power supply	

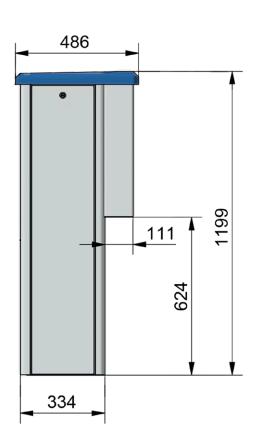

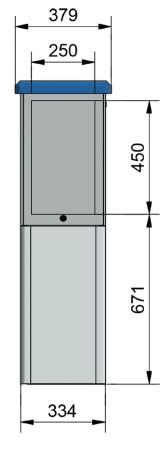


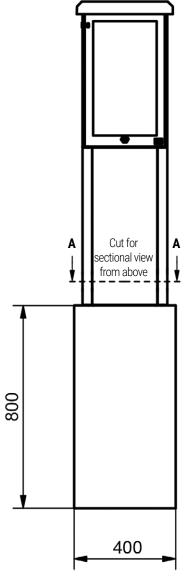

A-A: Sectional view from above



All dimensions in mm.

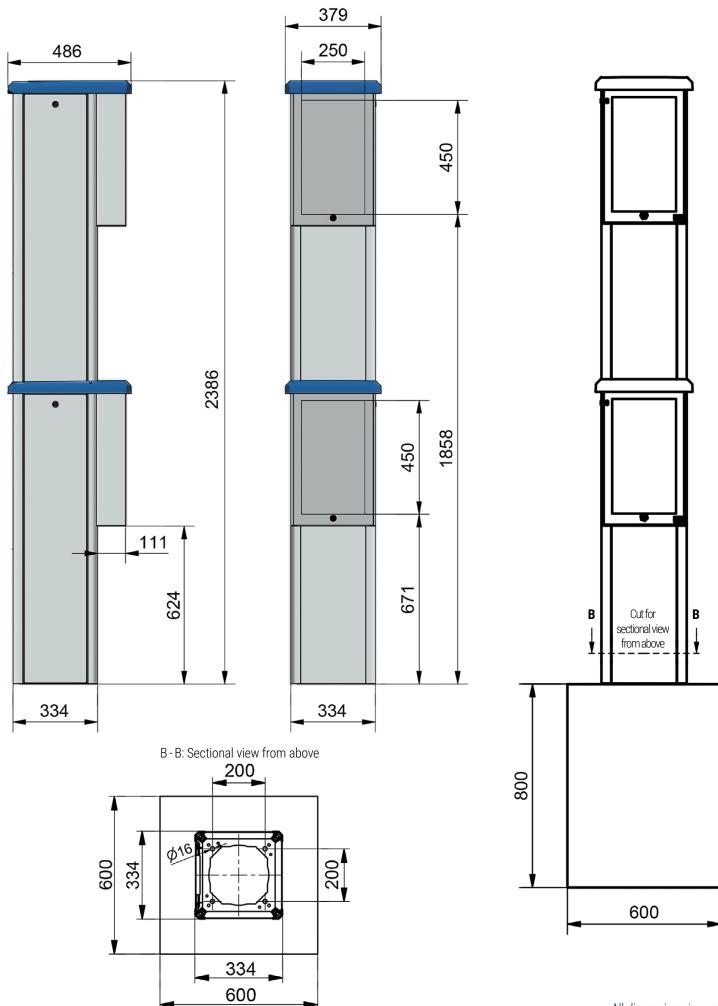

All dimensions in mm.



Q-SAQ INC
2735 Center PL STE 104
Melbourne, FL 32940 USA

↓ +1 321-248-6749
☑ info@q-saq.com

😵 www.q-saq.com

