





G-Tech

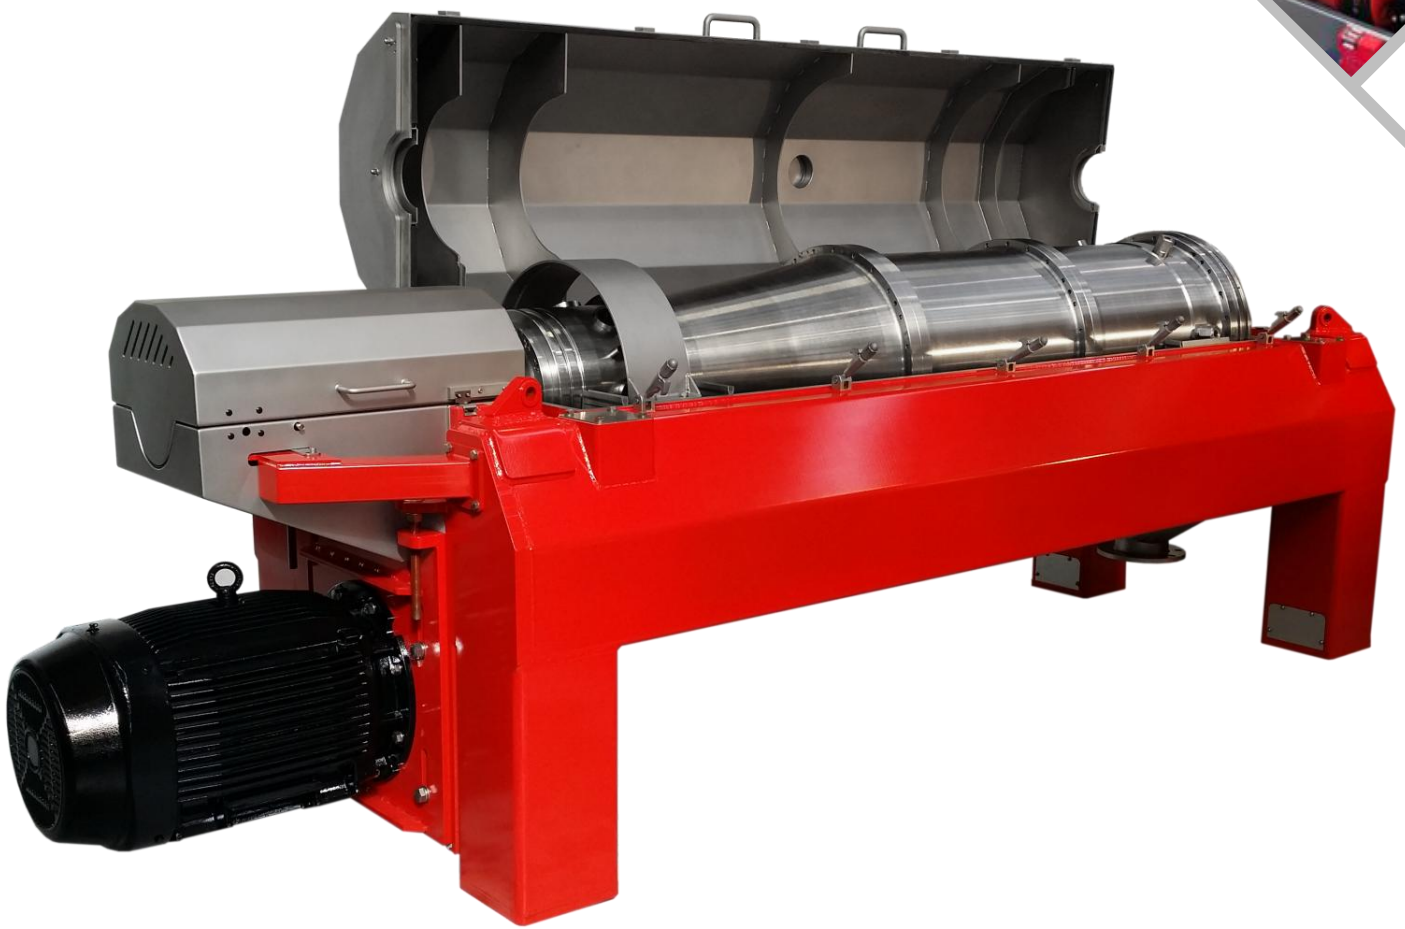

Decanter G2080

Specifications

Application:	2 or 3 Phase separation
Capacity:	12m ³ /hr – 32m ³ /hr (product dependant)
Bowl Diameter:	530mm (20.9")
Bowl Length:	2270mm (89.4")
Max Bowl Speed:	3000rpm
Max G-Force:	2660g
Power:	WEG 37kW Motor
Gearbox:	Hydraulic Viscotherm Rotodiff or 8.0kNm planetary gearbox (97:1)
Materials/Finish:	Bowl material: Duplex Stainless Steel/Wetted Parts: Stainless Steel
Options:	Conveyor wear protection options Other options on request
Features:	Spring assisted LH/RH configurable cover Easy access LH/RH configurable cover for Rotodiff or gearbox Internal electrical cable routing passages

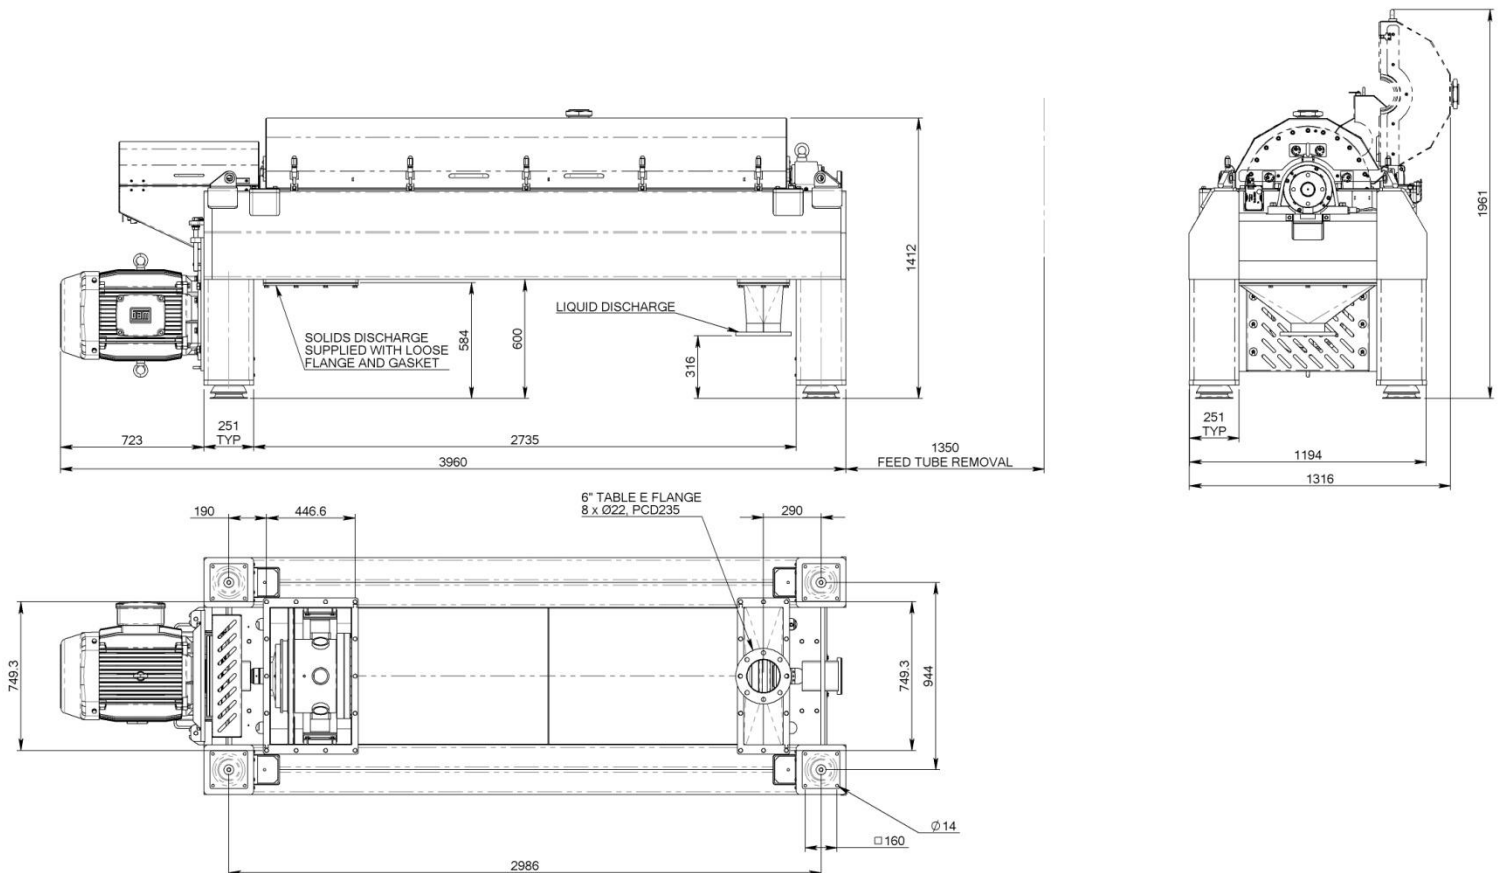

Contact Us

USA

2511 N Frazier Street
Conroe
Texas 77303
Tel: +1281 290 9229
Email: sales@gtechus.com
Website: www.gtechus.com
ISO9001 registered

New Zealand

P.O. Box 29 · Kaiapoi 7644
21 Empire Rd. · Kainga
Christchurch 8083 New Zealand
Tel: +64 3 323 6151
Email: sales@gtechnz.com
Website: www.gtechnz.com
ISO9001 registered

Australia

14A Nicholas Drive,
Dandenong 3175
Victoria, Australia
Tel: +61 3 9768 3866
Email: sales@gtechau.com
Website: www.gtech-australia.com



ISO 9001