



Houston International Specialty Inc.

Size	7
Grade	P110
Weight	26

TCPC


Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
Coupling	7.656	6.189				
Pipe		6.276	10.812	4.860	0.362	6.151
Pin		6.189				

Torque Values (ft-lbs)				
During Make-Up			Max. Working Torque	Yield Torque
Minimum	Optimum	Maximum**		
7,350	10,200	12,800	30,700	38,400


Yield Stress (x1000 lbs.)	
Tensile	Compressive
830	830

Maximum Pressure (psi)	
Internal	External
9,960	6,230

Blanking Dimensions (in)			
	ID (+0.0 -0.032)	OD (+0.032 -0.0)	OAL (+1.5 -0.0)
Box End	6.189	7.656	5.860
Pin End	6.189	7.000	5.360

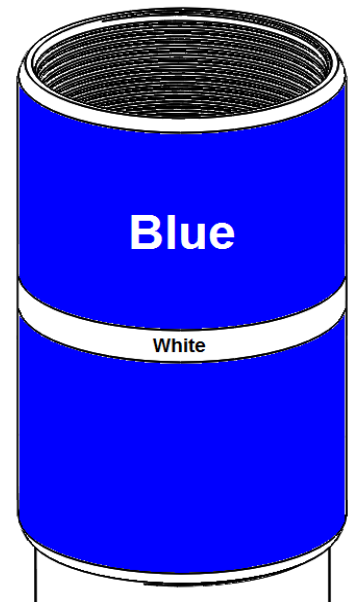

**Max M/U Torque may be exceeded only by approval from the Thread Representative.

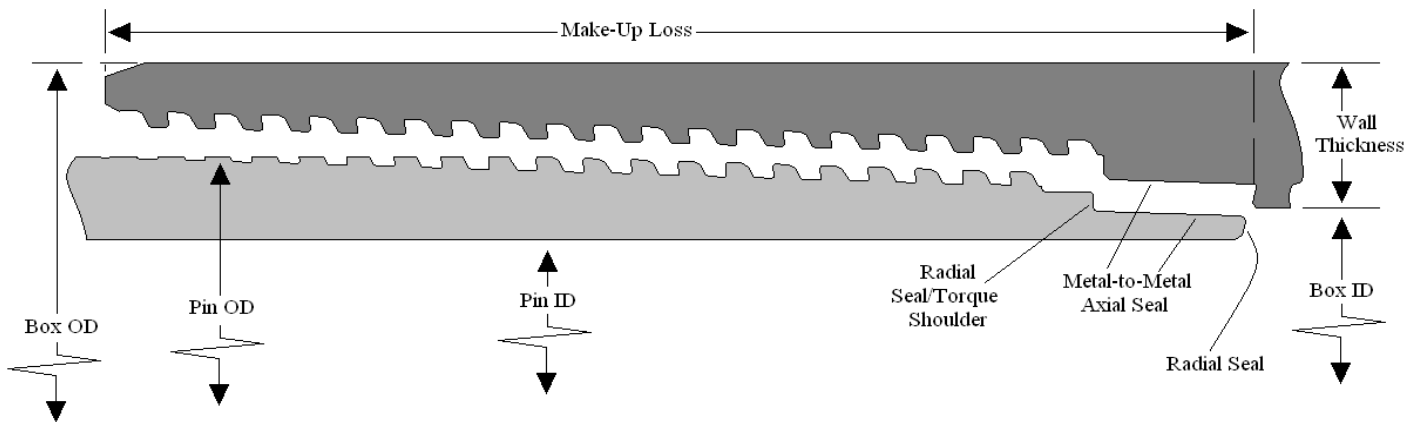

*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.