



MODEL HR 40 ROTAVATOR[®]

**Tillage Widths of 80", 90", 100" & 120"
... for Tractors from 80 H.P. to 135 H.P.**

Howard's Model HR 40 ROTAVATOR is a rugged, all-purpose rotary tiller for medium to large-acreage producers. Designed for both primary tillage and seedbed preparation, it features an exclusive new depth-control system that converts it from fall to spring tillage in minutes. It also offers precise tilth control for efficient operation in a wide range of soils and residues. Built to save fuel and field time, the versatile HR 40 ROTAVATOR brings new year-round economy to your tillage operation.




MODEL HR 40 ROTAVATOR

ALL-SEASON TILLAGE IN ONE VERSATILE TOOL

The Model HR 40 ROTAVATOR features a new, exclusive depth-control system that gives you year-round tillage capability. The standard twin wheels slide out; the optional full-width crumble roller "plugs in." Converting from fall to spring tillage is just that easy.

In the fall, equipped with wheels and the trailing shields raised, the HR 40 leaves a rough soil finish for winter "mellowing." It also chops and incorporates the toughest crop residues to build soil structure and control erosion.

Then in the spring, with the crumble roller plugged in and trailing shields lowered, one pass is all that's usually needed for a ready-to-plant seedbed. The roller controls tillage depth while leveling and slightly firming the seedbed. It also eliminates wheel marks.

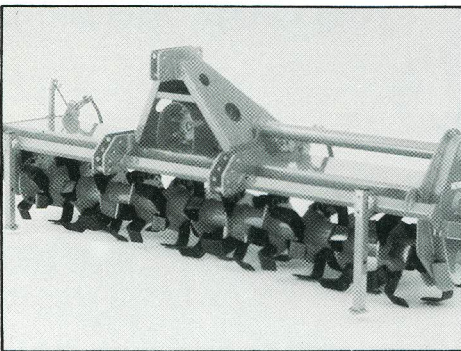

For the ultimate seedbed economy, you can hitch a drill or planter to the ROTAVATOR and incorporate chemicals at the same time!

SAVES FUEL, TIME AND TRACTOR WEAR

Since the hardworking HR 40 does more in fewer trips, it saves on fuel and field time. It saves tractor wear, too. The rotating blades add a power and traction assist to forward travel. They also incorporate chemicals more uniformly than pull-type tillage tools.

EASY, ACCURATE TILTH CONTROL

SELECTATILTH lets you choose different rotor speeds for varying soil conditions to achieve the exact tilth desired. Changing speeds takes just minutes and requires no special tools.


A RUGGED PERFORMER WITH A TOUGH ACT TO FOLLOW

Replacing Howard's "S" ROTAVATOR, a popular model for over a decade, the HR 40 offers more tillage widths and new features. A specially reinforced, all-gear side drive and one-piece input shaft/pinion assure greater strength and durability. The newly designed topmast accepts planter or drill hitches. Spring-loaded trailing shields provide greater tilth control.

MANY MODELS TO CHOOSE FROM

Howard manufactures a full line of ROTAVATORS for all crops and every tillage need. Choose models from 32 inches to 240 inches wide for 10 H.P.

to 250 H.P. tractors. Contact your local Howard dealer or write direct for complete details.

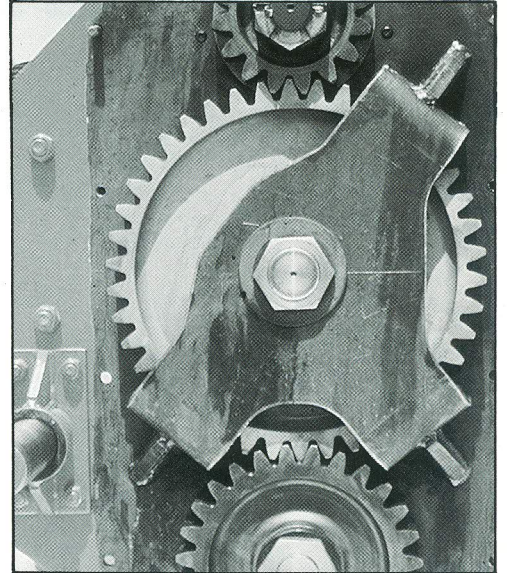

SPECIFICATIONS

Tillage Widths: 80", 90", 100" & 120"

Power Range: For tractors from 80 to 135 H.P. with 1000 rpm PTO.

Linkage: Category II, 3-point hitch.

Tillage Depth: Adjustable to 8" via twin wheels standard. Crumble roller optional on 100" & 120" models.

Rotor Speeds: 175, 195, 215 & 235 rpm.

Machine Weights: 80"-1,855 lbs., 90"-1,985 lbs., 100"-2,095 lbs., 120"-2,315 lbs.

DEALER



Howard Rotavator Company, Inc.
A Member of the Howard Group

102 Howard Ave., P.O. Box 7, Muscoda, Wisconsin 53573 (608) 739-3106
Branch in Sacramento, California 95821 (916) 483-2777

HOWARD® are registered trademarks of HOWARD ROTAVATOR COMPANY.
PARAPLOW®
ROTASPIKE®
ROTAVATOR®
SELECTATILTH®
TURF-QUAKER®

