


# Multi-Grip Rivets

## Aluminum

5050 Aluminum Body / Aluminum Mandrel

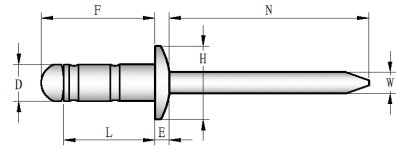

<b>Domed Head</b>												
Nominal Body Diameter (D)	Part Number	Body Diameter (D)	Grip Range (Min) (Max)	Hole Size & Drill No.	Body Length ±.015 (L)	Overall Body Length MAX (F)	Minimum Mandrel Protrusion (N)	Mandrel Diameter (W)	Flange (head) Diameter (H)	Flange (head) Thickness (Ref)(E)	Typical Shear min Lbs.	Typical Tensile min Lbs.
1/8	ADAMG4244	0.125	0.062 - 0.250	.129-.142#30	0.427	0.562	1.00	0.076	0.250 ±.012	0.032	120	150
	ADAMG4345	0.125	0.157 - 0.312	.129-.142#30	0.453	0.588	1.00	0.076	0.250 ±.012	0.032	120	150
3/16	ADAMG6264	0.188	0.063 - 0.250	.192-.205#11	0.425	0.600	1.06	0.114	0.375 ±.015	0.060	260	320
	ADAMG6366	0.188	0.187 - 0.375	.192-.205#11	0.605	0.780	1.06	0.114	0.375 ±.015	0.060	260	320