

**Houston International Specialty Inc.**

<b>Size</b>	10.75
<b>Grade</b>	J/K 55
<b>Weight</b>	51

## TCPC



Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
<b>Coupling</b>	11.490	9.784				
<b>Pipe</b>		9.850	13.250	5.625	0.450	9.694
<b>Pin</b>		9.784				

Torque Values (ft-lbs)				
During Make-Up			Max. Working Torque	Yield Torque
Minimum	Optimum	Maximum		
11,000	12,250	13,500	15,000	18,500

Yield Stress (x1000 lbs.)	
Tensile	Compressive
801	801

Maximum Pressure (psi)	
Internal	External
4,030	2,700

Blanking Dimensions (in)			
	ID (+0.0 -0.032)	OD (+0.032 -0.0)	OAL (+1.5 -0.0)
<b>Box End</b>	9.850	11.490	6.625
<b>Pin End</b>	9.850	10.750	6.125

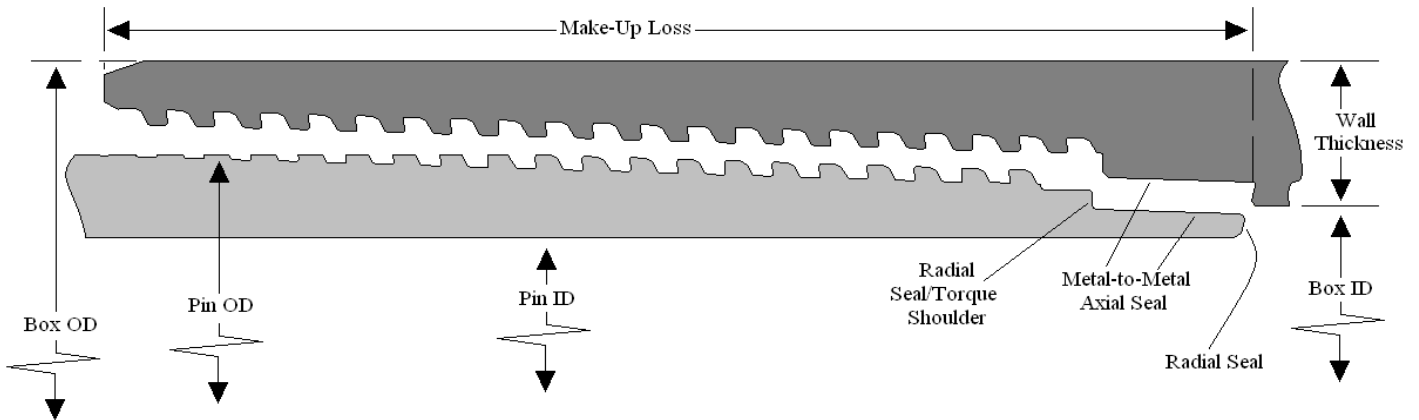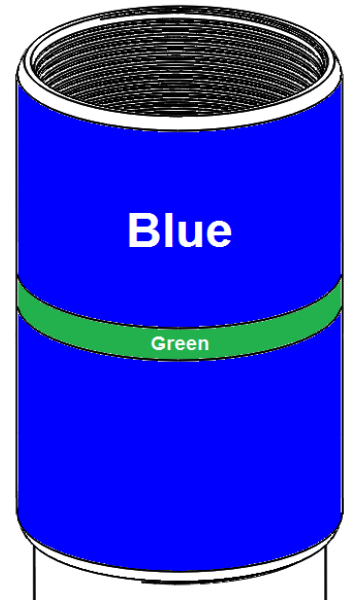

\*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.