

*Commercial
Multi-Family
Primed
Prefinished
Galvanneal
Doors & Frames*




HOLLOW METAL STEEL DOORS & FRAMES




HOLLOWMETAL

HollowMetal Frames


Masonry Series Frames




10 Gauge hinge reinforcing



Typical KD (Knock Down) corner section.




ANSI 1 1/4" x 4 7/8" Strike Assembly with optional Deadbolt punch out complete with tabs.

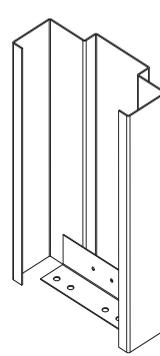


Masonry Base (Floor) Anchors

- Available Kerf or Non-Kerf
 - Stick-on mutes (standard)
 - Punch mutes (optional)
- Knock-down (KD) design; can be field or factory welded
- 16 gauge, A40 galvaneal
- Welded-in expansion bolt anchors, (optional)
- Hinge Preps: 3 1/2" square corner, 4" x 1/4" radius, 4" x 5/8" radius, 4-1/2" square corner and 5" square corner
- Strike Preps: T-Strike, ASA, and Deadbolt
- Built-in strike mortar boxes (standard)
- Built-in hinge mortar guards (optional)
- Tab and slot construction
- Finishing: Standard Rediframe® colors, custom colors or prime for field painting


DW Series Drywall Frames

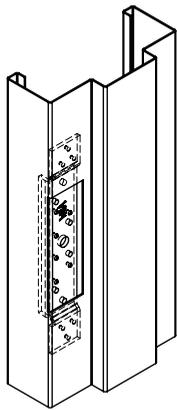

10 Gauge hinge reinforcing

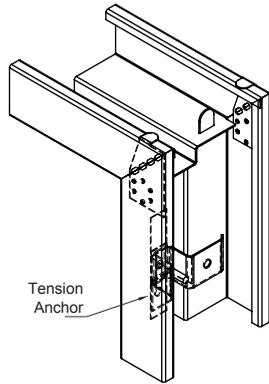


Typical KD (Knock Down) corner section includes tension anchor.

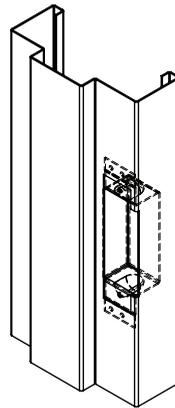


ANSI 1 1/4" x 4 7/8" Strike Assembly with optional Deadbolt punch out complete with tabs.

- Available Kerf or Non-Kerf
 - Stick-on mutes (standard)
 - Punch mutes (optional)
- 16 gauge, A40 galvaneal
- Knock-down (KD) design
- 18-gauge corner reinforcements to maintain proper miter alignment
- Welded-in steel compression anchors
- Available with 2" face; 1/2" returns
- Available in 5-1/2" to 14" (Non-Kerf) or 5-1/2" to 13-3/8" (Kerf)
- Strike Preps: T-Strike, ASA, Deadbolt and three (3) 9/32" silencers.
- Built-in strike dust boxes (standard)
- Tab and slot construction
- Finishing: Standard Rediframe® colors, custom colors or prime for field painting


ADJ DW Series Frames

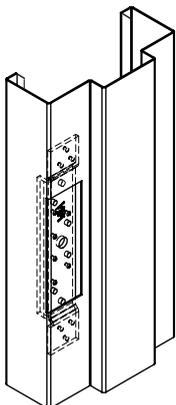

10 Gauge high frequency hinge reinforcing

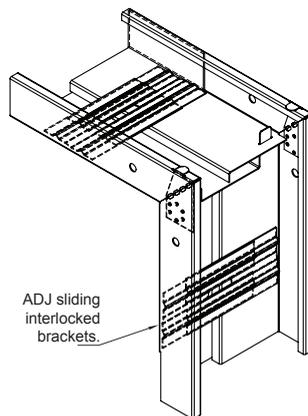


Typical KD (Knock Down) corner section includes sliding interlocked brackets.

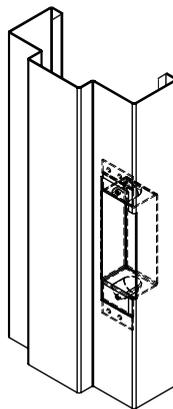

ANSI 1 1/4" x 4 7/8" Strike Assembly with optional Deadbolt punch out complete with tabs.


- 16 GA Galvaneal Steel (standard)
- For use with 1 3/4" thickness doors (steel or wood).
- Adjustable Jamb Depth size:
 - Small ADJ - from 5 1/2" to 8 3/4";
 - Large ADJ - from 8 1/2" to 13 1/4".
- Prepared for (3) 9/32" silencers.
- Prepared to receive countersunk screws #7 x 2 1/2.
- Prepared with 12 gauge ASA strike reinforcement.
- Prepared with three 4 1/2" standard weight 10 gauge hinge reinforcements.
- Available Fire Rating 1 1/2 hr. on single frames maximum size 4'0" x 8'0" and on double frame - 8'0" x 8'0".
- Factory primed only

LS Series Door Lock Seam (1 3/4" Thick)

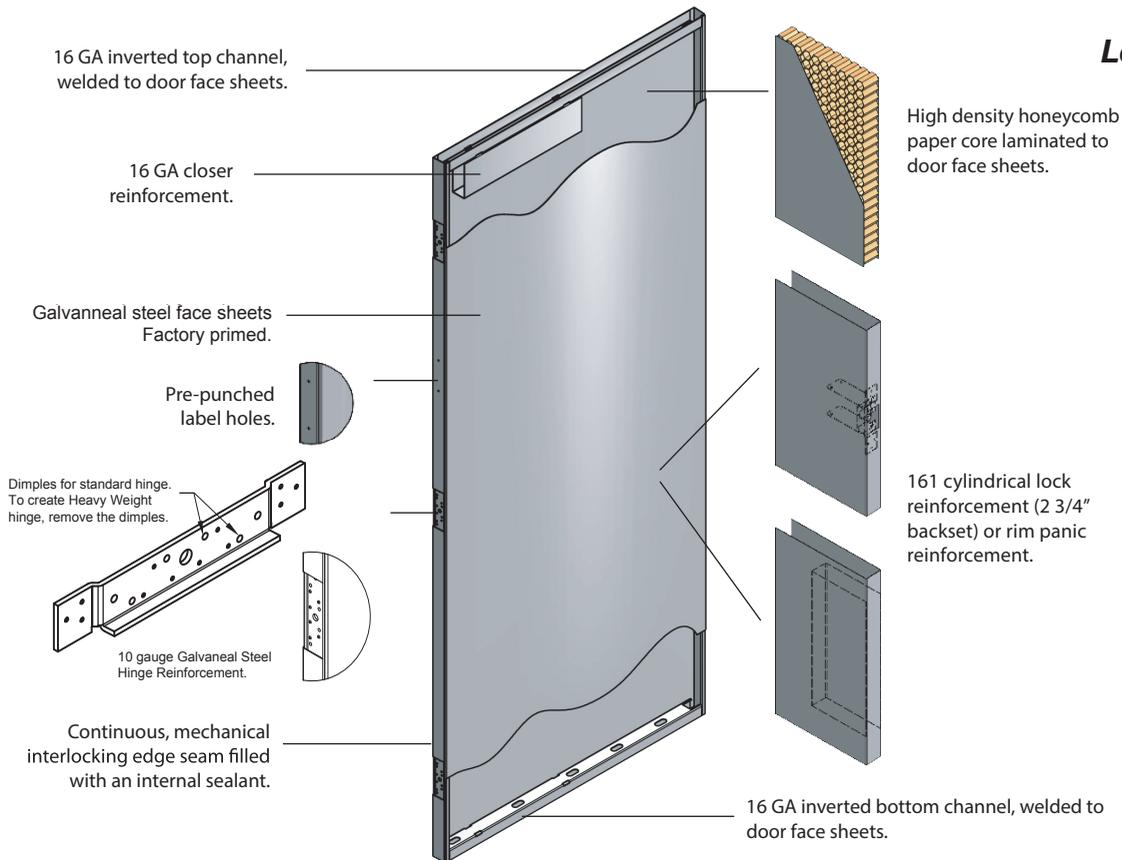

LS Series Doors are designed for standard and heavy duty applications and are made to provide years of maintenance free performance. These doors are perfect for a wide array of applications in commercial, industrial, and institutional buildings. LS Series Doors are available in 18 & 16 GA and can be fire rated up to 3 hours.

CW Series Door Continuously Welded (1 3/4" Thick)

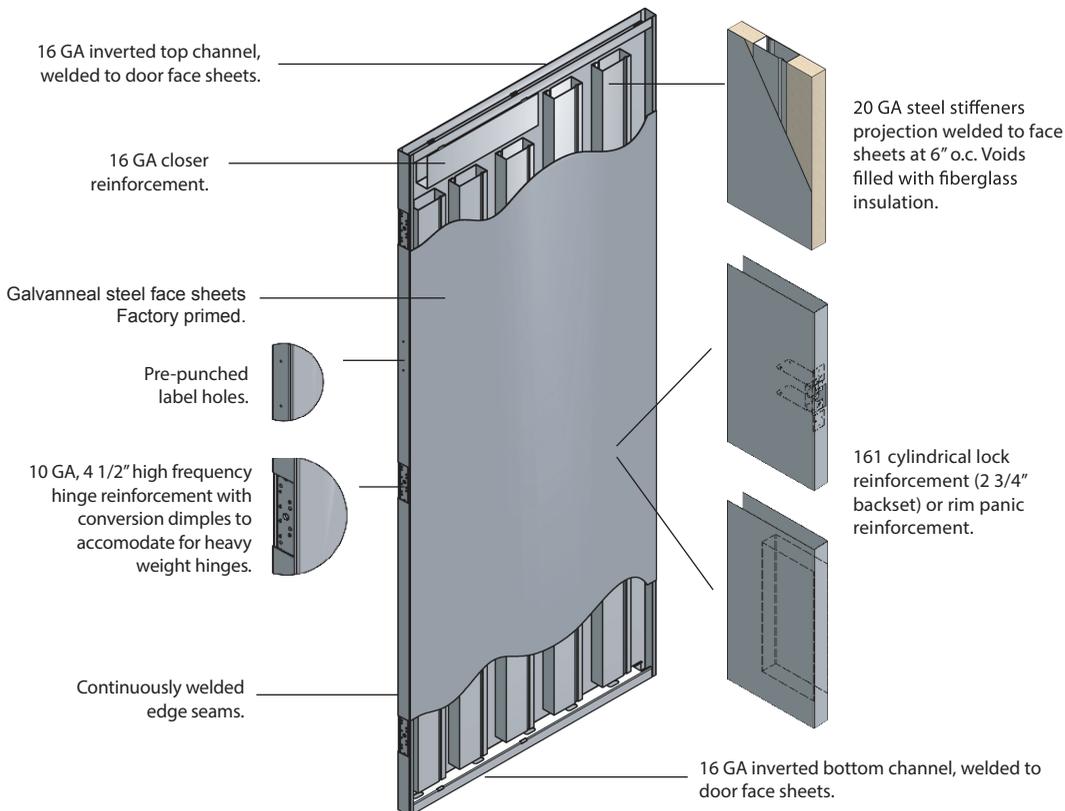

CW Series Doors are constructed with the purpose of providing the ultimate in strength and durability. With steel stiffeners welded to the door face sheets and edge seams continuously welded, CW Series Doors are the perfect solution for high security or high traffic areas such as schools and detention centers. CW Series Doors are available in 16 GA and 14 GA and can be fire rated up to 3 hours.

Finishes and Door Designs


Standard Color Selections

Dunbarton Prefinished Steel Doors and Frames are available in eight standard colors. “Custom color” selections can be matched to ensure the finished product will meet specifications. Dunbarton Steel Doors and Frames are finished in a state-of-the-art paint assembly line with electrostatically-applied, baked-on enamel. Paint finish meets or exceeds 500 hour salt spray test per ASTM-B117-97. Painted finishes also finished 700 hour humidity test per ASTM-D1735-87. Dunbarton Steel Doors & Frames are manufactured with high quality galvaneal zinc coating (A40).

Custom Colors

Dunbarton can match your custom color for Steel Doors & Frames. Custom colors can be matched to you specifications. Contact factory for lead times and pricing.

Standard Color Selections



Rediframe Brown



Ivory



Mojave Brown (option)*



Tan (option)*



Bright White



Light Gray (option)*



Alusteel (option)*



Black (option)*


*Indicates upcharge

Primer Colors



Primer Gray

Available Door Designs

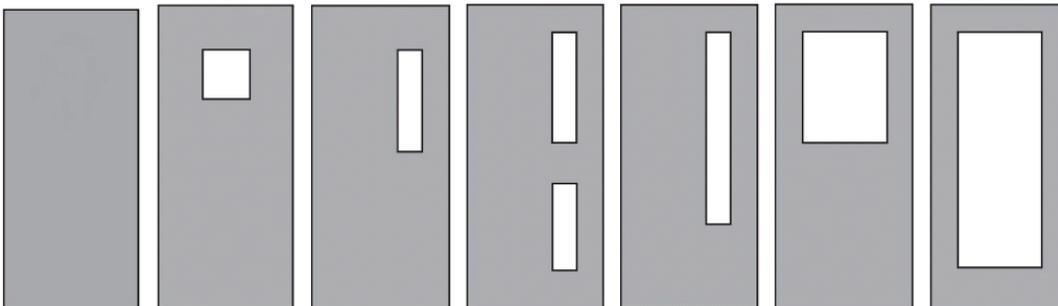

1101 Technology Drive | Dothan, Alabama 36360
800.633.7553 | 334.794.9184 (fax)
www.dunbarton.com | sales@dunbarton.com