


THRU-WALL SCUPPER TRIM RING

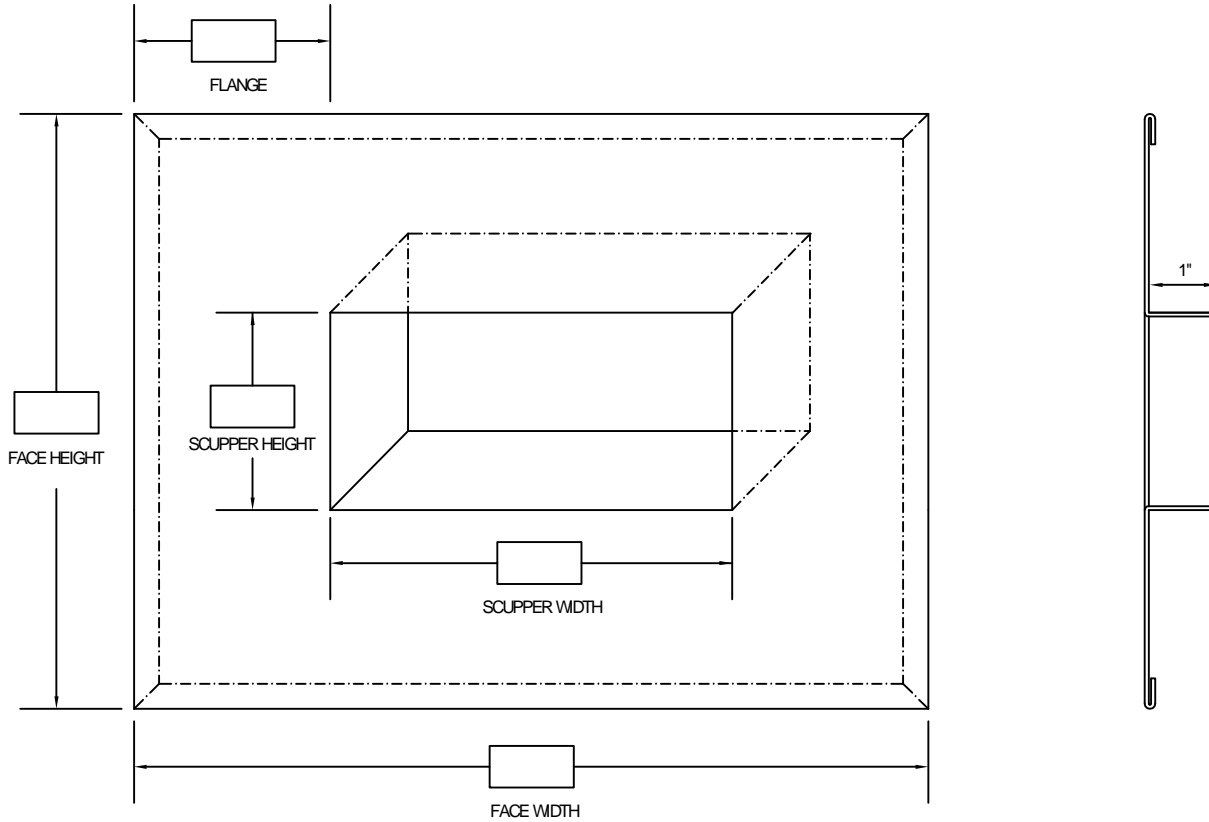

MATERIAL (please choose one):

- | | |
|--|--|
| <input type="checkbox"/> 24 GA Steel | <input type="checkbox"/> .040 Aluminum |
| <input type="checkbox"/> 22 GA Steel | <input type="checkbox"/> .050 Aluminum |
| <input type="checkbox"/> .032 Aluminum | <input type="checkbox"/> .063 Aluminum |

Other: _____
 Color: _____
 Finish: _____

Quantities:

_____ QUANTITY

UNIT Fabrication Requirements:

- | | |
|---|---|
| <input type="checkbox"/> Pop Rivet & Sealed | <input type="checkbox"/> Welded (see note)* |
|---|---|

Installation:
 1) Use roofing manufacturers flange width for roof side to allow proper flashing.
 2) Welded units recommended.
 3) Welded units are post painted finish.

Sheet ___ of ___. DWG# 770-005

Notes:

- *Accessory Welding is only available in 040 aluminum or heavier
- Written approval is required prior to fabrication, contractor is responsible for all dimensions and quantities. Fabricated items are not returnable.

Temple Architectural Products
 638 Moore Rd
 Avon Lake, OH 44012

Phone: (216) 440-3595
 Alternate: (330) 348-3983
 Fax: (440) 653-9883

Project Name: _____

Installing Contractor: _____

Contact Name: _____

Contact number: _____

Signed Approval: _____