




### Tornillo DIN 931 INOXIDABLE A-4..

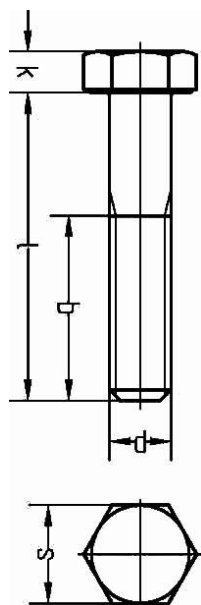

p: Paso de rosca  
k: Altura de cabeza  
s: Ancho de llave  
d: Metrica  
L: Longitud  
b1: L ≤ 125 mm  
b2: 125 mm < L ≤ 200 mm  
b3: L > 200 mm

L (mm)	M-6 Ø	M-8 Ø	M-10 Ø	M-12 Ø	M-14 Ø	M-16 Ø	M-20 Ø	M-24 Ø
40	X	X	X	X				
45	X	X	X	X				
50	X	X	X	X	X			
55	X	X	X	X	X			
60	X	X	X	X	X	X	X	
65	X	X	X	X	X	X	X	
70	X	X	X	X	X	X	X	X
75	X	X	X	X	X	X	X	X
80	X	X	X	X	X	X	X	X
90	X	X	X	X	X	X	X	X
100	X	X	X	X	X	X	X	X
110	X	X	X	X	X	X	X	X
120	X	X	X	X	X	X	X	X
130		X	X	X	X	X	X	X
140		X	X	X	X	X	X	X
150		X	X	X	X	X	X	X
160				X	X	X	X	X
180				X	X	X	X	X
200				X	X	X	X	X
220						X	X	
240						X	X	
260						X	X	
280						X	X	
300						X	X	

d (mm)	b1 (mm)	b2 (mm)	b3 (mm)	k (mm)	s (mm)	p (mm)
M-6	18	24		4	10	1
M-8	22	24		5,3	10	1
M-10	26	28	45	6,4	13	1,25
M-12	30	32	49	7,5	17	1,5
M-14	34	36	53	8,9	19	1,75
M-16	38	44	57	10	22	2
M-20	46	52	65	12,5	30	2
M-24	54	60	73	15	36	3

## DIN 931 INOX A-4


Tornillo de cabeza hexagonal

Rosca parcial

Acero inoxidable

AISI 304 A4

#### GARANTÍA FESIT



Pernos de cabeza hexagonal con rosca parcial.

Norma DIN931/ DIN601

ISO4014 ISO 4016

