



MODEL HR 30 ROTAVATOR[®]

Tillage Widths of 50", 60", 70", 80" & 90"
... for Tractors from 45 H.P. to 85 H.P.

The Model HR 30 ROTAVATOR brings new economy and flexibility to busy tillage operations. Economy because it completes tough tillage jobs in a single pass. Flexibility because it can be used for seedbed preparation, weed control, chopping and mixing crop residues plus chemical incorporation. It also features an exclusive, new depth-control system that streamlines fall-to-spring tillage conversion. Whether you're a general crop farmer, specialty crop grower, nurseryman or landscaper, you can count on the HR 30 ROTAVATOR for reliable tillage performance.




MODEL HR 30 ROTAVATOR

YEAR-ROUND TILLAGE: FASTER AND BETTER

The HR 30 ROTAVATOR turns PTO power into tillage power. Since the rotating blades do the work of a plow, disc and harrow in a single pass, you save tractor fuel and field time. You also conserve your soil.

When used in the fall with the trailing shield raised, the HR 30 leaves large clods to hold winter moisture. At the same time, residues are chopped and blended in to hold topsoil from wind and water erosion.

When spring seedbeds are prepared, the HR 30's trailing shield can be lowered for a perfect, one-pass finish. You can also incorporate chemicals simultaneously for the ultimate in one-step economy.

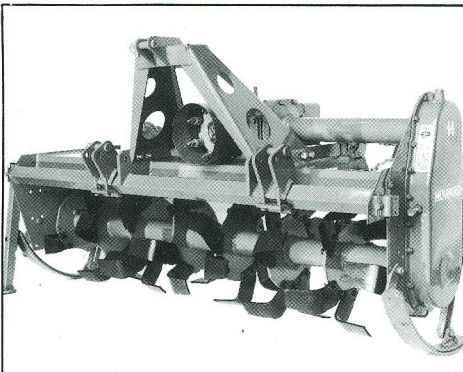

TILTH SELECTION AT YOUR FINGERTIPS

SELECTATILTH lets you match rotor speeds to varying soil, moisture and residue conditions and achieve the exact tilth desired. Changing speeds requires no special tools and takes just minutes.

NEW, EXCLUSIVE DEPTH CONTROL

Converting the 80" and 90" HR 30 from standard depth-control wheels to the optional crumble roller is fast and easy, too. The twin wheels slide out; the full-width roller "plugs-in." Ideal for spring seedbeds, the roller eliminates tractor wheel marks while leveling and slightly firming the soil.

For precise incorporation of chemicals where depth and mix are critical, no other tillage system beats ROTAVATOR accuracy or control.

ROTAVATOR SAVINGS ADD UP... AND UP

The HR 30 saves in four ways:
Saves fuel, because it utilizes the PTO to do a more complete tillage job.

Saves time, because fewer passes are needed.


Saves your tractor. The rotating blades actually help propel it forward rather than creating a drag against it.

Saves your soil. The HR 30 ROTAVATOR minimizes trips and compaction while producing a humus-building blend to improve soil structure and control costly erosion.

MANY MODELS TO CHOOSE FROM

Howard manufactures a full line of ROTAVATORS for all crops and every tillage need. Choose models from 32 inches to 240 inches wide for 10 H.P.

to 250 H.P. tractors. Contact your local Howard dealer or write direct for complete details.

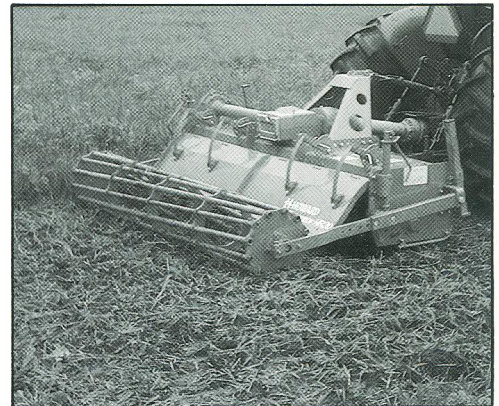

SPECIFICATIONS

Tillage Widths: 50", 60", 70", 80" & 90"

Power Range: For tractors from 45 to 85 H.P. with 540 or 1000 rpm PTO.

Linkage: Category I & II, 3-point hitch.

Tillage Depth: Adjustable to 8" via twin skids standard on 50", 60" & 70" models; L.H., R.H. or twin wheels optional. Twin wheels standard on 80" & 90" models. Crumble roller optional on 70", 80" & 90" models.

Rotor Speeds: 170, 190, 213 & 235 rpm at 540 PTO; 195 & 245 rpm at 1000 PTO. Additional speeds available.

Machine Weights: 50"-940 lbs., 60"-1,020 lbs., 70"-1,100 lbs., 80"-1,350 lbs., 90"-1,420 lbs.

DEALER



Howard Rotavator Company, Inc.
A Member of the Howard Group

102 Howard Ave., P.O. Box 7, Muscoda, Wisconsin 53573 (608) 739-3106
Branch in Sacramento, California 95821 (916) 483-2777

HOWARD®
PARAPLOW®
ROTASPIKE®
ROTAVATOR®
SELECTATILTH®
TURF-QUAKER®
are registered trademarks of HOWARD ROTAVATOR COMPANY.

