



# PRIMARY CEMENTING PRODUCTS



[www.eneroiloffshore.com](http://www.eneroiloffshore.com)





Eneroil welcomes you to its world of precision, quality and service. A world which has existed for the last two decades providing excellence in engineering and continuous improvement in quality of products and processes.


Serving the cause of the global Oil and Gas Industry Eneroil manufactures a wide range of primary cementing equipments confirming to API10D specifications under license from the American Petroleum Institute

Aligning itself with global industry requirements the company strictly adheres to ISO 9001 systems and procedures,

One of the world's leading primary cementing products manufacturer, Eneroil has a state of the art manufacturing plant spread on 150,000 square feet, equipped with fully automatic robotic welding machines, digitally controlled heat treatment facilities, a fully automatic epoxy powder coating plant, mechanical and hydraulic presses up to 300 tonnes, In house engineering design and development department with fully equipped testing facility as per API10D requirement.

We are geared to enhance quality of the products through constant technological up gradation and offering new innovative solutions for our customers' needs. As a result Eneroil has earned a solid reputation for strict adherence to highest quality and on time delivery with its customers.



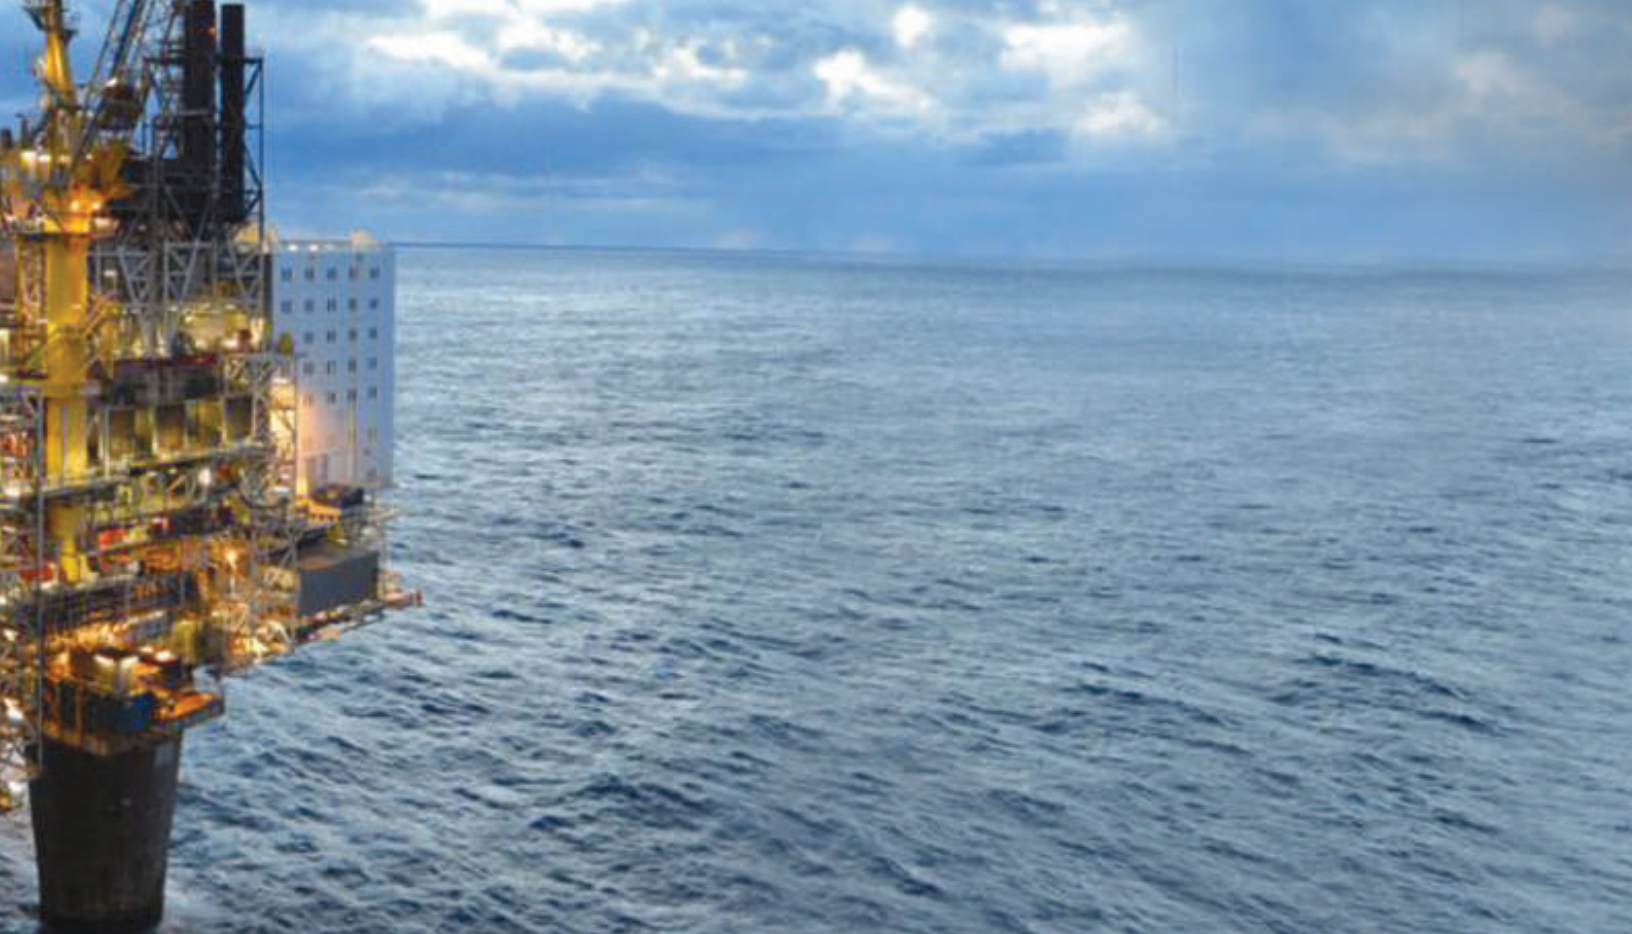


Realizing this into reality is Eneroil arsenal, a team of engineering wizards on site and plant for instant resolution of any customer concern, be it installation or manufacturing.

Facilitating the customer is a comprehensive global network of stockists/ distributor ensuring reliability and convenience. Eneroil clientele across the world's most demanding markets is a testimony to its expertise , knowledge, understanding and efficiency.

## Eneroil Centralizer Software Programme

Cementing products installation design should be based on individual well conditions and operating objectives. Eneroil Centralizer Software programme provides optimum deployment (minimum strategic deployment for maximum output) of cementation products in the well. The Programme works with actual well data, including well profiles and pipe data to calculate down hole forces. It then analyses actual Eneroil Centralizer performance data to determine where to place specific equipment so that a minimum stand off is maintained throughout the string.

The Programme is sophisticated enough to devise a complete equipment installation design by taking pay zone area or other specialized areas into account. While Eneroil Centralizers give perfect bore performance, the Centralizer Software Programme confirms it before application.

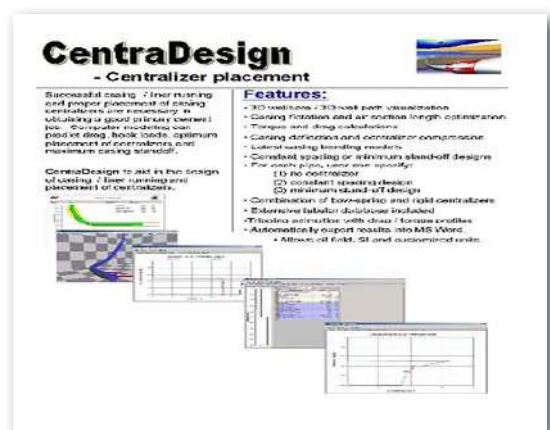

# S 10

## NON WELD BOW CENTRALIZER

Eneroil non weld bow centralizers are used to position the casing in the centre of the well bore in vertically deviated as well as horizontal wells.

The non weld bow centralizers reduce the effect of channeling by improving cement flow. This results in a more uniform thickness between the casing and the wellbore. By reducing the pipe movement before the cement sets in, the centralizers are able to minimize gas channeling. The centralizers provide a semi rigid casing standoff.

Non weld design features self locking of lips for holding bows to end collars. Bows of special alloy steel are hot formed and tempered for optimum strength, resilience and uniformity. They are then flattened as per specifications for consistent performance.

Non weld bow centralizers are available in 2 $\frac{7}{8}$ " to 30"



### Centralizer Bow Configuration & Standard Bow Heights

|     | BST0  | BST 1 | BST 2 | BST 3 | BST4  |
|-----|-------|-------|-------|-------|-------|
| in. | 0.965 | 1.161 | 1.437 | 2.303 | 3.051 |
| mm  | 24.5  | 29.5  | 36.5  | 58.5  | 77.5  |

### Non Weld Bow Centralizer (S 10)

| Casing Size in. | Bow Type | Max. O.D. Size in. | Max. O.D. Size mm | Casing Size in.  | Bow Type | Max. O.D. Size in. | Max. O.D. Size mm | Casing Size in.  | Bow Type | Max. O.D. Size in. | Max. O.D. Size mm |
|-----------------|----------|--------------------|-------------------|------------------|----------|--------------------|-------------------|------------------|----------|--------------------|-------------------|
| 4 $\frac{1}{2}$ | BST - 0  | 6.622              | 168.2             | 7 $\frac{7}{8}$  | BST - 0  | 9.748              | 247.6             | 13 $\frac{3}{8}$ | BST - 0  | 15.561             | 395.4             |
|                 | BST - 1  | 7.015              | 178.2             |                  | BST - 1  | 10.141             | 257.6             |                  | BST - 1  | 15.954             | 405.4             |
|                 | BST - 2  | 7.566              | 192.2             |                  | BST - 2  | 10.692             | 271.6             |                  | BST - 2  | 16.505             | 419.4             |
|                 | BST - 3  | 9.299              | 236.2             |                  | BST - 3  | 12.425             | 315.6             |                  | BST - 3  | 18.238             | 463.4             |
|                 | BST - 4  | 10.795             | 274.2             |                  | BST - 4  | 13.921             | 353.6             |                  | BST - 4  | 19.734             | 501.4             |
| 5               | BST - 0  | 7.126              | 181.0             | 8 $\frac{7}{8}$  | BST - 0  | 10.748             | 273.0             | 16               | BST - 0  | 18.185             | 461.9             |
|                 | BST - 1  | 7.520              | 191.0             |                  | BST - 1  | 11.141             | 283.0             |                  | BST - 1  | 18.578             | 471.9             |
|                 | BST - 2  | 8.071              | 205.0             |                  | BST - 2  | 11.692             | 297.0             |                  | BST - 2  | 19.129             | 485.9             |
|                 | BST - 3  | 9.803              | 249.0             |                  | BST - 3  | 13.425             | 341.0             |                  | BST - 3  | 20.862             | 529.9             |
|                 | BST - 4  | 11.299             | 287.0             |                  | BST - 4  | 14.921             | 379.0             |                  | BST - 4  | 22.358             | 567.9             |
| 5 $\frac{1}{2}$ | BST - 0  | 7.622              | 193.6             | 9 $\frac{7}{8}$  | BST - 0  | 11.748             | 298.4             | 18 $\frac{3}{8}$ | BST - 0  | 20.872             | 530.2             |
|                 | BST - 1  | 8.015              | 203.6             |                  | BST - 1  | 12.142             | 308.4             |                  | BST - 1  | 21.265             | 540.2             |
|                 | BST - 2  | 8.566              | 217.6             |                  | BST - 2  | 12.693             | 322.4             |                  | BST - 2  | 21.816             | 554.2             |
|                 | BST - 3  | 10.299             | 261.6             |                  | BST - 3  | 14.425             | 366.4             |                  | BST - 3  | 23.549             | 598.2             |
|                 | BST - 4  | 11.795             | 299.6             |                  | BST - 4  | 15.921             | 404.4             |                  | BST - 4  | 25.045             | 636.2             |
| 6 $\frac{5}{8}$ | BST - 0  | 8.748              | 222.2             | 10 $\frac{3}{4}$ | BST - 0  | 12.874             | 327.0             | 20               | BST - 0  | 22.248             | 565.1             |
|                 | BST - 1  | 9.141              | 232.2             |                  | BST - 1  | 13.267             | 337.0             |                  | BST - 1  | 22.642             | 575.1             |
|                 | BST - 2  | 9.692              | 246.2             |                  | BST - 2  | 13.818             | 351.0             |                  | BST - 2  | 23.193             | 589.1             |
|                 | BST - 3  | 11.425             | 290.2             |                  | BST - 3  | 15.551             | 395.0             |                  | BST - 3  | 24.925             | 633.1             |
|                 | BST - 4  | 12.921             | 328.2             |                  | BST - 4  | 17.047             | 433.0             |                  | BST - 4  | 26.421             | 671.1             |
| 7               | BST - 0  | 9.124              | 231.8             | 11 $\frac{3}{4}$ | BST - 0  | 13.872             | 352.3             | 24               | BST - 0  | 26.248             | 666.7             |
|                 | BST - 1  | 9.517              | 241.8             |                  | BST - 1  | 14.265             | 362.3             |                  | BST - 1  | 26.642             | 676.7             |
|                 | BST - 2  | 10.068             | 255.8             |                  | BST - 2  | 14.816             | 376.3             |                  | BST - 2  | 27.193             | 690.7             |
|                 | BST - 3  | 11.801             | 299.8             |                  | BST - 3  | 16.549             | 420.3             |                  | BST - 3  | 28.925             | 734.7             |
|                 | BST - 4  | 13.297             | 337.8             |                  | BST - 4  | 18.045             | 458.3             |                  | BST - 4  | 30.421             | 772.7             |

High restoring force combined with low starting force is achieved with all 5 bow heights. Their installation on the casing pipe is very convenient. It requires only the placement of the two assembled halves on the pipe and inserting the pin in the end collar hinge.

The centralizer when unassembled makes a compact package, greatly reducing shipping cost. Assembly at site is conveniently done.

Eneroil offers a wide range of bow heights and shapes enabling the customer to make an optimum choice matching their requirements.

### STARTING FORCE TEST

A new fully assembled centralizer is installed over four equally spaced hinges (C on the inner pipe (A)) as shown in figure 1. The test assembly is held within 5 degrees of the vertical. With the centralizer resting on the edge of the outer pipe B, load is applied on the inner pipe to pull the centralizer into the outer pipe B. Starting force equals the maximum force required to start the centralizer inside pipe B.

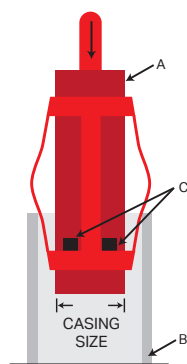


Fig. 1

The starting force should be less than the weight of 40ft. (12.2 mtrs.) of medium weight casing.

### RESTORING FORCE TEST

Restoring force is the force exerted by a centralizer against the casing to keep it away from the bore hole wall. The test is performed with pipe A and pipe B (Fig. 2) within 5 degrees of the horizontal. External force is applied to the outer pipe B which is transferred to the centralizer. Load is then applied and load deflection readings are recorded for 3 times when the minimum restoring force has been obtained. Each spring is tested and the final load deflection curve is prepared using the arithmetic average of the force readings at corresponding deflections. Restoring force is determined from this curve at 67% stand-off ratio. Field experience shows that stand-off values of 75-90% are adequate even in horizontal wells.

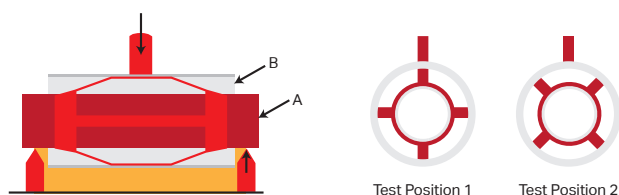


Fig. 2

### Bow-spring Selection Guide Non-weld Centralizers

| Casing Size in. | Bow Type | Preferred Hole Size Combination in. | Casing Size in. | Bow Type | Preferred Hole Size Combination in. |
|-----------------|----------|-------------------------------------|-----------------|----------|-------------------------------------|
| 4½              | BST-0    | 6, 6⅞, 6¼                           | 9⅝              | BST-0    | -                                   |
|                 | BST-1    | -                                   |                 | BST-1    | 11⅜                                 |
|                 | BST-2    | -                                   |                 | BST-2    | 11⅜                                 |
|                 | BST-3    | 7⅞, 8½                              |                 | BST-3    | 11¼, 12¼, 12½, 12⅝                  |
|                 | BST-4    | -                                   |                 | BST-4    | -                                   |
| 5               | BST-0    | 6¼                                  | 10¾             | BST-0    | -                                   |
|                 | BST-1    | 6¾                                  |                 | BST-1    | 12¼                                 |
|                 | BST-2    | -                                   |                 | BST-2    | 12¼, 12½, 12⅝, 13½                  |
|                 | BST-3    | 8½                                  |                 | BST-3    | -                                   |
|                 | BST-4    | 12¼                                 |                 | BST-4    | 14¾                                 |
| 5½              | BST-0    | 6⅝                                  | 11¾             | BST-0    | -                                   |
|                 | BST-1    | -                                   |                 | BST-1    | -                                   |
|                 | BST-2    | 7⅞                                  |                 | BST-2    | -                                   |
|                 | BST-3    | 8⅝, 8½, 8¾                          |                 | BST-3    | -                                   |
|                 | BST-4    | -                                   |                 | BST-4    | -                                   |
| 6⅝              | BST-0    | 7⅞                                  | 13⅝             | BST-0    | -                                   |
|                 | BST-1    | 8½, 8⅝                              |                 | BST-1    | 14¾                                 |
|                 | BST-2    | 8⅝, 8¾                              |                 | BST-2    | -                                   |
|                 | BST-3    | -                                   |                 | BST-3    | 15½, 16                             |
|                 | BST-4    | -                                   |                 | BST-4    | 17½                                 |
| 7               | BST-0    | 8⅝, 8½                              | 16              | BST-0    | -                                   |
|                 | BST-1    | 8½, 8⅝, 8¾                          |                 | BST-1    | 17½                                 |
|                 | BST-2    | 8½, 8⅝, 8¾                          |                 | BST-2    | 18½                                 |
|                 | BST-3    | 9⅞                                  |                 | BST-3    | 18½                                 |
|                 | BST-4    | 12¼                                 |                 | BST-4    | 20, 22                              |
| 7⅝              | BST-0    | -                                   | 18⅝             | BST-0    | -                                   |
|                 | BST-1    | 9½                                  |                 | BST-1    | -                                   |
|                 | BST-2    | -                                   |                 | BST-2    | -                                   |
|                 | BST-3    | -                                   |                 | BST-3    | 22                                  |
|                 | BST-4    | -                                   |                 | BST-4    | 24                                  |
| 8⅝              | BST-0    | 9¾                                  | 20              | BST-0    | -                                   |
|                 | BST-1    | -                                   |                 | BST-1    | -                                   |
|                 | BST-2    | -                                   |                 | BST-2    | -                                   |
|                 | BST-3    | 12¼                                 |                 | BST-3    | -                                   |
|                 | BST-4    | -                                   |                 | BST-4    | 24                                  |

### Performance requirement As per API specification 10D

Force in lbs

| Casing Size in (inches) | API                   |                        |
|-------------------------|-----------------------|------------------------|
|                         | Starting Force (max.) | Restoring Force (min.) |
| 4½                      | 464                   | 464                    |
| 5                       | 520                   | 520                    |
| 5½                      | 620                   | 620                    |
| 6⅝                      | 960                   | 960                    |
| 7                       | 1040                  | 1040                   |
| 7⅝                      | 1056                  | 1056                   |
| 8⅝                      | 1440                  | 1440                   |
| 9⅝                      | 1600                  | 1600                   |
| 10¾                     | 2040                  | 1020                   |
| 11¾                     | 2160                  | 1080                   |
| 13⅝                     | 2440                  | 1220                   |
| 16                      | 2600                  | 1300                   |
| 18⅝                     | 3500                  | 1750                   |
| 20                      | 3760                  | 1880                   |

# S 11

## WELDED STRAIGHT BLADE CENTRALIZER

Eneroil welded straight blade centralizers are high quality welded product which meet or exceed API 10 D specifications. The centralizers have bow springs strongly welded to the end collars under required temperature conditions with correct grade electrode.

Integral hinges folded on the inside stay intact even under extreme stress. The end collars are available in latch-on design with high strength steel locking pin for maximum structural toughness. With a choice of six different bow heights the right combination for casing / open hole configuration can be achieved.

The welded straight blade centralizers are available in 2 7/8" to 30"



Welded Straight Blade Centralizer (S 11)

| Casing Size in. | Bow Type | Max. O.D. Size in. | Max. O.D. Size mm | Casing Size in. | Bow Type | Max. O.D. Size in. | Max. O.D. Size mm | Casing Size in. | Bow Type | Max. O.D. Size in. | Max. O.D. Size mm | Casing Size in. | Bow Type | Max. O.D. Size in. | Max. O.D. Size mm |       |
|-----------------|----------|--------------------|-------------------|-----------------|----------|--------------------|-------------------|-----------------|----------|--------------------|-------------------|-----------------|----------|--------------------|-------------------|-------|
| 4 1/2           | WST-00   | 6.240              | 158.5             | 7               | WST-00   | 8.740              | 222.0             | 10 3/4          | WST-00   | 12.488             | 317.2             | 18 5/8          | WST-00   | 20.492             | 520.5             |       |
|                 | WST-0    | 7.362              | 187.0             |                 | WST-0    | 9.862              | 250.5             |                 | WST-0    | 13.610             | 345.7             |                 | WST-0    | 21.614             | 549.0             |       |
|                 | WST-1    | 7.736              | 196.5             |                 | WST-1    | 10.236             | 260.0             |                 | WST-1    | 13.984             | 355.2             |                 | WST-1    | 21.988             | 558.5             |       |
|                 | WST-2    | 8.110              | 206.0             |                 | WST-2    | 10.610             | 269.5             |                 | WST-2    | 14.358             | 364.7             |                 | WST-2    | 22.362             | 568.0             |       |
|                 | WST-3    | 9.232              | 234.5             |                 | WST-3    | 11.732             | 298.0             |                 | WST-3    | 15.480             | 393.2             |                 | WST-3    | 23.484             | 596.5             |       |
|                 | WST-4    | 11.476             | 291.5             |                 | WST-4    | 13.976             | 355.0             |                 | WST-4    | 17.724             | 450.2             |                 | WST-4    | 25.728             | 653.5             |       |
| 5               | WST-5    | 14.488             | 368.0             | WST-5           | 16.988   | 431.5              | WST-5             | 20.736          | 526.7    | WST-5              | 28.740            | 730.0           | 20       | WST-00             | 21.866            | 555.4 |
|                 | WST-00   | 6.740              | 171.2             | WST-00          | 9.366    | 237.9              | WST-00            | 13.488          | 342.6    | WST-00             | 21.866            | 555.4           |          |                    |                   |       |
|                 | WST-0    | 7.862              | 199.7             | WST-0           | 10.488   | 266.4              | WST-0             | 14.610          | 371.1    | WST-0              | 22.988            | 583.9           |          |                    |                   |       |
|                 | WST-1    | 8.236              | 209.2             | WST-1           | 10.862   | 275.9              | WST-1             | 14.984          | 380.6    | WST-1              | 23.362            | 593.4           |          |                    |                   |       |
|                 | WST-2    | 8.610              | 218.7             | WST-2           | 11.236   | 285.4              | WST-2             | 15.358          | 390.1    | WST-2              | 23.736            | 602.9           |          |                    |                   |       |
|                 | WST-3    | 9.732              | 247.2             | WST-3           | 12.358   | 313.9              | WST-3             | 16.480          | 418.6    | WST-3              | 24.858            | 631.4           |          |                    |                   |       |
| 5 1/2           | WST-4    | 11.976             | 304.2             | WST-4           | 14.602   | 370.9              | WST-4             | 18.724          | 475.6    | WST-4              | 27.102            | 688.4           | 24       | WST-4              | 27.102            | 688.4 |
|                 | WST-5    | 14.988             | 380.7             | WST-5           | 17.614   | 447.4              | WST-5             | 21.736          | 552.1    | WST-5              | 30.114            | 764.9           |          |                    |                   |       |
|                 | WST-00   | 7.240              | 183.9             | WST-00          | 10.366   | 263.3              | WST-00            | 15.177          | 385.5    | WST-00             | 25.866            | 657.0           |          |                    |                   |       |
|                 | WST-0    | 8.362              | 212.4             | WST-0           | 11.488   | 291.8              | WST-0             | 16.299          | 414.0    | WST-0              | 26.988            | 685.5           |          |                    |                   |       |
|                 | WST-1    | 8.736              | 221.9             | WST-1           | 11.862   | 301.3              | WST-1             | 16.673          | 423.5    | WST-1              | 27.362            | 695.0           |          |                    |                   |       |
|                 | WST-2    | 9.110              | 231.4             | WST-2           | 12.236   | 310.8              | WST-2             | 17.047          | 433.0    | WST-2              | 27.736            | 704.5           |          |                    |                   |       |
| 6               | WST-3    | 10.232             | 259.9             | WST-3           | 13.358   | 339.3              | WST-3             | 18.169          | 461.5    | WST-3              | 28.858            | 733.0           | 30       | WST-3              | 28.858            | 733.0 |
|                 | WST-4    | 12.476             | 316.9             | WST-4           | 15.602   | 396.3              | WST-4             | 20.413          | 518.5    | WST-4              | 31.102            | 790.0           |          |                    |                   |       |
|                 | WST-5    | 15.488             | 393.4             | WST-5           | 18.614   | 472.8              | WST-5             | 23.425          | 595.0    | WST-5              | 34.114            | 866.5           |          |                    |                   |       |
|                 | WST-00   | 8.366              | 212.5             | WST-00          | 11.366   | 288.7              | WST-00            | 17.803          | 452.2    | WST-00             | 31.866            | 809.4           |          |                    |                   |       |
|                 | WST-0    | 9.488              | 241.0             | WST-0           | 12.488   | 317.2              | WST-0             | 18.925          | 480.7    | WST-0              | 22.988            | 583.9           |          |                    |                   |       |
|                 | WST-1    | 9.862              | 250.5             | WST-1           | 12.862   | 326.7              | WST-1             | 19.299          | 490.2    | WST-1              | 23.362            | 593.4           |          |                    |                   |       |
| 6 1/2           | WST-2    | 10.236             | 260.0             | WST-2           | 13.236   | 336.2              | WST-2             | 19.673          | 499.7    | WST-2              | 23.736            | 602.9           | 30       | WST-2              | 23.736            | 602.9 |
|                 | WST-3    | 11.358             | 288.5             | WST-3           | 14.358   | 364.7              | WST-3             | 20.795          | 528.2    | WST-3              | 24.858            | 631.4           |          |                    |                   |       |
|                 | WST-4    | 13.602             | 345.5             | WST-4           | 16.602   | 421.7              | WST-4             | 23.039          | 585.2    | WST-4              | 27.102            | 688.4           |          |                    |                   |       |
|                 | WST-5    | 16.614             | 422.0             | WST-5           | 19.614   | 498.2              | WST-5             | 26.051          | 661.7    | WST-5              | 30.114            | 764.9           |          |                    |                   |       |

# S 12

## SINGLE PIECE GLIDER CENTRALIZER

Eneroil offshore has developed its single piece glider centralizer (S12) model to meet growing demands worldwide for a Centralizer which can perform satisfactorily in Open hole as well as Cased hole.

These are high quality product, developed to meet and exceed API 10D specifications for use in highly demanding downhole conditions like ERD wells.

Eneroil's single piece glider centralizer (S 12) combines the highest restoring force with zero starting force and zero running force thus minimising drag during running of the casing. S 12 centralizer is used to position the casing in the centre of the wellbore in vertical deviated and horizontal wells.

S12 Centralizers reduce the effect of channeling by improving the cement flow, this results in more uniform cement thickness in the wellbore. By reducing the pipe movement before cement sets in S12 Centralizers are able to minimize gas channeling.

Eneroil's S12 Centralizers are one piece construction in special high strength steel which imparts excellent hardness and spring action ensuring an unmatched ability to come back to its original shape after undergoing rigorous stress loads conditions, these centralizers can pass through highly constricted space and then again regain their original shape without any deformity to give excellent standoff in open hole area.

Its bow spring design makes it highly flexible and its single piece construction makes it structurally robust and gives extra strength to withstand high stress conditions in demanding downhole situations making it the most preferred choice of cementers.



Single Piece Glider Centralizer (S 12)

| Casing Size | Hole Size | ID in inches | ID in mm | OD in inches | OD in mm | Height in mm | Number of Bow | Starting Force (max.) As per API-10D | Starting Force Observed | Restoring Force (min.) As per API-10D | Restoring Force Observed |
|-------------|-----------|--------------|----------|--------------|----------|--------------|---------------|--------------------------------------|-------------------------|---------------------------------------|--------------------------|
| 4½"         | 6"        | 4¾"          | 117.5    | 6"           | 152.4    | 317.5        | 4             | 211 Kgf. (464 lbf.)                  | 0                       | 211 Kgf. (464 lbf.)                   | 1972 lbf.                |
| 5½"         | 8½"       | 5¾"          | 142.9    | 8½"          | 215.9    | 317.5        | 6             | 281 Kgf. (620 lbf.)                  | 0                       | 281 Kgf. (620 lbf.)                   | 1568 lbf.                |
| 7"          | 8½"       | 7⅞"          | 181.0    | 8 ½"         | 215.9    | 368.3        | 6             | 472 Kgf. (1040 lbf.)                 | 0                       | 472 Kgf. (1040 lbf.)                  | 1727 lbf.                |
| 7¾"         | 8½"       | 7¾"          | 196.9    | 8 ½"         | 215.9    | 368.3        | 6             | 479.4 Kgf. (1056 lbf.)               | 0                       | 479.4 Kgf. (1056 lbf.)                | 1856 lbf.                |
| 9¾"         | 12¼"      | 9¾"          | 247.7    | 12¼"         | 311.2    | 457.2        | 6             | 726 Kgf. (1600 lbf.)                 | 0                       | 726 Kgf. (1600 lbf.)                  | 2946 lbf.                |
| 13¾"        | 17½"      | 13⅝"         | 344.5    | 17½"         | 444.5    | 457.2        | 8             | 1107 Kgf. (2440 lbf.)                | 0                       | 553.5 Kgf. (1220 lbf.)                | 2140 lbf.                |

# S 20

## NON WELD POSITIVE CENTRALIZER

Available in the size range 4½" to 20", these centralizers are uniquely designed with flat bottom U profile of different depths permitting maximum fluid passage.

Available with straight bows for casing operations, this device provides nearly 100% stand-off (Concentricity) when run inside a case hole. The self locking design ensures firm hold. Its non-welded structure, eliminates brittle spots and enhances durability.

Eneroil non weld positive centralizer significantly reduce frictional drag while being used in deviated holes. They are supplied ¼"/6mm less than the inside diameter of the casing or hole size in which the centralizer is to be run.



Non Weld Positive Centralizer (S 20)

| Casing size | BOW TYPE / MAXIMUM O.D. |       |        |       |        |       |        |       |        |       |        |       |        |       |        |       |        |       |        |       |
|-------------|-------------------------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|
|             | P-1                     |       | P-2    |       | P-3    |       | P-4    |       | P-5    |       | P-6    |       | P-7    |       | P-8    |       | P-9    |       | P-10   |       |
| in.         | in                      | mm    | in     | mm    | in     | mm    | in     | mm    | in     | mm    | in     | mm    | in     | mm    | in     | mm    | in     | mm    | in     | mm    |
| 4½          | 5.874                   | 149.2 | 6.252  | 158.8 | 6.626  | 168.3 | 6.875  | 174.6 | 7.213  | 183.2 | 7.606  | 193.2 | 8.000  | 203.2 | 8.394  | 213.2 | 8.787  | 223.2 | 9.024  | 229.2 |
| 5           | 6.374                   | 161.9 | 6.768  | 171.9 | 7.161  | 181.9 | 7.398  | 187.9 | 7.713  | 195.9 | 8.106  | 205.9 | 8.500  | 215.9 | 8.894  | 225.9 | 9.075  | 233.2 | 9.492  | 241.9 |
| 5½          | 6.874                   | 174.6 | 7.252  | 184.2 | 7.661  | 194.6 | 7.898  | 200.6 | 8.213  | 208.6 | 8.606  | 218.6 | 9.000  | 228.6 | 9.394  | 238.6 | 9.787  | 248.6 | 10.024 | 254.6 |
| 6%          | 8.000                   | 203.2 | 8.394  | 213.2 | 8.787  | 223.2 | 9.024  | 229.2 | 9.339  | 237.2 | 9.732  | 247.2 | 10.126 | 257.2 | 10.520 | 267.2 | 10.914 | 277.2 | 11.308 | 287.2 |
| 7           | 8.374                   | 212.7 | 8.768  | 222.7 | 9.161  | 232.7 | 9.398  | 238.7 | 9.713  | 246.7 | 10.106 | 256.7 | 10.500 | 266.7 | 10.894 | 276.7 | 11.287 | 286.7 | 11.681 | 296.7 |
| 7%          | 9.000                   | 228.6 | 9.394  | 238.6 | 9.787  | 248.6 | 10.024 | 254.6 | 10.339 | 262.6 | 10.732 | 272.6 | 11.126 | 282.6 | 11.520 | 292.6 | 11.914 | 302.6 | 12.308 | 312.6 |
| 8%          | 10.000                  | 254.0 | 10.394 | 264.0 | 10.787 | 274.0 | 11.024 | 280.0 | 11.339 | 288.0 | 11.732 | 298.0 | 12.126 | 308.0 | 12.520 | 318.0 | 12.914 | 328.0 | 13.308 | 338.0 |
| 9%          | 11.000                  | 279.4 | 11.394 | 289.4 | 11.787 | 299.4 | 12.024 | 305.4 | 12.339 | 313.4 | 12.732 | 323.4 | 13.126 | 333.4 | 13.520 | 343.4 | 13.914 | 353.4 | 14.308 | 363.4 |
| 10%         | 12.126                  | 308.0 | 12.520 | 318.0 | 12.913 | 328.0 | 13.150 | 334.0 | 13.465 | 342.0 | 13.858 | 352.0 | 14.252 | 362.0 | 14.646 | 372.0 | 15.039 | 382.0 | 15.427 | 392.0 |
| 11%         | 13.126                  | 333.4 | 13.520 | 343.4 | 13.913 | 353.4 | 14.150 | 359.4 | 14.465 | 367.4 | 14.858 | 377.4 | 15.252 | 387.4 | 15.646 | 397.4 | 16.039 | 407.4 | 16.427 | 417.4 |
| 13%         | 14.811                  | 376.2 | 15.205 | 386.2 | 15.598 | 396.2 | 15.835 | 402.2 | 16.150 | 410.2 | 16.543 | 420.2 | 16.937 | 430.2 | 17.331 | 440.2 | 17.714 | 450.2 | 18.098 | 460.2 |
| 16          | 17.437                  | 442.9 | 17.831 | 452.9 | 18.224 | 462.9 | 18.461 | 468.9 | 18.776 | 476.9 | 19.169 | 486.9 | 19.563 | 496.9 | 19.957 | 506.9 | 20.349 | 516.9 | 20.732 | 526.9 |
| 18%         | 20.126                  | 511.2 | 20.520 | 521.2 | 20.913 | 531.2 | 21.150 | 537.2 | 21.465 | 545.2 | 21.858 | 555.2 | 22.252 | 565.2 | 22.646 | 575.2 | 23.039 | 585.2 | 23.427 | 595.2 |
| 20          | 21.500                  | 546.1 | 21.894 | 556.1 | 22.287 | 566.1 | 22.524 | 572.1 | 22.839 | 580.1 | 23.232 | 590.1 | 23.626 | 600.1 | 24.020 | 610.1 | 24.407 | 620.1 | 24.791 | 630.1 |
| 24          | 25.500                  | 647.7 | 25.894 | 657.7 | 26.287 | 667.7 | 26.524 | 673.7 | 26.839 | 681.7 | 27.232 | 691.7 | 27.626 | 701.7 | 28.020 | 711.7 | 28.407 | 721.7 | 28.791 | 731.7 |



## S 29

### SEMI-RIGID BOW CENTRALIZER

Available in the size range 2 $\frac{7}{8}$ " to 20", this device ensures high efficiency in casing jobs on deviated and horizontal wells. Combining the features of a standard spring bow and rigid centralizer, it has bows manufactured from alloy steel tempered for exact hardness and a non-weld design to eliminate brittle spots.

The spring characteristics of its double crested profile permit compression to facilitate movement through tight spots and dog legs. Compared to other Spring Bow Centralizers this device attains higher stand-off because of its higher restoring force.



## S 32

### NON-WELD CENTRALIZER WITH TURBO FINS

Available in the size range 4 $\frac{1}{2}$ " to 20", this sturdy non-weld device induces a spiral flow pattern in the slurry thereby increasing displacement efficiency. Fitted with specially designed multi-direction turbo fins made of alloy steel in annealed state this device improves the cleaning action of drilling fluids, distributes the cement slurry into wellbore irregularities and minimizes channeling.

Installation of Non weld Centralizer with Turbofin on the casing pipe is very convenient. It requires only the placement of two assembled halves on the pipe and inserting the pin in the end collar hinge.

## S 24 / S 26 / S 28

### STRAIGHT BLADE SOLID CENTRALIZER

Eneroil straight blade solid centralizers provide the right features for getting a good primary cementing job with maximum casing/ wellbore stand off. Eneroil straight blade solid centralizers are constructed of one piece steel alloy (S 24) high strength corrosion resistant cast aluminium (S 28) and also non sparking zinc alloy (S26). Eneroil straight blade solid centralizers provide ultimate drag and torque reduction with maximum fluid bypass. With low friction factor Eneroil straight blade solid centralizers withstand high wellbore temperatures while providing maximum horizontal standoff.

Eneroil centralizers are wellhead friendly and have high impact with shock resistance, along with optimum tensile and yield strength.



## S 23 / S 25 / S 27

### SPIRAL BLADE SOLID CENTRALIZER

Eneroil Spiral Blade Solid Centralizers were developed in response to the need for better cementing in highly deviated and horizontal wells. Eneroil Spiral Blade Solid Centralizers are designed to provide optimum flow area. The 360 degrees overlapping solid vane provide maximum wall contact and fluid swirl. Reduced flow area between the spiral blades produces a vortex motion of the fluids for more fluid velocity with direction.

Eneroil Spiral blade Solid Centralizer is made of steel (S 23), high strength corrosion resistant cast aluminium (S 27) and also non sparking zinc alloy (S 25). The 30° slope of the vane end reduce drag and aids the casing in reaching TD. This gentle flow from the body to the height of the vane will eliminate scraping, gouging or digging into the formation and consequently reduce balling between the vanes. Eneroil Spiral Blade Solid Centralizer has high impact and shock resistance combined with tensile and yield strength as well as resists corrosion.

Straight / Spiral Blade Centralizer (S 23 - S28)

| Casing Size | Hole Size | Nominal OD | Height (Straight) | Height (Spiral) | Number of Vanes |
|-------------|-----------|------------|-------------------|-----------------|-----------------|
| in          | in        | in         | in                | in              |                 |
| 3½          | 4½        | 4¼         | 6                 | 6               | 4               |
| 4½          | 6¼        | 6          | 6                 | 6               | 4               |
| 5           | 6⅝        | 5⅞         | 8                 | 8               | 4               |
| 5           | 8½        | 8¼         | 8                 | 8               | 4               |
| 5½          | 6½        | 6¼         | 8                 | 8               | 4               |
| 5½          | 8½        | 8¼         | 8                 | 8               | 4               |
| 7           | 8½        | 8¼         | 8                 | 8               | 6               |
| 7⅝          | 9⅞        | 9⅝         | 8                 | 8               | 6               |
| 9⅝          | 12¼       | 12         | 10                | 10              | 6               |
| 10¾         | 14¾       | 14½        | 10                | 10              | 8               |
| 11¾         | 14¾       | 14½        | 10                | 10              | 8               |
| 13⅝         | 17½       | 17¼        | 10                | 10              | 8               |

Available in Left or Right Hand Spirals

## S 36 SPIRASLIDER

Eneroil Spiraslider is designed specifically for highly deviated or horizontal wells. The steel construction ensures extra strength and superior toughness. The design of the blades provide minimum friction reducing drag forces while running in the pipe.

The Spirasliders are available in spiral and straight blades which resist high side loads. While giving maximum standoff the blades create vortex flow to optimize mud displacement. The centralizers are available in 4½" to 13¾".



## S 38 HEAVY DUTY SPIRASLIDER

Eneroil Heavy Duty Spiraslider Centralizer (S 38) is designed to allow for optimal mud displacement for vertical, inclined and horizontal wells. The complete system consists of heavy duty spiraslider and two beveled stop collars shaped to minimize running resistance. Heavy duty spiraslider has special rounded blades which reduce sliding friction of the casing while the special stop collar performs as a positioning device.

Heavy duty spirasliders are recommended when extremely high axial loads are anticipated. Heavy duty spiraslider design provides a bearing surface for lower drag forces, which requires less rotating torque than conventional centralizers enhancing rotation and running efficiency. Specially designed spiral blades minimize drag forces while running of the casing.

These fins glide smoothly in the low side of the borehole wall. Wide symmetrical fins, beveled smooth at both ends, glide easily over restrictions. Heavy duty spiraslider are manufactured using laser cutting of the fins and advanced robotic welding which ensures that each centralizers gives extremely robust performance under the most demanding well conditions,

Heavy duty spiraslider has unique spiral blade shape which allows for optimal mud displacement during the cementing process.

Spiraslider (S 36)

| Casing Size | Hole Size | Nominal Outer Diameter |        | Height | Number of Vanes |
|-------------|-----------|------------------------|--------|--------|-----------------|
|             |           | mm                     | in     |        |                 |
| 4½          | 6         | 146.1                  | 5.750  | 12     | 4               |
| 4½          | 8½        | 206.4                  | 8.125  | 12     | 4               |
| 4½          | 8¾        | 209.6                  | 8.250  | 12     | 4               |
| 5           | 6         | 146.1                  | 5.750  | 12     | 4               |
| 5½          | 8½        | 206.4                  | 8.125  | 12     | 4               |
| 5½          | 8¾        | 209.6                  | 8.250  | 12     | 4               |
| 7           | 8½        | 206.4                  | 8.125  | 12     | 6               |
| 7           | 8¾        | 209.6                  | 8.250  | 12     | 6               |
| 9¾          | 12¼       | 304.8                  | 12.000 | 12     | 7               |
| 13¾         | 16        | 400.1                  | 15.750 | 12     | 8               |
| 13¾         | 17½       | 438.2                  | 17.250 | 12     | 8               |

Heavy Duty Spiraslider (S 38)

| Casing Size | Hole Size | Nominal Outer Diameter |        | Height | Number of Vanes |
|-------------|-----------|------------------------|--------|--------|-----------------|
|             |           | mm                     | in     |        |                 |
| 4½          | 6         | 146.1                  | 5.750  | 12     | 4               |
| 4½          | 8½        | 206.4                  | 8.125  | 12     | 4               |
| 4½          | 8¾        | 209.6                  | 8.250  | 12     | 4               |
| 5           | 6         | 146.1                  | 5.750  | 12     | 4               |
| 5½          | 8½        | 206.4                  | 8.125  | 12     | 4               |
| 5½          | 8¾        | 209.6                  | 8.250  | 12     | 4               |
| 7           | 8½        | 206.4                  | 8.125  | 12     | 6               |
| 7           | 8¾        | 209.6                  | 8.250  | 12     | 6               |
| 9¾          | 12¼       | 304.8                  | 12.000 | 12     | 7               |
| 13¾         | 16        | 400.1                  | 15.750 | 12     | 8               |
| 13¾         | 17½       | 438.2                  | 17.250 | 12     | 8               |

## S 60

### HINGED BOLTED STOP COLLAR



An economical collar suitable for subcritical annular tolerances. Available in the size range 3½" to 20", it has a cross bolt design which makes it an efficient and user friendly device.

## S 61

### HINGED SPIRAL NAIL STOP COLLAR



Available in the size range 3½" to 13¾", this device can be used in both upset and non-upset casing to provide maximum clearance during rotation.

It has a groove in the middle into which a spiral nail can be driven for improved grip on the casing. The broader band firmly grips the collar into position around the casing.

## S 62

### HINGED SPIRAL NAIL STOP COLLAR



Available in the size range 3½" to 20", this device can be used in both upset and non-upset casing to provide maximum clearance during rotation. It has a groove in the middle into which a spiral nail can be driven for improved grip on the casing.

## S 63

### STOP COLLAR WITH SET SCREW



Available in the size range 3½" to 20", this device has a high cost-utility ratio. This hinged collar with a row of set screws positions easily and firmly around the casing.

## S 40

### SLIP-ON STAND-OFF BAND




Stand off band is designed specifically for highly deviated or horizontal wells. Blades are formed by pressing on the sleeve. The steel construction ensures extra strength and superior toughness.

The stand off bands are available in 4½" to 13¾". The Stand off band are available in straight / spiral blades which resist high side loads and increases flow to optimize mud displacement.

## S 70

### WIRE BRISTLE SCRATCHER



Consists of a hinged collar radiating into bristles. Each bristle is made of hardened & tempered wire with two scratching elements.

Available in the size range 4½" to 20" these scratchers improve the cement bond between the casing and porous formations while reinforcing the cement column.

# S 65

## SLIP-ON STOP COLLAR WITH SET SCREWS ON ONE SIDE BEVELED



This slip-on set screw device is recommended for small hole operations. Available in size 3½" to 20" beveled one side, and is gripped by a row of screws. This is a heavy duty device.

### Stop Collars (S 60, S 61, S 62, S 63, S 65)

| Size | Hinged Bolted |     | Hinged Spiral |     | Hinged Set. Screw |     | Slip on with set screw |     | Size | Hinged Bolted |     | Hinged Spiral |     | Hinged Set. Screw |     | Slip on with set screw |     |
|------|---------------|-----|---------------|-----|-------------------|-----|------------------------|-----|------|---------------|-----|---------------|-----|-------------------|-----|------------------------|-----|
|      | S-60          |     | S-61/S-62     |     | S-63              |     | S-65                   |     |      | S-60          |     | S-61/S-62     |     | S-63              |     | S-65                   |     |
|      | Max. O.D.     |     | Max. O.D.     |     | Max. O.D.         |     | Max. O.D.              |     |      | Max. O.D.     |     | Max. O.D.     |     | Max. O.D.         |     | Max. O.D.              |     |
| in.  | in            | mm  | in            | mm  | in                | mm  | in                     | mm  | in.  | in            | mm  | in            | mm  | in                | mm  | in                     | mm  |
| 3½   | 4.843         | 123 | 4.803         | 122 | 4.882             | 124 | 4.213                  | 107 | 9%   | 10.945        | 278 | 11.102        | 282 | 11.024            | 280 | 10.343                 | 262 |
| 4½   | 5.827         | 148 | 5.827         | 148 | 5.866             | 149 | 5.217                  | 132 | 10%  | 12.087        | 307 | 12.165        | 309 | 12.126            | 308 | 11.469                 | 291 |
| 5    | 6.339         | 161 | 6.378         | 162 | 6.339             | 161 | 5.717                  | 145 | 11%  | 13.071        | 332 | 13.189        | 335 | 13.110            | 333 | 12.469                 | 316 |
| 5½   | 6.890         | 175 | 6.850         | 174 | 6.850             | 174 | 6.217                  | 157 | 13%  | 14.803        | 376 | 14.961        | 380 | 14.843            | 377 | 14.091                 | 357 |
| 6%   | 7.953         | 202 | 7.992         | 203 | 7.992             | 203 | 7.343                  | 186 | 13%  | 17.441        | 443 | 17.480        | 444 | 17.441            | 443 | 14.406                 | 365 |
| 7    | 8.425         | 214 | 8.425         | 214 | 8.425             | 214 | 7.717                  | 196 | 18%  | 20.079        | 510 | 20.118        | 511 | 20.118            | 511 | 19.469                 | 494 |
| 7%   | 8.976         | 228 | 9.094         | 231 | 8.976             | 228 | 8.343                  | 211 | 20   | 21.457        | 545 | 21.496        | 546 | 21.496            | 546 | 20.843                 | 529 |
| 8%   | 9.961         | 253 | 10.000        | 254 | 10.000            | 254 | 9.343                  | 237 |      |               |     |               |     |                   |     |                        |     |

# S 80

## WELLBORE WIPER



Consisting of loop wire cables of tempered steel laced into a collar, these wipers clean the well bore efficiently by permitting removed filter cake to pass, there by providing excellent reinforcement to the cement column especially under close spacing. Available in size range 4½" to 20"

# S 90

## CEMENT BASKET




Available in the size range 4½' to 30", this device consists of flexible steel spring bows welded to slip-on collars. Bows are hardened and tempered for maximum strength and uniformity.


It is run on casing or liners above weak or porous formations to provide protection from hydrostatic pressure generated by the cement column. Its overlapping metal fins provide flexibility and fluid passage while maintaining optimum support characteristics.

# INSTALLATION PROCEDURE


The four methods of Centralizer installation are illustrated below

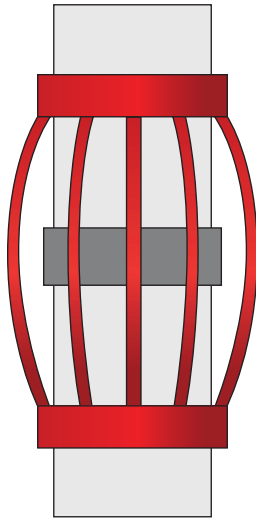


Over Stop Collar

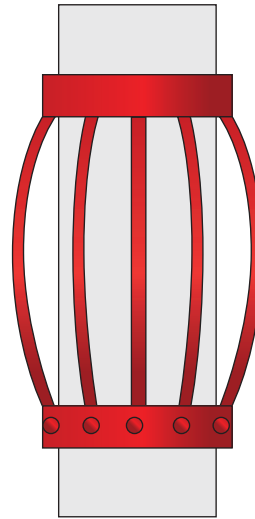

Integral Stop  
(Set Crews)

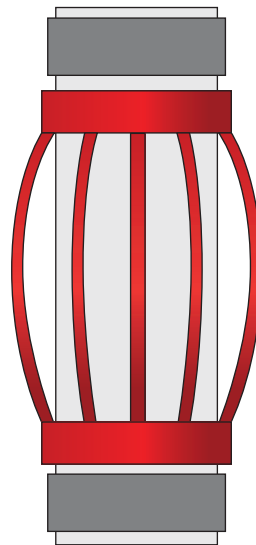

Between Stop Collar

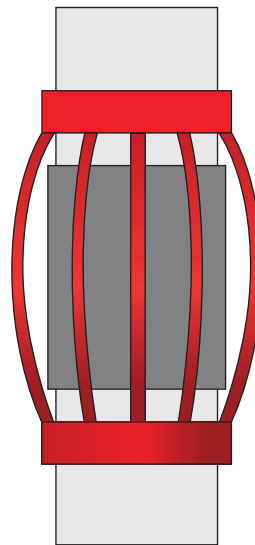

Over Casing Coupling





**CORPORATE OFFICE**

301-304, Block-1, DLF Corporate Park, M.G. Road,  
DLF Phase-3, Gurgaon, Haryana - 122 002, India,

Tel. : +91 - 124 - 4023550

Fax : +91 - 124 - 4023551

Email : [sales@eneroiloffshore.com](mailto:sales@eneroiloffshore.com)

Website : [www.eneroiloffshore.com](http://www.eneroiloffshore.com)