BT-50 Micro-Nano Bubble Nozzle

Simple yet effective Micro-Nano Bubble device for various applications like DAF, aquaculture, hydroponics etc.

Retail Price: \$250 (ABS), \$525 (PVDF) Please ask for quantity, distribution partner and OEM pricing.




5.28 GPM

Pump Pressure


0.25 Mpa 36 psi 0.3 Mpa

43.5 psi

Air Flow Rate	
0.18-0.9l/m	-
0.2-1l/m	
	0.18-0.9l/m




BT-50 Pressure vs Water flow rate

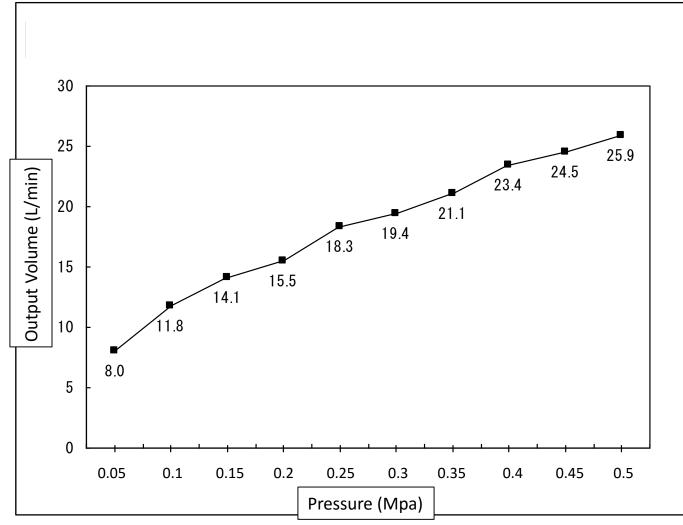

Riverforest Corporation

BT-50 Pressure vs Water flow rate

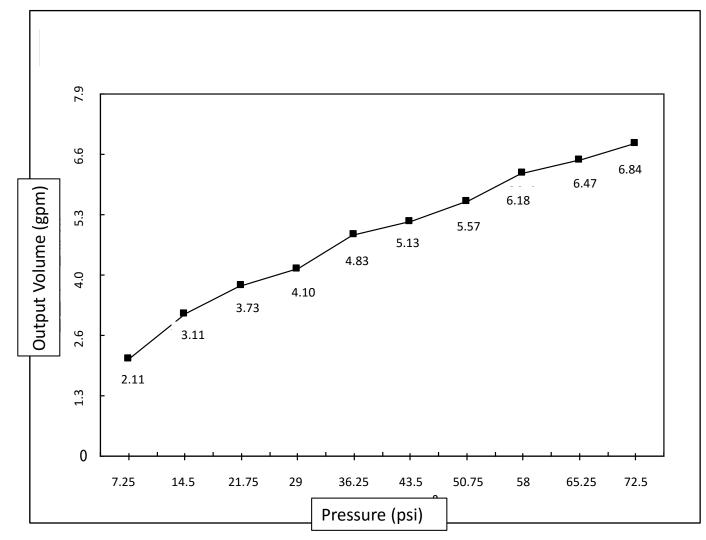



2/1/2016

BT50 Connecting diagram


1. Using gas aspiration tube attached to the body

2. Using negative pressure at pump inlet

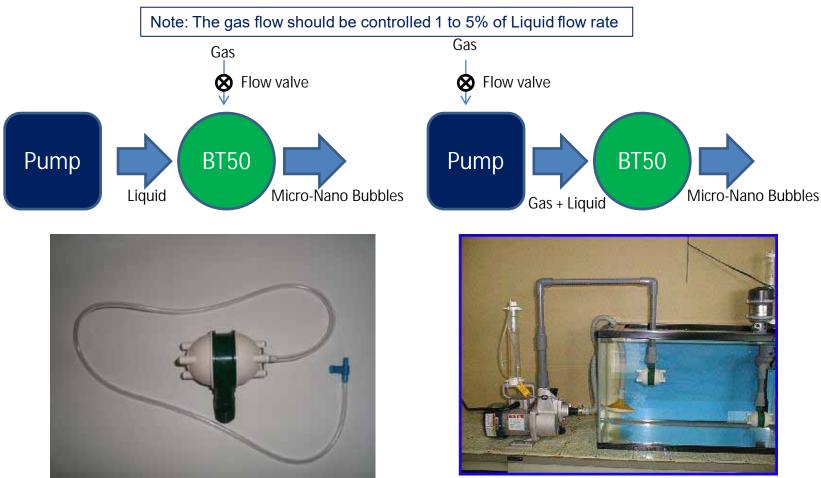


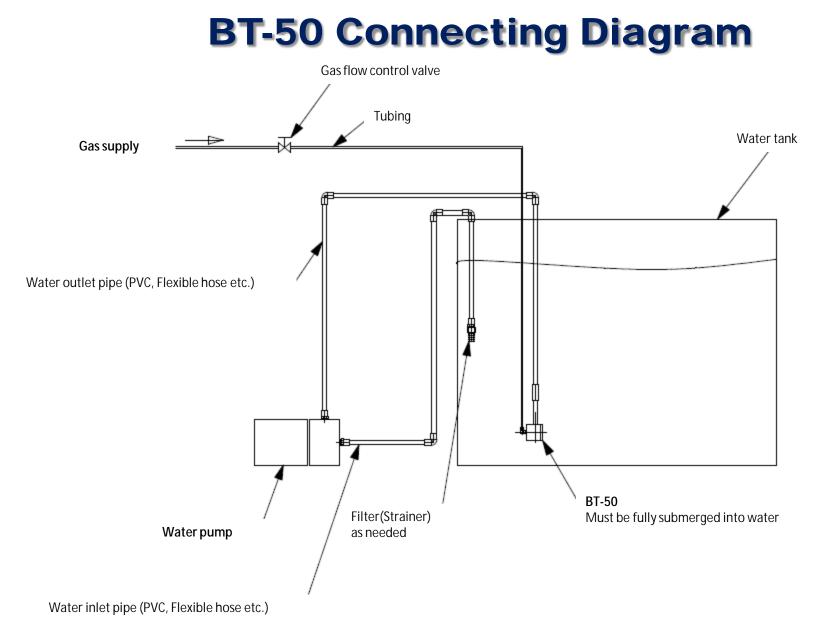


BT-50 Turbulent Motion

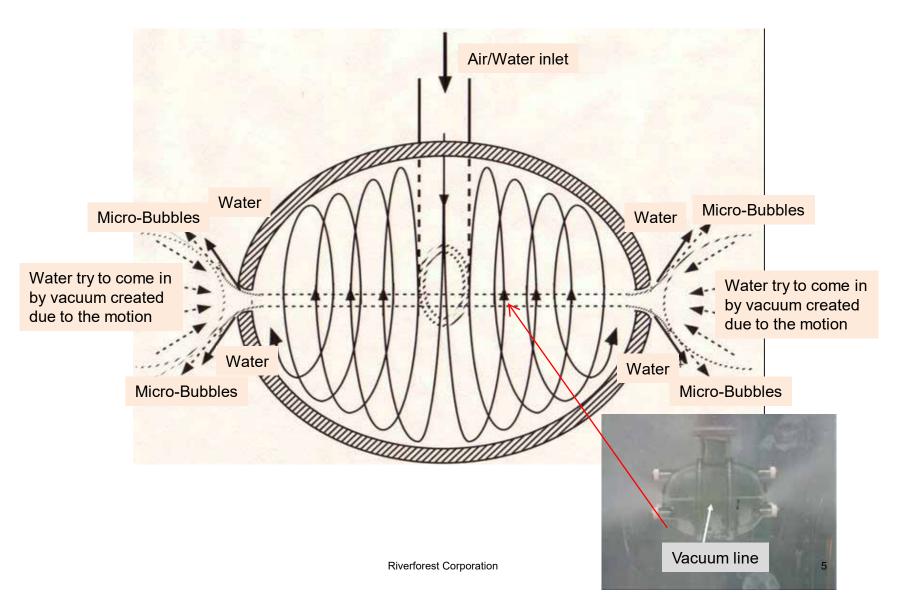

BT-50FR (PVDF Version)

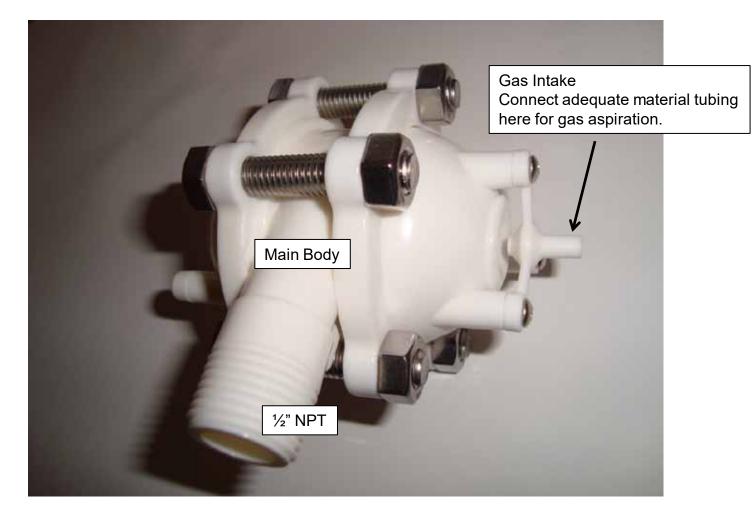

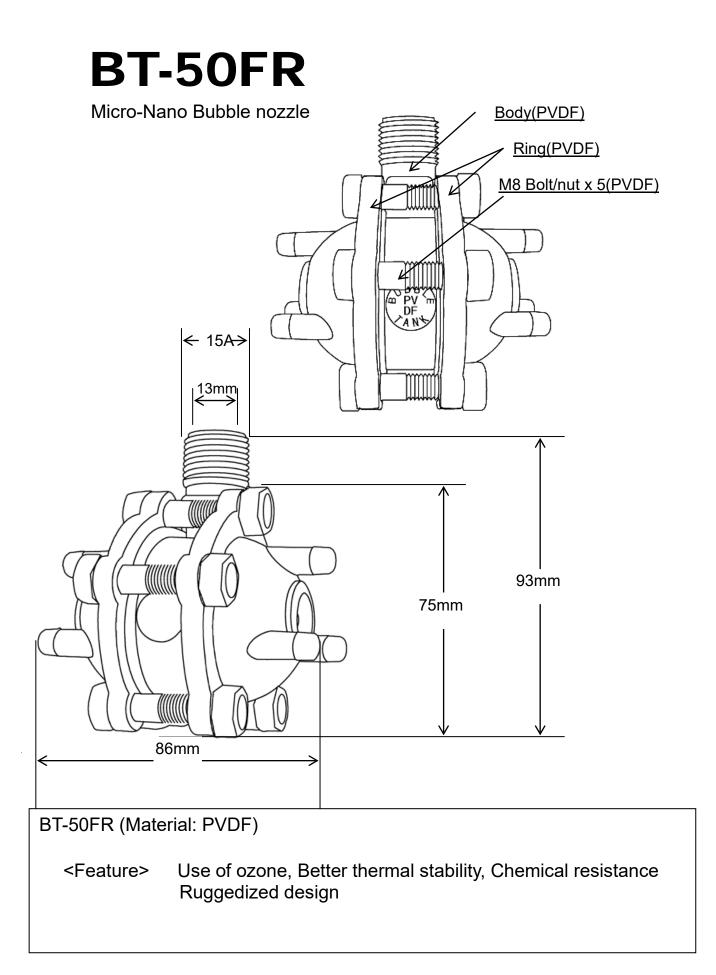


An example of multiple BT-50 connection






Retail Price: \$990 (ABS). Please ask for quantity, distribution partner and OEM pricing.

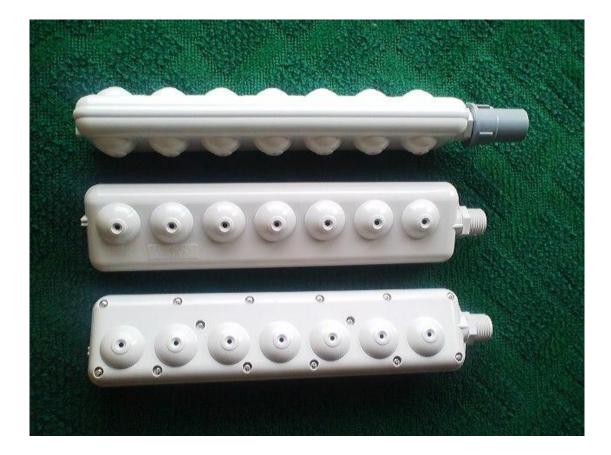

Pump requirement:100-140lpm (26-37gpm) water flow at 0.25-0.3Mpa(35-42psi) pressure. Gas volume: 1-2.8lpm


BT-50 for DAF tank

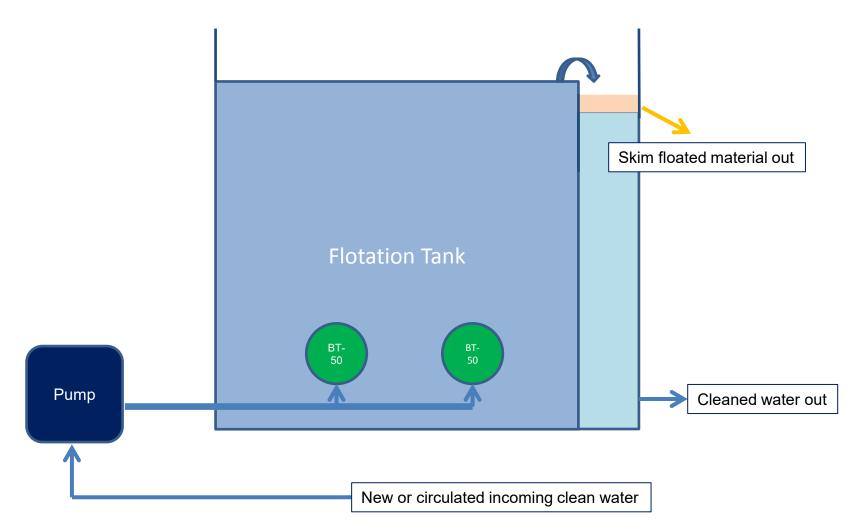

BT-50P for DAF



Added plates reduce rapid water output to avoid unnecessary mixing of water.

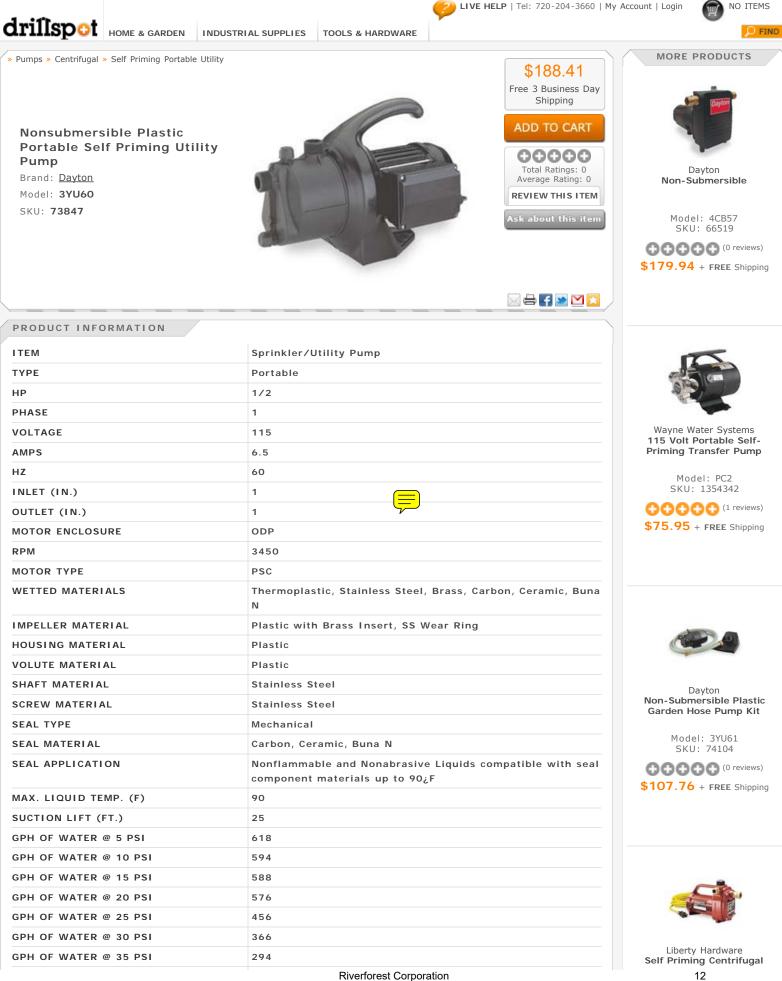

NO ITEMS

Dayton 3YU60 Nonsubmersible Plastic Portable Self Priming Utility Pump

GPH OF WATER @ 40 PSI	252	Pump
GPM OF WATER @ 5 FT. OF HEAD	10.3	Model: 331
GPM OF WATER @ 10 FT. OF HEAD	9.9	SKU: 118395
GPM OF WATER @ 15 FT. OF HEAD	9.8	(0 reviews)
GPM OF WATER @ 20 FT. OF HEAD	9.6	\$321.82 + \$13.61 Shipping
GPM OF WATER @ 25 FT. OF HEAD	7.6	
GPM OF WATER @ 30 FT. OF HEAD	6.1	
GPM OF WATER @ 35 FT. OF HEAD	4.9	
GPM OF WATER @ 40 FT. OF HEAD	4.2	
MAX. HEAD (FT.)	134	EEE CODE
MAX. PRESSURE (PSI)	58	10
CORD	10 ft.	
BEST EFFICIENCY GPM @ HEAD (FT.)	N@A	Wayne Water Systems 1/2 HP Portable Cast-Iron Transfer Pump
MAX. SPECIFIC GRAVITY	1.0	
MAX. CASE PRESSURE (PSI)	58	Model: PC4
MAX. FLUID VISCOSITY	100 SSU	SKU: 1354343
IMPELLER TYPE	Closed Impeller	(0 reviews)
BEARING TYPE	Ball	\$110.75 + \$15.39 Shipping
DUTY	Continuous	(Out of Stock)
MAX. DIA. SOLIDS (IN.)	Clear water Only	
AGENCY COMPLIANCE	UL Listed	
MANUFACTURERS WARRANTY LENGTH	1 Year	
APPLICATION	To Transfer Water, Run Multiple Lawn Sprinklers or Boost City Water Pressure Up to 40 PSI for Washing Cars, Boats and Farm Equipment	
FOR USE WITH	Nonflammable Liquids Compatible with Pump Materials	
HEIGHT (IN.)	10.0	
LENGTH (IN.)	14.5	
WIDTH (IN.)	7.8	
INCLUDES	1" FNPT x 3/4" Garden hose adapters	
WEIGHT	18.00	

Portable Utility/Sprinkler Pump

• Versatile self-priming pump transfers water, runs multiple lawn sprinklers (using water from lakes, streams, and ponds), or boosts city water pressure.

• Overload protection and On-Off switch. Plastic impeller, and convenient built-in carrying handle. Includes garden hose adapters.

Mechanical carbon ceramic Buna N seal

• WARNING: Use only with nonflammable liquids compatible with pump component materials and in nonflammable/nonexplosive atmospheres.

• California Proposition 65 Warning: This product contains a product known to the State of California to cause cancer. Warning: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

NonSubmersible Plastic Portable Self Priming Utility Pump, HP Rating 1/2, Voltage @ 60 Hz 115, Current @ 115 VAC 7.2 Amps, Manual Switch, Water Flow @ 5 Feet of Head 6.1 GPM, Shut Off @ 51 Feet, Discharge NPT 1 Inches, Maximum Soild Handling 1/4 inch, Maximum Temperature 90 Degrees F, Cord 16/3 x 10 Feet, Height 9 Inches

CUSTOMER SERVICE Contact Us 720-204-3660 Help / FAQ SHIPPING + RETURNS Shipping Policy Cancellations / Changes Returns ACCOUNT Login / Register My Account Order Status COMPANY INFO About Us Testimonials Privacy Policy 13