




Tornillo cabeza alomada DIN 603

DIN 603

Cabeza alomada

Tornillo de cabeza alomada.

Acabado: Zincado

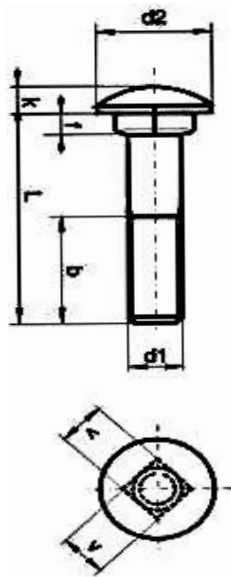

p: Paso de rosca
k: Altura de cabeza
s: Ancho de llave
d: Métrica
L: Longitud
f: Cuello
d2: Cabeza
b1: L ≤ 125 mm
b2: 125 mm < L ≤ 200 mm

L (mm)	M-5 Ø	M-6 Ø	M-8 Ø	M-10 Ø	M-12 Ø	M-16 Ø
16	X	X	X			
20	X	X	X	X		
25	X	X	X	X	X	
30	X	X	X	X	X	
35	X	X	X	X	X	
40	X	X	X	X	X	X
40	X	X	X	X	X	X
45	X	X	X	X	X	X
50	X	X	X	X	X	X
55	X	X	X	X	X	X
60	X	X	X	X	X	X
65	X	X	X	X	X	X
70	X	X	X	X	X	X
75	X	X	X	X	X	X
80	X	X	X	X	X	X
90		X	X	X	X	X
100		X	X	X	X	X
110		X	X	X	X	X
120		X	X	X	X	X
130		X	X	X	X	X
140		X	X	X	X	X
150		X	X	X	X	X
160			X	X	X	X
180			X	X	X	X
190			X	X	X	X
200			X	X	X	X
210			X	X	X	X
220			X	X	X	X
230			X	X	X	X
240			X	X	X	X
250			X	X	X	X
260			X	X	X	X

d (mm)	K (mm)	b1 (mm)	b2 (mm)	f (mm)	d2 (mm)	p (mm)
M-5	5,4	16	22	4	13	0,8
M-6	6,6	18	24	4	16	1
M-8	8,1	22	28	5	20	1,25
M-10	9,2	26	32	6	24	1,50
M-12	11,5	30	36	8	30	1,75
M-16	14,4	38	44	12	38	1,75



GARANTÍA FESIT

