



DISHWASHERS

- 500-1000 plates/hour
- Complete body made of AISI 304 18/8 stainless steel.
- Different washing programs.
- Check-valve to prevent water backflow.
- Designed for perfect washing while saving water and electricity.
- Completely electronically and automatically controlled.
- Washing cycle automatically interrupted when hood is opened.
- Thermostat controlled washing and rinsing systems.
- Detergent and rinsing pumps can be mounted easily.
- Modular units can be assembled side by side (pre-spray unit, sink unit, inlet and outlet tables,...)
- Flight type and Conveyor type
- Modular unit according customer needs:
- Pre-washing
- Washing
- Rinsing
- Drying
- From 2000 to 6000 plates/h
- Easy Access for cleaning and maintenance.
- Limitless customizing on request.
- Power and water saving systems.



BYM 041

GLASSWASHER



BYM 041	
Width	17 3/8"
Depth	20 7/8"
Height	26 3/8"
Operating Cycle	120 s
Basket	15 1/8" x 15 1/8"
Voltage	208/240 V
Dimensions	17 3/8" x 20 7/8" x 26 3/8"
With Water Softener	

NEW



BYM 052

HIGH TEMP UNDERCOUNTER DISHWASHER

500 PLATES / HOUR



BYM 052		
Width	inch	23 5/8"
Depth	inch	23 5/8"
Height	inch	32 3/4"
Operating capacity	racks/h	32
Operating cycles	seconds	90-120-160
Tank capacity	gal	6.6
Water inlet	-	3/4"
Pressure of water supply	bar	2-4
Temperature of water supply	F	104-122
Washing water temperature	F	131
Rinsing water temperature	F	185
Rinse water consumption	gal	0.8 gal/cycle
Booster heater capacity	kW	4.5
Max power consumption	kW	5
Net weight	lb	132
Electrical rating	V	208/240



BYM 100E		
Width	inch	29 1/8"
Depth	inch	28 3/4"
Height	inch	62 1/4"
Operating capacity	racks/h	65
Operating cycles	seconds	62-98-123
Tank capacity	gal	9
Water inlet	-	3/4"
Pressure of water supply	bar	2-4
Temperature of water supply	F	104-122
Washing water temperature	F	140
Rinsing water temperature	F	185
Rinse water consumption	gal	48 gal/h
Booster heater capacity	kW	8
Max power consumption	kW	11.4
Net weight	lb	249
Electrical rating		208/240 V AC 3P 60 Hz

BYM 100E

HIGH TEMP DOOR TYPE DISHWASHER

1000 PLATES/HOUR



BYM 100ET

HIGH TEMP DOOR TYPE DISHWASHER

WITH DRAINAGE PUMP

1000 PLATES/HOUR





BYM 100EK		
Width	inch	29 1/8"
Depth	inch	28 3/4"
Height	inch	62 1/4"
Operating capacity	racks/h	65
Operating cycles	seconds	62-98-123
Tank capacity	gal	9
Water inlet	-	3/4"
Pressure of water supply	bar	2-4
Temperature of water supply	F	104-122
Washing water temperature	F	140
Rinsing water temperature	F	185
Rinse water consumption	gal	48 gal/h
Booster heater capacity	kW	8
Max power consumption	kW	11,4
Net weight	lb	249
Electrical rating		208/240 V AC 3P 60 Hz

BYM 100EK

HIGH TEMP DOOR TYPE DISHWASHER

1000 PLATES/HOUR






BYM 100EKT

HIGH TEMP DOOR TYPE DISHWASHER

WITH DRAINAGE PUMP

1000 PLATES/HOUR

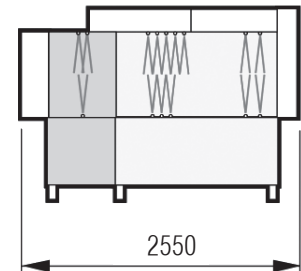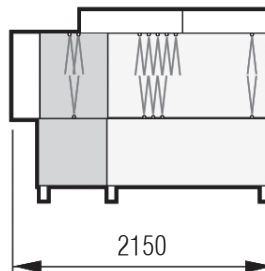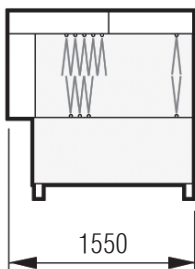


BYK
CONVEYOR TYPE DISHWASHER

BYK 220L/R

Capacity: 1600-2000 pl/hr

With Conveyor, Without Prewash

1550 mm (45 1/4")

BYK 220L/R
BYK 270L/R

Capacity: 2200-270 pl/hr

With Conveyor and Prewash

2150 mm (84 5/8")

BYK 270L/R
BYK 360L/R

Capacity: 2800-3600 pl/hr

With Conveyor, Prewash, Double Rinse

2550 mm (100 3/8")

BYK 360L/R

MODEL	OPTIONS
BYK-K70L	Drying Unit 70 cm (27 1/2"), left
BYK-K70R	Drying Unit 70 cm (27 1/2"), right
BYK-K90L	Drying Unit 90 cm (35 3/8"), left
BYK-K90R	Drying Unit 90 cm (35 3/8"), right
BYK-ID	Heat Transformation Unit

"Dishwashers are manufactured according to 50 °C water inlet. Extra boiler must be added on cold water feeds."

OPTIONS

(Not Included to the standard machines)

XB-MOD5A

High Dry 18Kw

XB-MOD9R

Heat Transformation Unit

XB-BYF-TY

Self Service Tray Washing
Difference



GT

WASHING HOSE REEL

KOD	LENGHT
GT 06	20 ft.
GT 10	32 ft.
GT 15	50 ft.

"Dishwashers are manufactured according to 50 °C water inlet. Extra boiler must be added on cold water feeds."



6001

Pre-Rinse Faucet

Table mounted



6002

Pre-Rinse Faucet

Table mounted, output-inverwal valve



6051

Pre-Rinse Faucet

Wall mounted



6052

Pre-Rinse Faucet

Wall mounted



EQUIPMENT FOR DISHWASHERS



- All equipments are made of only highest quality of AISI 304 18/8 stainless steel.
- There are many different models which enable to have different inlet-outlet combinations with dishwasher.



SOILED DISH SORTING TABLE WITH SCRAPPING HOLE



MODEL	DIMENSIONS
BSN 100	39 3/8" x 29 1/2" x 33 1/2"
BSN 120	47 1/4" x 29 1/2" x 33 1/2"
BSN 140	55 1/8" x 29 1/2" x 33 1/2"
BSN 160	63" x 29 1/2" x 33 1/2"
BSN 180	70 7/8" x 29 1/2" x 33 1/2"
BSN 200	78 3/4" x 29 1/2" x 33 1/2"
BSN 220	86 5/8" x 29 1/2" x 33 1/2"
BSN 240	94 1/2" x 29 1/2" x 33 1/2"

MODEL	DIMENSIONS
BAT 140	55 1/8" x 43 1/2" x 33 1/2"
BAT 160	63" x 43 1/2" x 33 1/2"
BAT 180	70 7/8" x 43 1/2" x 33 1/2"
BAT 200	78 3/4" x 43 1/2" x 33 1/2"
BAT 220	86 5/8" x 43 1/2" x 33 1/2"
BAT 240	94 1/2" x 43 1/2" x 33 1/2"
BAT 260	102 3/8" x 43 1/2" x 33 1/2"
BAT 280	110 1/4" x 43 1/2" x 33 1/2"



RACK SHELF



* Wall Mounted

MODEL	DIMENSIONS
BRD 110	43 1/4" x 19 5/8" x 19 5/8"
BRD 160	63" x 19 5/8" x 19 5/8"

* Table Mounted

MODEL	DIMENSIONS
BRT 120	47 1/4" x 23 5/8" x 23 5/8"
BRT 140	55 1/8" x 23 5/8" x 23 5/8"
BRT 160	63" x 23 5/8" x 23 5/8"
BRT 180	70 7/8" x 23 5/8" x 23 5/8"
BRT 200	78 3/4" x 23 5/8" x 23 5/8"
BRT 220	86 5/8" x 23 5/8" x 23 5/8"
BRT 240	94 1/2" x 23 5/8" x 23 5/8"
BRT 260	102 3/8" x 23 5/8" x 23 5/8"
BRT 280	110 1/4" x 23 5/8" x 23 5/8"

MODEL	MODEL	DIMENSIONS
BEN 100L	BEN 100R	39 3/8" x 29 1/2" x 43 1/4"
BEN 120L	BEN 120R	47 1/4" x 29 1/2" x 43 1/4"
BEN 140L	BEN 140R	55 1/8" x 29 1/2" x 43 1/4"
BEN 160L	BEN 160R	63" x 29 1/2" x 43 1/4"



DISHWASHER INLET TABLE / SINGLE SINK





**DISHWASHER INLET TABLE / SINGLE SINK /
PERFORATED LOWER SHELF**



MODEL	MODEL	DIMENSIONS
BER 100L	BER 100R	39 3/8" x 29 1/2" x 43 1/4"
BER 120L	BER 120R	47 1/4" x 29 1/2" x 43 1/4"
BER 140L	BER 140R	55 1/8" x 29 1/2" x 43 1/4"
BER 160L	BER 160R	63" x 29 1/2" x 43 1/4"



DISHWASHER INLET TABLE / DOUBLE SINK



MODEL	MODEL	DIMENSIONS
B2N 140R	B2N 140L	55 1/8" x 29 1/2" x 43 1/4"
B2N 160R	B2N 160L	63" x 29 1/2" x 43 1/4"
B2N 180R	B2N 180L	70 7/8" x 29 1/2" x 43 1/4"
B2N 200R	B2N 200L	78 3/4" x 29 1/2" x 43 1/4"



**DISHWASHER INLET TABLE / DOUBLE SINK /
PERFORATED LOWER SHELF**



MODEL	MODEL	DIMENSIONS
B2R 140R	B2R 140L	55 1/8" x 29 1/2" x 43 1/4"
B2R 160R	B2R 160L	63" x 29 1/2" x 43 1/4"
B2R 180R	B2R 180L	70 7/8" x 29 1/2" x 43 1/4"
B2R 200R	B2R 200L	78 3/4" x 29 1/2" x 43 1/4"


SPLASHBACK FOR INLET TABLE WITH SINK


MODEL	DIMENSIONS
BES 080 R/L	31 1/2" x 7 1/2" x 9 7/8"
BES 100 R/L	39 3/8" x 7 1/2" x 9 7/8"
BES 120 R/L	47 1/4" x 7 1/2" x 9 7/8"
BES 140 R/L	55 1/8" x 7 1/2" x 9 7/8"
BES 160 R/L	63" x 7 1/2" x 9 7/8"
BES 180 R/L	70 7/8" x 7 1/2" x 9 7/8"
BES 200 R/L	78 3/4" x 7 1/2" x 9 7/8"


DISHWASHER INLET - OUTLET TABLE


MODEL	DIMENSIONS
BTN 060	23 5/8" x 22 7/8" x 33 1/2"
BTN 080	31 1/2" x 22 7/8" x 33 1/2"
BTN 100	39 3/8" x 22 7/8" x 33 1/2"
BTN 120	47 1/4" x 22 7/8" x 33 1/2"
BTN 140	55 1/8" x 22 7/8" x 33 1/2"
BTN 160	63" x 22 7/8" x 33 1/2"


DISHWASHER INLET - OUTLET TABLE / PERFORATED LOWER SHELF


MODEL	DIMENSIONS
BTR 060	23 5/8" x 22 7/8" x 33 1/2"
BTR 080	31 1/2" x 22 7/8" x 33 1/2"
BTR 100	39 3/8" x 22 7/8" x 33 1/2"
BTR 120	47 1/4" x 22 7/8" x 33 1/2"
BTR 140	55 1/8" x 22 7/8" x 33 1/2"
BTR 160	63" x 22 7/8" x 33 1/2"



DISHWASHER INLET- OUTLET TABLE / CONVEYOR



MODEL	DIMENSIONS
BCN 100	39 3/8" x 21 1/8" x 33 1/2"
BCN 120	47 1/4" x 21 1/8" x 33 1/2"
BCN 140	55 1/8" x 21 1/8" x 33 1/2"
BCN 160	63" x 21 1/8" x 33 1/2"



MODEL	MODEL	DIMENSIONS
BCB 100L	BCB 100R	39 3/8" x 21 1/8" x 33 1/2"
BCB 120L	BCB 120R	47 1/4" x 21 1/8" x 33 1/2"
BCB 140L	BCB 140R	55 1/8" x 21 1/8" x 33 1/2"
BCB 160L	BCB 160R	63" x 21 1/8" x 33 1/2"

DISHWASHER OUTLET TABLE / CONVEYOR




DISHWASHER CORNER TABLE / CONVEYOR




MODEL	DIMENSIONS
BCK 100	39 3/8" x 21 1/8" x 33 1/2"

DISHWASHER RACKS

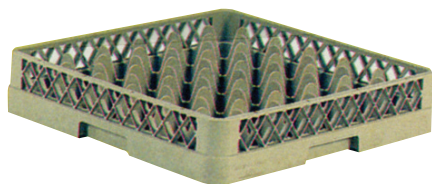


BB-36

GLASS RACK / 36 SECTIONS

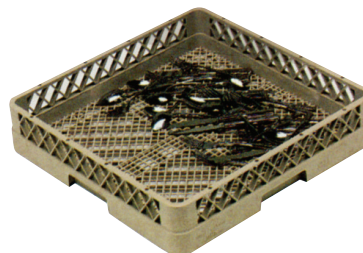

CKB

CUTLERY RACK

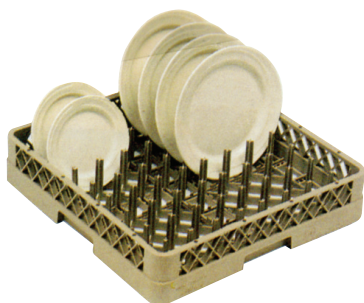

TB

PLATE RACK



CKB-8

CUTLERY RACK