


CONTROL SOLUTIONS


—
INDIVIDUAL CONTROL / CENTRALIZED CONTROL
INTEGRATION DEVICE

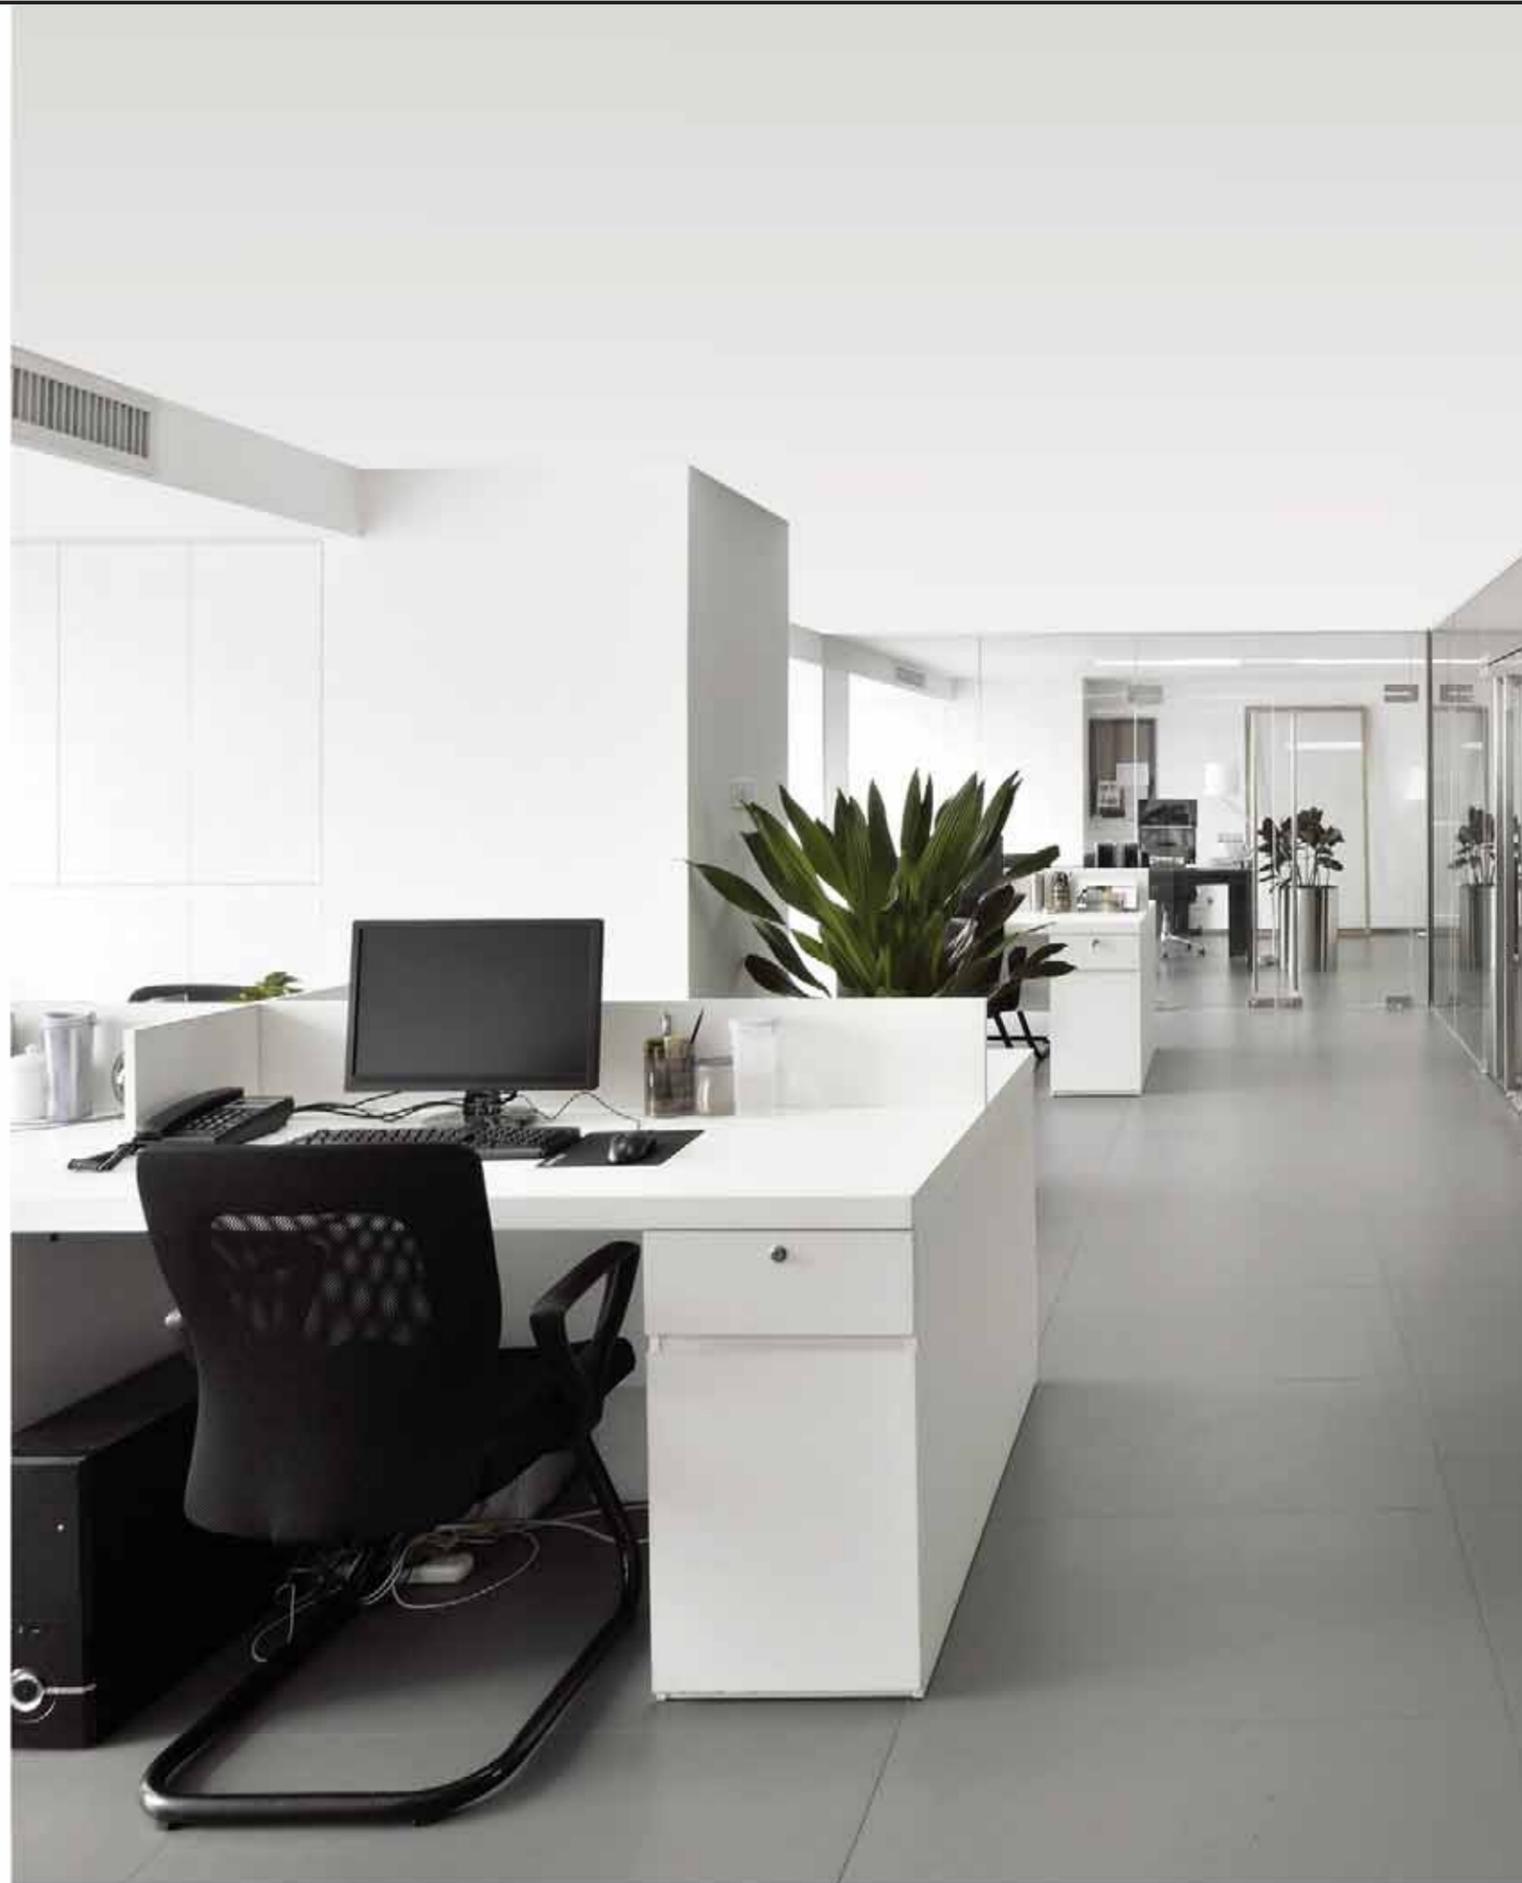

LG HVAC CONTROL LINE-UP

INDIVIDUAL CONTROL		CENTRALIZED CONTROL			
Wired Remote Controller		Wireless Remote Controller	Display	Platform	Gateway
Standard	Simple				
Standard III (White)  PREMTB100	 PQRCVCL0QW	PQWRHQ0FDB	AC Ez  PQCSZ250S0 (Indoor Unit ~32)	ACP 5  PACP5A000 (Indoor Unit ~256)	ACP Lonworks  PLNWKB000 (Indoor Unit ~64)
		Wi-Fi Controller			
Standard III (Black)  PREMTBB10	 PQRCVCL0Q	LG Wi-Fi Modem  For Indoor Unit PWFMD200	AC Ez Touch  PACEZA000 (Indoor Unit ~64)	AC Manager 5  PACM5A000 (Indoor Unit ~8,192)	Modbus RTU Gateway  PMBUSB00A
Standard II (White)  PREMTB001	 PQRCHCA0QW (Simple for Hotel)		AC Smart 5  PACS5A000 (Indoor Unit ~128)		KNX Gateway  LG-AC-KNX4 LG-AC-KNX8 LG-AC-KNX16 LG-AC-KNX64
Standard II (Black)  PREMTBB01	 PQRCHCA0Q (Simple for Hotel)				PI-485  For Indoor Unit (ERV) PHNFP14A0
Premium					
 PREMTA000 PREMTA000A PREMTA000B					

Note
1. AC Smart 5 & ACP 5 provides BACnet IP / Modbus TCP
2. KNX Gateway is provided by INTESIS

CENTRALIZED CONTROL	INTEGRATION DEVICE			
Facility Integrator	Indoor Unit		Outdoor Unit	AHU Kit
	Dry Contact	Control Accessory		
PDI (Power Distribution Indicator)  Premium (8 port) PQNUD1S40 Standard (2 port) PPWRDB000	 Simple Dry Contact PDRYCB000	 Group Control Wire PZCWRCG3	 IO Module (Input / Output Module) For MULTI V 5 PVDSMN000	 Communication Kit Return/Room Air control PAHCMR000
ACS IO Module (Input / Output Module)  PEXPMB000	 Dry Contact for Thermostat PDRYCB300	 Remote Temperature Sensor PQRSTA0	 Variable Water Flow Control kit For MULTI V WATER IV PWFKCN000	 Discharge Air control PAHCMS000
Chiller Option Kit  PCHILLN000	 2 Points Dry Contact (For Setback) PDRYCB400	 Low Profile Remote Temperature Button Sensor ZRTBS01	 Low Ambient Kit For MULTI V IV, 5 PRVC2	 Control kit PRCKD21E (~ 4 ODU) PRCKD41E (~ 8 ODU)
ACU IO Module  PEXP300	 For Modbus PDRYCB500	 Zone Controller 4 Zones by thermostat ABZCA	 Cool / Heat Selector PRDSBM	 EEV Kit (Electronic Expansion Valve) PRLK048A0 (~ 10HP) PRLK096A0 (~ 20HP)
 PEXP200				 TXV Kit (Thermal Expansion Valve) PATX13A0E (8 ~ 16HP) PATX20A0E (18 ~ 26HP) PATX25A0E (28 ~ 36 HP) PATX35A0E (38 ~ 46 HP) PATX50A0E (48 ~ 56 HP)
 PEXP100				

LG CONTROL SOLUTIONS

MULTI V 5 offers a diverse range of effective control solutions that satisfy specific needs of each building and its user scene. These controlling systems are equipped with user friendly interface, flexible interlocking environment, energy management and smart individual controller for optimized controlling conditions and smart building management.



INDIVIDUAL CONTROL



FEATURE FUNCTIONS

Controller Name	Wired Remote Controller					Wireless Remote Controller	Wi-Fi Controller
	Premium	Standard III	Standard II	Simple	Simple(Hotel)		
Model Name							
	PREMTA000 PREMTA000A PREMTA000B	PREMTB100 PREMTBB10	PREMTB001 PREMTBB01	PQRCVCL0Q PQRCVCL0QW	PQRCHCA0Q PQRCHCA0QW	PQWRHQ0FDB	PWFMD200
Basic							
On / Off							
Fan Speed Control							
Temperature Setting							
Mode Change							
Auto Swing							
Vane Control (Louver Angle)							
E.S.P (External Static Pressure)							
Electric Failure Compensation							
Indoor Temperature Display							
ALL Button Lock (Child Lock)							
Advanced							
Schedule / Timer	Weekly-Yearly	Weekly-Yearly	Weekly	-	-	Sleep / On / Off	Weekly
Additional Mode Setting ¹⁾							
Time Display							
Humid. Display							
Advanced Lock (mode, set point, set point range, On / Off Lock)	Advanced Lock	Advanced Lock	Mode Lock				
Filter Sign							
Energy Management ²⁾							
Dual Set Point							
Human Detection							
Temp. Humidity Compensation							
Wi-Fi AP Mode Setting							
ETC							
Operation Status LED							
Wireless Remote Controller Receiver	³⁾		³⁾	³⁾	³⁾		
Display	5 inch Color	4.3 inch Color	4.3 inch mono	2.6 inch mono	2.6 inch mono	2 inch mono	
Size (W x H x D, mm)	137 x 121 x 16.5	120 x 120 x 16	120 x 120 x 16	64 x 120 x 15	64 x 120 x 15	51 x 153 x 26	
Black Light Control for Screen Saver							

: Applied, - : Not Applied

1) It might not be indicated or operated at the partial product

2) Centralized control (PACEZA000 / PACS5A000 / PACP5A000 / PLNWK000) and PDI (PQNUD1S40 / PPWRDB000) should be installed for this function

3) For ceiling type duct

Note : 1. Indoor unit should have functions requested by the controller

2. If you need more detail, please refer to the manual of product. (<http://partner.lge.com>: Home> DocLibrary> Manual)

STANDARD III WIRED REMOTE CONTROLLER

4.3 inch Color screen with a modern design.



PREMTB100 (White) PREMTBB10 (Black)

- The Optimized Controller in MULTI V 5
 - Humidity sensor embedded
 - Comfort cooling setting
 - Smart Load Control setting
 - Outdoor unit low noise setting
 - Defrost mode setting
- New Modern Design & Easy Interface
 - Seamless design / Touch button
 - 4.3 inch color LCD / Intuitive GUI
- Energy Saving Functions
 - Instantaneous power monitor
 - Energy consumption check (power consumption, operation time)
 - Temp. Setback Timer, Time Limit Control
 - Target setting (ODU Capacity, Instantaneous power...etc)
- Group Control
 - Up to 16 Indoor units can be controlled with one remote control
- External Device On / Off (1 point)
 - Customized interlocking control with indoor unit is possible without dry contact
- 2 Set Points Control
 - Increase convenience and comfort
 - Auto changeover, Setback (home leave)

Model Name	PREMTB100 / PREMTBB10
On / Off	
Fan Speed Control	
Temperature Setting	
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan
Additional Mode Setting ¹⁾	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification / Comfort Cooling
Auto Swing	
Vane Control (Louver direction)	
E.S.P (External Static Pressure) ²⁾	
Reservation	Simple / Sleep / On & Off timer / Weekly / Yearly / Holiday
Time Display	
Electric Failure Compensation	
Lock	All / On & Off / Mode / Set temperature range
Filter Sign	(Remain time + Alarm)
Energy Management	Check Energy Usage ³⁾ / Check Operation Time / Target Setting (Energy, Operation Time) / Time Limit Operation / Alarm Popup / Initialization Usage Data
Operation Status LED	
Indoor Temperature Display	
Indoor Humidity Display	
Display	4.3 inch TFT color LCD (480 x 272)
Size (W x H x D, mm)	120 x 120 x 16
Black light for Screen saver	
Home Leave	2 set points control


: Applied, - : Not Applied
 1) It might not be indicated or operated at the partial product
 2) This function is available for duct type
 3) This function requires PDI (PQNUD1S40 / PPWRDB000) to be installed.
 Note : 1. Indoor unit needs to have functions requested by the controller
 2. 2 set points control works normally with MULTI V Heat Recovery and Single Split Heat Pump. But in case of MULTI V Heat Pump, It may not work properly

Energy Saving Function

Energy Management


- Energy Monitoring & Alarm
- Real-time and day / week / month / year energy usage monitoring is possible. In addition, it can set target for energy usage and operation time, and alarm will be displayed when exceeded.

* PDI (PQNUD1S40 / PPWRDB000) is required.

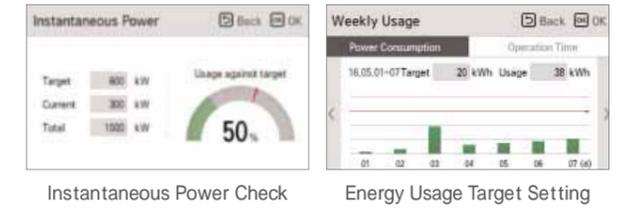

Time Limit Control

- The time-limit operation is to limit the amount of time.
- By setting the device operation time in advance, you can control for how long a device works and have it stop automatically.

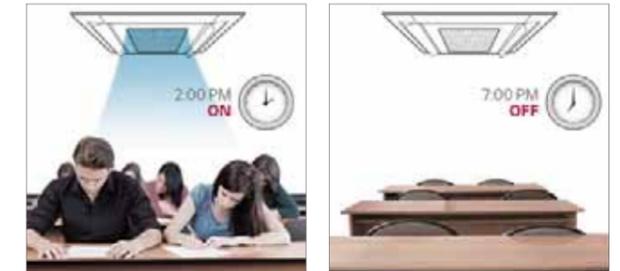

2 Set Points Control



Auto Changeover (Convenience)

- The indoor unit automatically manages room temperature with heating and cooling with extended setting temperature ranges.
- With setting heating and cooling set temp. just one time, comfortable condition will continue at all times.

Setback (Home Leave) (Energy saving & Comfort)

- In the absence, room temperature can be kept in the range of 2 set points instead of power off. It provides comfortable indoor environment quickly when the mode is changed to occupied.

* This function is for Heat Recovery system or Single heat pump. Otherwise it is not guaranteed.

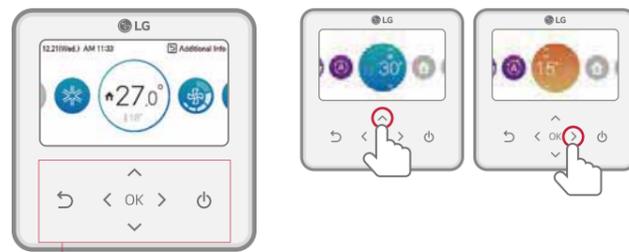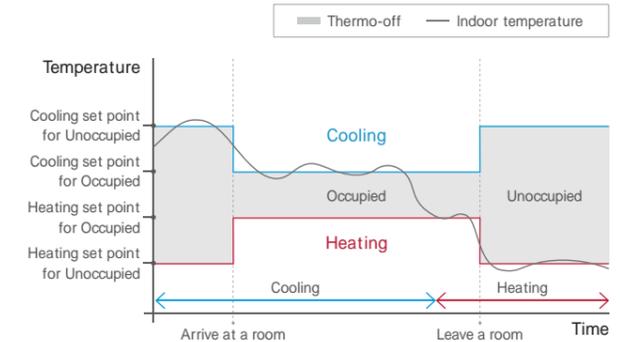

Touch Button



Comfort Level




Energy Contents



Error History

External Device On / Off

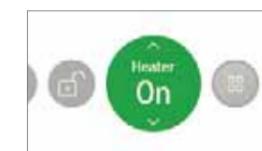

External Equipment Control
 User can turn on or off the external equipment through contact point output.



Customized Interlocking Control
 User can make control scenario. example) When temperature is under 10 degree, turn on the external heater.

Schedule Function



Easy Checking Schedule
 Standard III remote controller provides clock type daily schedule.



Exception Day settings
 Convenient settings are possible with schedule exception settings.

PREMIUM WIRED REMOTE CONTROLLER

5 inch full touch screen with a premium design.



PREMTA000¹⁾ / PREMTA000A²⁾ / PREMTA000B³⁾

1) English / Portuguese / Spanish / French
2) English / Italian / Russian / Chinese
3) English / German / Polish / Czech

Features & Benefit

- Full Touch screen
- The Optimized Controller in MULTI V 5
 - Comfort cooling setting
 - Smart Load Control setting
 - Outdoor unit low noise setting
 - Defrost mode setting
- Design with User's Convenience
 - Intuitive GUI
 - Main display simple mode
 - 5 inch color LCD
- Energy Saving Functions
 - Instantaneous power monitor
 - Energy consumption check (power consumption, operation time)
 - Temp. Setback Timer, Time Limit Control
 - Target setting (ODU Capacity, Instantaneous power...etc)
- Group Control
 - Up to 16 Indoor units can be controlled with one remote control
- 2 Set Points Control
 - Increase convenience and comfort
 - Auto changeover, Setback (home leave)

Model Name	PREMTA000 / PREMTA000A / PREMTA000B
On / Off	
Fan Speed Control	
Temperature Setting	
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan
Additional Mode Setting ¹⁾	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification
Auto Swing	
Vane Control (Louver direction)	
E.S.P (External Static Pressure) ²⁾	
Reservation	Simple / Sleep / On / Off / Weekly / Yearly / Holiday
Time Display	
Electric Failure Compensation	
Child Lock	
Filter Sign	(Remain time + Alarm)
Energy Management	Check Energy Usage ³⁾ / Check Operation Time / Target Setting (Energy, Operation Time) / Time Limit Operation / Alarm Popup / Initialization Usage Data
Operation Status LED	
Indoor Temperature Display	
Wireless Remote Controller Receiver	4)
Display	5 inch TFT color LCD (480 x 272)
Size (W x H x D, mm)	137 x 121 x 16.5
Black Light for Screen Saver	
Home Leave	2 set points control

: Applied, - : Not Applied
1) It might not be indicated or operated at the partial product
2) This function is available for duct type
3) This function requires PDI (PQNUD1S40 / PPWRDB000) to be installed.
4) For ceiling type ducted unit
Note : 1. Indoor unit needs to have functions requested by the controller
2. 2 set points control works normally with MULT V Heat Recovery and Single Split Heat Pump. But in case of MULTI V Heat Pump, It may not work properly



Full Touch Screen



Easy Energy Management

- Check the operation hour or electricity usage
- Comparison of usage compared to last year
- Set the target usage and time




Easy Scheduling

- Daily, Weekly, Yearly schedule function
- Schedule pattern setting
- Schedule copy




2 Set points Control

- Auto changeover switching the operation mode automatically
 - Setback (Home Leave) Changing status by occupied / unoccupied
- * This function is only for Heat Recovery system and Single heat pump.

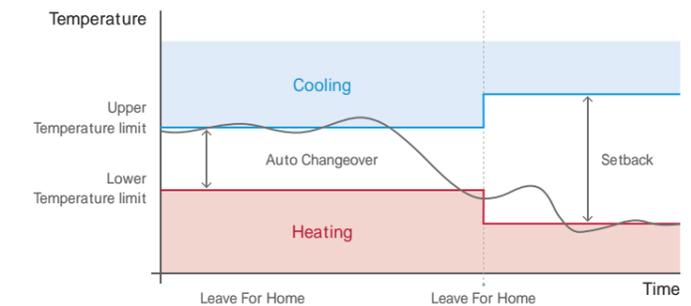

Group Control

1. Max. 16 Indoor units by one remote controller.

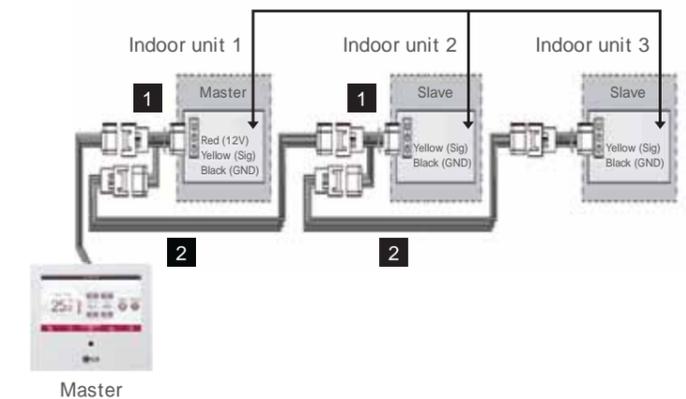

STANDARD II WIRED REMOTE CONTROLLER

Providing easy control of one or a group of indoor units with various functions.



PREMTB001 (White)



PREMTBB01 (Black)

Model Name	PREMTB001 / PREMTBB01
On / Off	
Fan Speed Control	
Temperature Setting	
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan
Additional Mode Setting	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification
Auto Swing	
Vane Control (Louver direction)	
E.S.P (External Static Pressure)	
Reservation	Simple / Sleep / On / Off / Weekly / Holiday
Time Display	
Electric Failure Compensation	
Child Lock	
Filter Sign	(Remain time + Alarm)
Operation Status LED	
Indoor Temperature Display	
Wireless Remote Controller Receiver	1)
Size (W x H x D, mm)	120 x 120 x 16
Blacklight	
Power Consumption Monitoring	2)
Check Model Information	

: Applied, - : Not Applied
 1) For ceiling type ducted unit
 2) This function requires PDI (PQNUD1S40 / PPWRDB000) to be installed.
 Note : Indoor unit needs to have functions requested by the controller

Features & Benefit

- Wired remote controller that can implement various functions such as schedule, filter sign.

SIMPLE WIRED REMOTE CONTROLLER

A simple way to control office or hotel systems in a compact design



PQRCVCL0QW (White) /
PQRCVCL0Q (Black)



PQRCHCA0QW (White) /
PQRCHCA0Q (Black)

Model Name	PQRCVCL0QW / PQRCVCL0Q	PQRCHCA0QW / PQRCHCA0Q
On / Off		
Fan Speed Control		
Temperature Setting		
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan	Only Changeable by Central Controller
Auto Swing		-
Vane Control (Louver direction)		-
E.S.P (External Static Pressure)		
Electric Failure Compensation		
Child Lock		
Indoor Temperature Display		
Wireless Remote Controller Receiver	1)	1)
Size (W x H x D, mm)	70 x 121 x 16	70 x 121 x 16
Blacklight		

: Applied, - : Not Applied
 1) For ceiling type ducted unit
 Note : Indoor unit needs to have functions requested by the controller

Features & Benefit

- Small remote control with minimal functionality

WIRELESS REMOTE CONTROLLER



PQWRHQ0FDB

Features & Benefit

- Easy to use while moving
- Main functions are available

Model Name	PQWRHQ0FDB
On / Off	
Fan Speed Control	
Temperature Setting	
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan
Additional Mode Setting	Plasma Purification / Energy-Saving Cooling / Robot Cleaning / Auto Dry
Auto Swing	
Vane Control (Louver direction)	
Reservation	Sleep / On / Off
Indoor Temperature Display	
Sleep Mode Auto	Max. 7 hours
Size (W x H x D, mm)	51.4 x 153 x 26

: Applied, - : Not Applied

LG Wi-Fi MODEM

Control LG air conditioners via using the internet devices as Android or iOS smartphones.



PWFMD200

Model Name	PWFMD200
Size (W x H x D, mm)	48 x 68 x 14
Interfaceable Products	MULTI V Indoor unit ³⁾
Connection Type	Indoor unit 1:1
Communication Frequency	2.4 GHz
Wireless Standards	IEEE 802.11b/g/n
Mobile Application	LG SmartThinQ (Android v4.1 (Jellybean) or higher, iPhone iOS 9.0 or higher)
Optional Extension Cable	PWYREW000 (10m extension)

1) Vane Control may not be possible according to the type of Indoor unit
 2) LG Centralized controller and PDI installation is required for this function
 3) For the compatibility with Indoor unit, please contact regional LG office
 Note : 1. Functionality may be different according to each IDU model
 2. User interface of application shall be revised for its design and contents improvement
 3. Application is optimized for smartphone use, so it may not be well functioning with tablet devices

Features & Benefit


- Access LG air conditioner anytime and from anywhere with Wi-Fi equipped device.

It is possible to check whether the air conditioner is turned off when the user goes out (energy saving), and can be operated in advance before entering the house (comfort improvement).


- LG's exclusive Home Appliances control app(SmartThinQ) is available

- Simple operation for various functions

- On / Off
- Operation Mode
- Current/Set Temperature
- Fan Speed
- Vane Control¹⁾
- Reservation (Sleep, Weekly On / Off)
- Energy Monitoring²⁾
- Filter Management
- Error Check




Overview

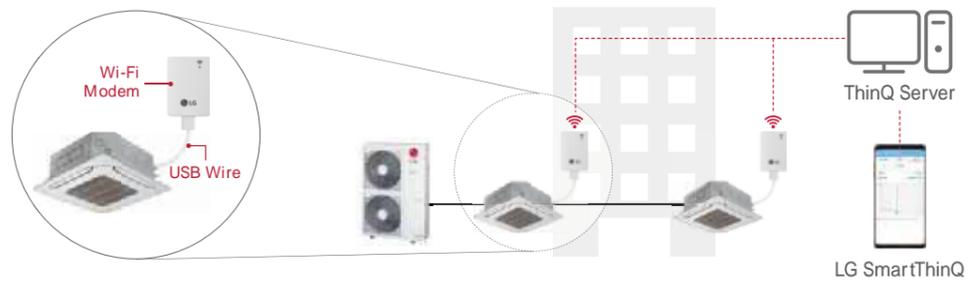


* Search "LG SmartThinQ" on Google market or Appstore then download the app. * Internet service with Wi-Fi connection has to be available.

Installation Scene

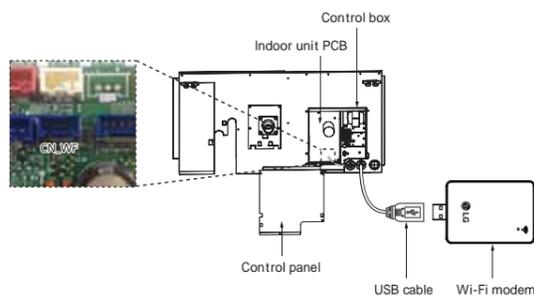

* Each indoor unit has a Wifi modem installation location inside the product, and it can be installed by exposure if necessary.

Connected Diagram

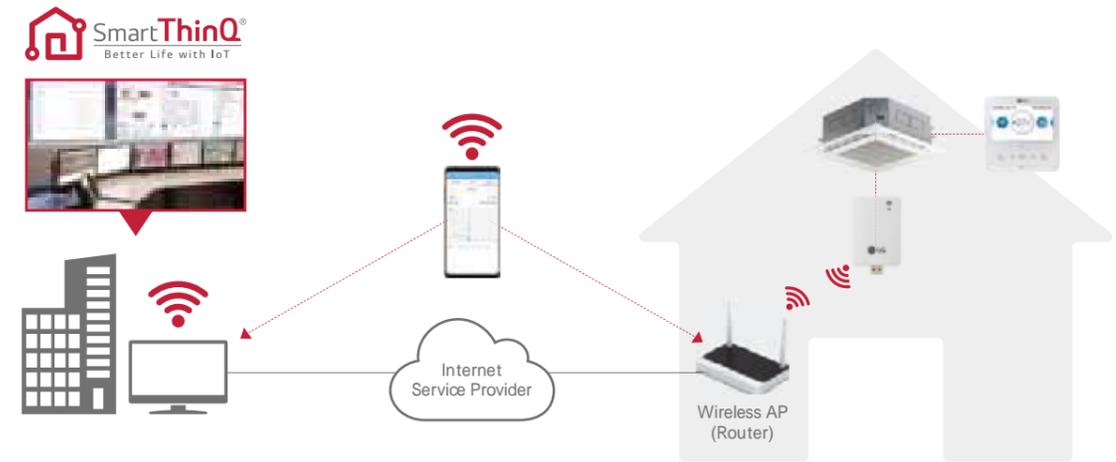

Connection (Pairing) Order

1. Make LG account on LG Smart ThinQ and select the Router that will use
2. Insert passwords of selected router and do set AP by LG remote controller
3. Confirm the pairing between Wi-Fi Modem and Router


Smart ThinQ

Simple operation for various functions

On / Off, Current Temp



Mode, Set Temp

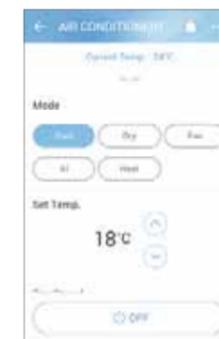


Vane Control



Straight forward Management

Reservation

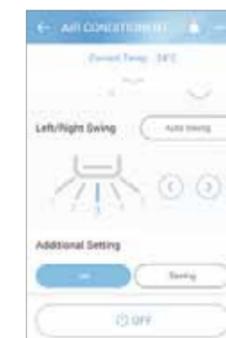

Energy Monitoring



Smart Diagnosis



Filter Management



CENTRALIZED CONTROL

CENTRALIZED CONTROLLER FEATURE LIST

Controller Name		AC Ez	AC Ez Touch	AC Smart 5 ⁵⁾	ACP 5 ⁵⁾	ACP Lonworks	AC Manager 5 ³⁾	
Model Name								
		PQCSZ250S0	PACEZA000	PACS5A000	PACP5A000	PLNWKB000	PACM5A000	
Product	DO	-	-	2	4	2	-	
	DI	-	1	2	10	2	-	
	IDUs	32	64	128	256	64	8,192	
	Max. Connectable No.	ERV	32	64	128	256	64	-
		A/C + ERV	32	64	128	256	64	-
	AHU	-	-	16	16	16 ⁴⁾	-	
Chiller	-	-	5 Optional ²⁾	10 Optional ²⁾	-	-		
Compatibility	Air Conditioner	1)	-	-	-	-	-	
	Ventilation (ERV / ERV DX)	2)	-	-	-	-	-	
	Heating	-	-	-	-	-	-	
	AHU	-	-	-	-	-	-	
	Chiller	-	-	4)	4)	-	-	
	ACS IO	-	-	4)	4)	4)	-	
Additional Function	Add Drawing	-	-	4)	4)	4)	-	
	Group Management	-	-	4)	4)	4)	-	
	Auto Changer Over	-	-	4)	4)	4)	-	
	Set Back	-	-	4)	4)	4)	-	
	2 Set	-	-	-	-	4)	-	
	Change Alarm	-	Filter	Filter	Filter	Filter	Filter	
	Indoor Unit Lock	-	-	-	-	4)	-	
	Cycle	-	-	-	-	4)	-	
	Schedule	-	-	4)	4)	4)	-	
	Auto Control	Peak Control	Priority Control	-	-	-	4)	-
Outdoor Unit Capacity Control			-	-	4)	4)	4)	
Demand Control		Priority Control	-	-	-	-	4)	
		Outdoor Unit Capacity Control	-	-	-	-	4)	
Time limit control		-	-	4)	4)	4)	-	
InterLocking		-	-	4)	4)	4)	-	
Energy Navigation	-	-	4)	4)	-	-		
Energy Report	Power	-	-	-	-	4)	-	
	Gas	-	-	-	-	4)	-	
	Run time	-	-	4)	4)	4)	-	
	Email	-	-	4)	4)	4)	-	
PC / USB	-	-	4)	PC	PC	PC		
Trend Reporting	-	-	-	-	-	-		
History	Report (Control / Error)	-	Error	4)	4)	4)	-	
	Send Email	-	-	4)	4)	4)	-	
	Save to PC / USB	-	-	4)	4)	4)	PC	
etc	Summer Time	-	-	4)	4)	4)	-	
	Outdoor Unit Oil-Return Operation	-	-	4)	4)	4)	-	
	User Authority	-	Password	4)	4)	4)	-	
PC Access	-	-	4)	4)	4)	-		

: Applied, - : Not Applied
 1) Except for some feature (individual lock, limit, temp., etc.)
 2) Except for some feature (user mode, additional function, etc.)
 3) ACP 5 or AC Smart 5 is required
 4) This function is possible to use in Web Only (BMS Point is not applied)
 5) Without additional device, ACP 5 and AC Smart 5 provide BACnet IP and Modbus TCP interface for BMS

AC EZ TOUCH

Smart management with 5 inch touch screen for small site.



PACEZA000

Model Name	PACEZA000
Size (W x H x D, mm)	137 x 121 x 25
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro kit / THERMA V
Maximum number of units	64
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Error Check	
Slave Mode (Interlocking with higher level controller)	
Schedule	Weekly / Monthly / Yearly / Exception day
Remote Access	By client S/W
Emergency Stop & Alarm Display	
Power Consumption Monitoring (with PDI)	
Auto Changeover / Setback	
Temperature Limit	
Operation History	Error record
ODU Low Noise 1)	
Daylight Saving Time	
External IO Port	DI 1
IPv6 Support	

: Applied, -: Not Applied
1) It is only available in some products

Features & Benefit

- Remote Access with Graphical User Access Control
- Total 200 Schedule Events
- Energy saving mode
- Energy Monitoring (with PDI)
- 2 Set point function (Upper/Lower Temperature setting)
- Temperature Set points Range Limit
- Remote Controller Lock (All, Temp, Mode, Fan Speed)
- Operation History
- Change alarm (Filter change)
- Emergency stop

Overview



Feature

PC Access

Users can control each space efficiently through PC access.



Energy Statistics (with PDI)

Statistics of operational status (time, power consumption) are provided to help make intelligent system operation decisions.

Energy		
2016. 2. 8 ~ 2016. 3. 19		
	Today	Week
Name	Usage(kWh)	Accumulated(kWh)
Group1	110	3021
Group2	150	6186
Group3	130	4267
Group4	120	7614


Energy Mode

When using energy mode function, operation mode changes from cooling to fan or heating to off mode by force. (It is available only 'on' mode indoor unit)



Alarm Indicator

It works when there are some errors or it's time to change the filter. Users can respond immediately according to alarm indicator therefore HVAC system is monitored consistently.

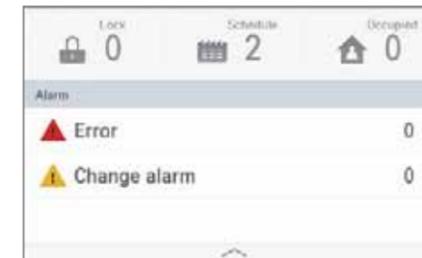

Schedule

Schedule control allows user to set the events in advance to maximize system performance. Also, by blocking unnecessary operation, it prevents a waste of energy.



Group / Individual Control

According to the situation, it can be controlled by group or each indoor unit. It is useful to monitor or control for the best fit of request.



AC EZ

Easy to manage up to 32 indoor units, including ERV with simple interface.




PQCSZ250S0

Model Name	PQCSZ250S0
Size (W x H x D, mm)	190 x 120 x 20
Interfaceable Products	MULTI V / ERV / ERV DX
Display	LED / LCD Display
Power	DC 12V
Maximum number of units	32
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	All
Error Check	
Slave Mode (Interlocking with higher level controller)	
Schedule	Weekly

: Applied, -: Not Applied

Features & Benefit

- 32 indoor units control
- Weekly Schedule
- Individual / Group Control

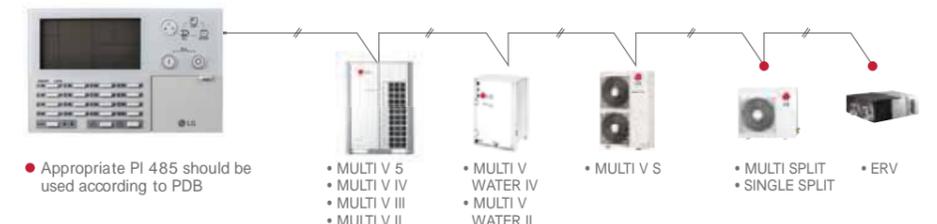

AC SMART 5

Control LG air conditioners via using the internet devices as Android or iOS bases smartphones.



PAC5A000


Model Name	PAC5A000
Size (W x H x D, mm)	253.2 x 167.7 x 28.9
Interfaceable Products	MULTI V / ERV / ERV DX / HYDRO KIT / THERMA V / AHU kit / LG Chiller ¹⁾
Maximum number of units	128
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Advanced Function Setting and Display ²⁾	Comfort Cooling / ODU Low Noise / ODU Defrost Mode / Comfort Level display / CO ₂ Level display (for ERV / ERV DX) / Night Time Free Cooling (for ERV / ERV DX)
Error Check	
Slave Mode (Interlocking with higher level controller)	
Schedule	Weekly / Monthly / Yearly / Exception day
Web Access	
Emergency Stop & Alarm Display	
Power Consumption Monitoring (with PDI)	
Auto Changeover / Setback	
Temperature Limit	
Operation Time Limit	
Visual Navigation	
Operation Trend	
Interlock Control	
Virtual Group Control	
ODU Capacity Control	
Energy Navigation (with PDI)	
Daylight Saving Time	
External IO Port	DI 2 / DO 2
BMS Integration ³⁾	BACnet IP / Modbus TCP
IPv6 Support	

Features & Benefit

- The central controller allows control of the LG HVAC system to various platforms. (Touch screen, PC, Smartphone, Tablet)
 - DI : 2 / DO : 2
 - Max. 128 IDU control
 - BACnet IP/Modbus TCP
 - Schedule
 - Map View (Visual Navigation)
 - Time limit control / Auto change over
 - Energy monitoring
 - History / Operation Trend
 - Interlock with 3rd party equipment (ACS IO, ACU IO Module is needed)
 - Multi level grouping
 - Emergency stop & alarm
 - Error alarm by E-mail

: Applied, - : Not Applied
 1) Chiller Option Kit (PCHLLN000) is required
 2) It is only available in some products
 3) For the detail point list, please refer to the installation manual


Overview

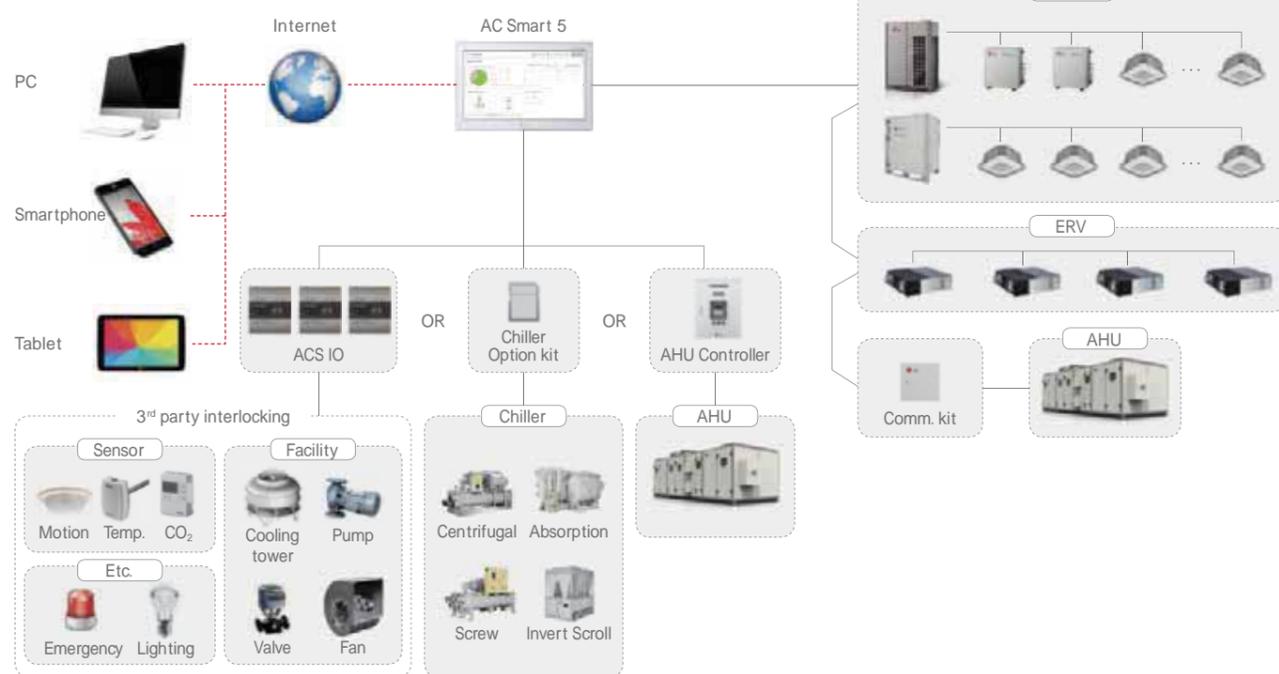

Feature

BMS Integration

Without additional device, AC Smart 5 provides BACnet IP / Modbus TCP interface for BMS (Building Management System) integration as well as its own management function.

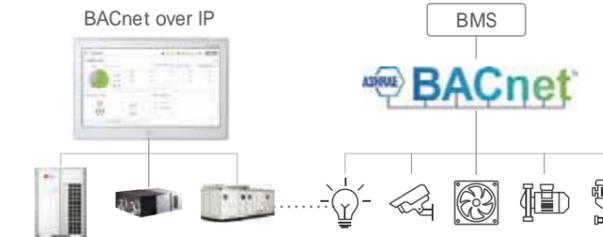


Energy Management / Operation Trend

Energy navigation function allows air conditioners operation to be managed under the monthly (Weekly / Yearly) plan of energy usage. By analyzing present energy consumption and comparing with the plan, overuse of system operational costs can be prevented.



Advanced Network Accessibility

AC Smart 5 reflects the state of the art of network technology trend. IPv6 (Internet Protocol version 6), which is the most recent version of the Internet Protocol, provides accessibility to the IPv6 compatible network environment. In addition, HTML5 allows you to easily control LG HVAC system on a variety of platforms (PC, Mobile, Tablet), at any time and from any location, not just on the touch screen.

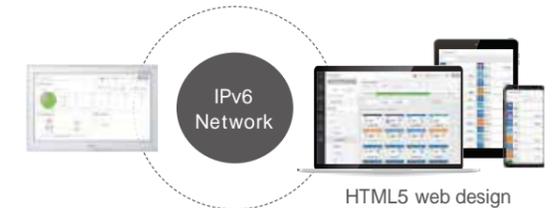


Visualized Control

Visual navigation enables controlling and monitoring the unit on floor plan view for the intuitive management.




Multi Level Group Composition

You can freely apply layer structure such as building, floor, zone, etc. and set the group as the same as the site composition to control and monitor the devices. Special control group You can additionally compose frequently used groups such as VIP Room, executive room, etc. regardless of the building structure.

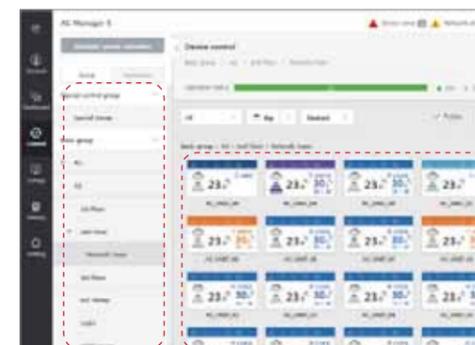

Interlocking with 3rd party equipment

AC Smart 5 can make operation scenario with 3rd party equipment by ACS IO Module. Control coverage is expanded. (Air conditioner only Sensors, Fans, Pumps, Switches...)

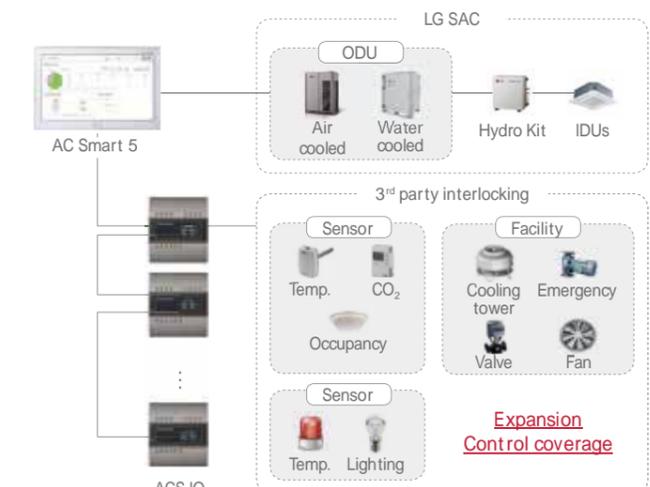

ACP 5

Advanced solution for BMS integration up to 256 units via BACnet and Modbus protocol as well as its own smart management function with web server interface.



PACP5A000


Features & Benefit

- The central controller allows control of the LG HVAC system to various platforms. (PC, Smartphone, Tablet)
 - DI :10 / DO : 4
 - Max. 256 IDU control
 - BACnet IP/Modbus TCP
 - Schedule
 - Map View (Visual Navigation)
 - Time limit control / Auto change over
 - Energy monitoring
 - History / Operation Trend
 - Interlock with 3rd party equipment (ACS IO, ACU IO Module is needed)
 - Multi level grouping
 - Emergency stop & alarm
 - Error alarm by E-mail

Model Name	PACP5A000
Size (W x H x D, mm)	270 x 155 x 65
Interfaceable Products	MULTI V / ERV / ERV DX / HYDRO KIT / THERMA V / AHU kit / LG Chiller ¹⁾
Maximum number of units	256
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Advanced Function Setting and Display ²⁾	Comfort Cooling / ODU Low Noise / ODU Defrost Mode / Comfort Level display / CO ₂ Level display (for ERV / ERV DX) / Night Time Free Cooling (for ERV / ERV DX)
Error Check	
Schedule	Weekly / Monthly / Yearly / Exception day
Web Access	
Emergency Stop & Alarm Display	
Power Consumption Monitoring (with PDI)	
Auto Changeover / Setback	
Temperature Limit	
Operation Time Limit	
Visual Navigation	
Operation Trend	
Interlock Control	
Virtual Group Control	
ODU Capacity Control	
Energy Navigation (with PDI)	
Daylight Saving Time	
External IO Port	DI 10 / DO 4
BMS Integration ³⁾	BACnet IP / Modbus TCP
IPv6 Support	

: Applied, - : Not Applied
 1) Chiller Option Kit (PCHLLN000) is required
 2) It is only available in some products
 3) For the detail point list, please refer to the installation manual

Overview

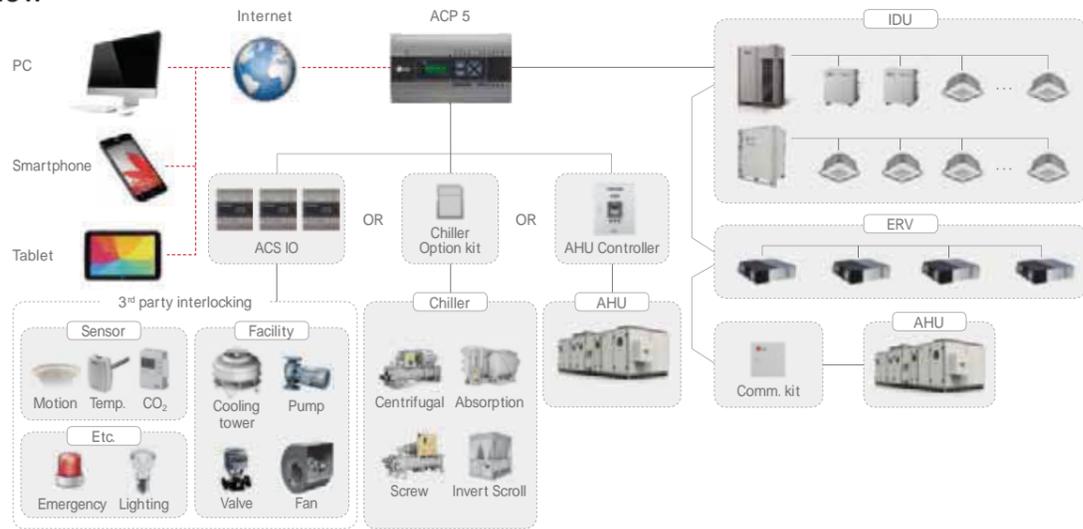

Advanced Network Accessibility

Energy Navigation

BACnet IP / Modbus TCP

Multi level group / Special control group



ACP LONWORKS GATEWAY

LonWorks easily link LG air conditioners and other existing building systems. By including ACP control function, the controlling continues even when error occurs with BMS.



PLNWK000


Features & Benefit

- Connect to use Lonworks protocol and LG air conditioner protocol.
- Process Ability (Max. connection) : Indoor unit 64EA, AHU Control Kit : Max. 16EA
- Self installation verification using interne (Web Server Included)
 - Diagnosis of communication status on LG Air-conditioner network
- It offers a variety of functions as ACP which allows the customer to efficiently control various types of equipment from the customer's own Integration.

Control	Monitoring
On / Off Command	On / Off
Operation Mode Setting	Operation Mode
Lock	Lock
Temperature	Temperature
Fan Level	Fan Level
Fan Direction Auto	Fan Direction Auto
Mode Lock	Mode Lock
Fan Level Lock	Fan Level Lock
Temperature Lock	Temperature Lock
Temperature Lower Limit	Temperature Lower Limit
Temperature Higher Limit	Temperature Higher Limit
Peak Convert Cycle	Peak Convert Cycle
Peak Setting	Peak Setting
Temperature Unit	Temperature Unit
Total Temperature Lock	-
Total On / Off	-
Total Temperature	-
-	Product Type
-	Product Address
-	Current Temperature
-	Alarm
-	Power
-	Error Code
-	Peak Current Operating Percent
-	Total Accumulate Power

: Applied, - : Not Applied

Overview

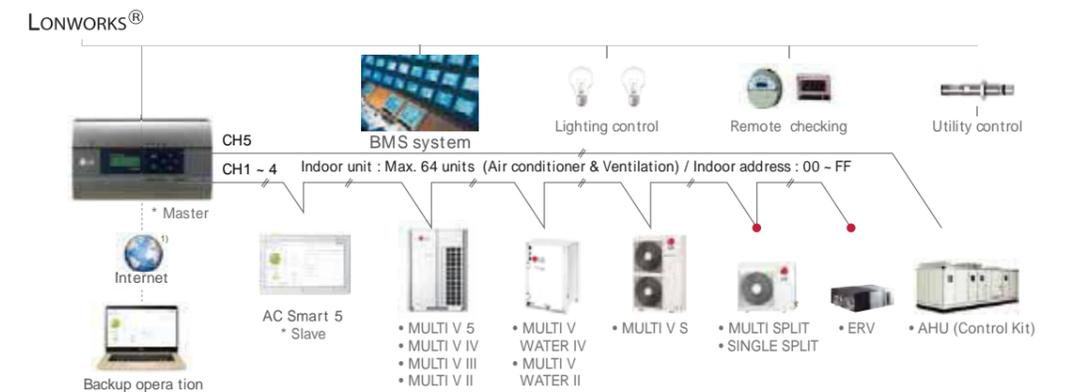

1) Assignment of public IP address is required to access central controller through internet. • Appropriate PI 485 should be used according to PDB (Product Data Book)

PI 485

PI 485 converts LG air conditioner's protocol to the RS485 protocol for the central controller



PHNFP14A0

- Power : Connected with the Indoor Units
- 1 for Each Indoor Unit - Indoor Unit (ERV)

AC MANAGER 5

Multiple ACP and AC Smart integration solution to manage multi sites up to 8,192 units as a single system.



PACM5A000


Features & Benefit

- Consol Type : No needs software installation and lock-key
- Max. 8,192 IDU Control
- Schedule
- Map View (Visual Navigation)
- Time limit control / Auto change over
- Energy Monitoring / Navigation
- History / Operation Trend
- Emergency stop & alarm
- Error alarm by E-mail
- Multi Language
(Eng, Ita, Spa, Por, Rus, Fra, Ger, Tur, Pol, Chi, Kor)

Model Name	PACM5A000
Size (W x H x D. mm)	270 x 155 x 65
Interfaceable Products	MULTI V / ERV / ERV DX / HYDRO KIT / THERMA V / AHU kit / LG Chiller ¹⁾
Maximum number of units	8,192 (supports 32 ACP 5 or AC Smart 5)
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Error Check	
Schedule	Weekly / Monthly / Yearly / Exception day
Web Access	
Emergency Alarm Display	
Power Consumption Monitoring (with PDI)	
Auto Changeover / Setback	
Temperature Limit	
Operation Time Limit	
Visual Navigation	
Operation Trend	
Interlock Control	
Virtual Group Control	
ODU Capacity Control	
Energy Navigation (with PDI)	

: Applied, - : Not Applied
 1) Chiller Option Kit (PCHLLN000) is required
 Note : AC Manager 5 requires ACP 5 or AC Smart 5

Overview

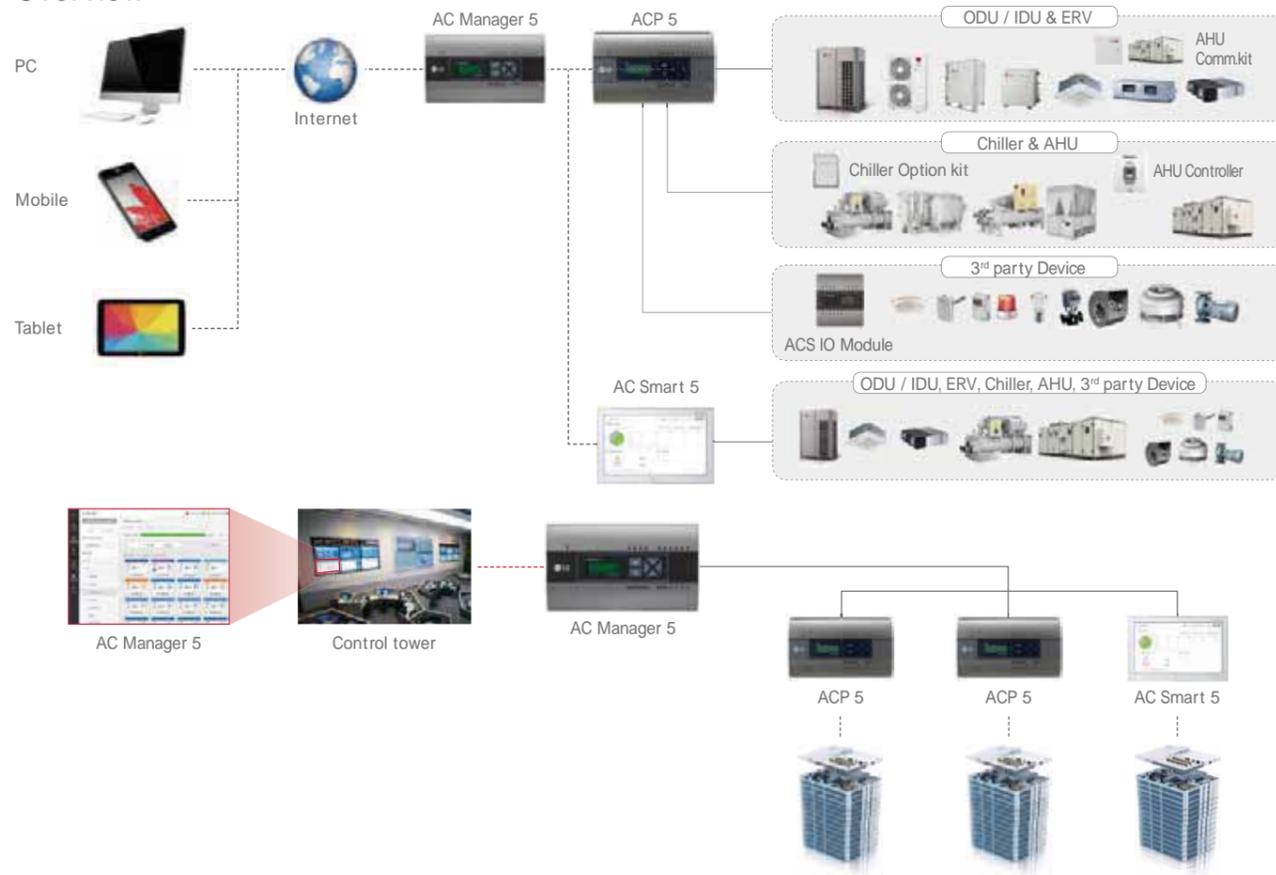

Feature

Stand-alone

Integrated with S/W program and Hardware platform, it is convenient to install since users no longer need to install program with lock-key on PC.

Up to 8,192 Connections for Indoor Units

Administrators can easily and conveniently manage a variety of LG HVAC equipment. Also, it is available to manage many buildings or areas at one place via AC Manager 5.

Advanced Network Accessibility & User Friendly GUI (reddot award)

As an advanced central controller, AC Manager 5 offers flexible interface for each user by assessing the device screen and automatically customizing the layout to provide the most optimized interface.

Energy Navigation & Energy Usage Trend



Energy navigation is the function to set the target usage amount to limit the monthly power consumption and to control so that the total accumulated power consumption does not exceed the target usage amount. It performs total of 7 control levels with the estimated/actual usage amount exceeding ratio compared to the monthly target usage amount. For the control method, there are indoor unit operation ratio, outdoor unit capacity control, and indoor unit operation control.

Peak Control

This function can reduce electricity use. There are two kinds of control logic. Energy saving effect by indoor unit operation rate control. Load management effect by outdoor unit capacity control.

Multi Level Group Composition

You can freely apply layer structure such as building, floor, zone, etc. and set the group as the same as the site composition to control and monitor the devices. Special control group You can additionally compose frequently used groups such as VIP Room, executive room, etc. regardless of the building structure.

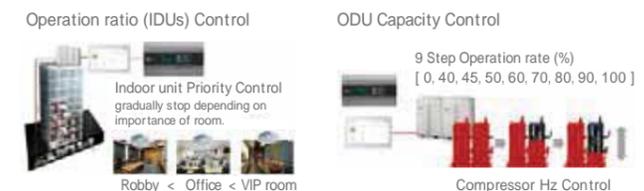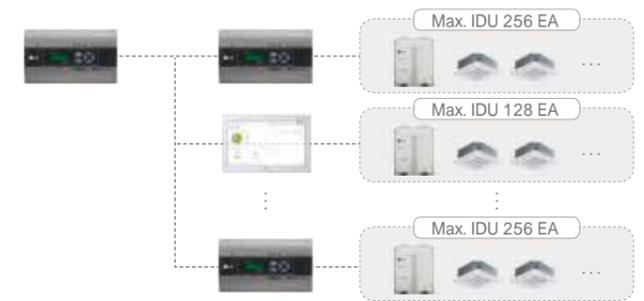

OUTDOOR UNITS

INDOOR UNITS

HOT WATER SOLUTION

VENTILATION SOLUTIONS

CONTROL SOLUTIONS

ACCESSORIES

KNX GATEWAY 1)

Specially designed to allow monitoring and bidirectional control of all the parameters and functionality of LG air conditioners from KNX protocol.



Model Name	Max. Connection Indoor Units
LG-AC-KNX4	4
LG-AC-KNX8	8
LG-AC-KNX16	16
LG-AC-KNX64	64

LG-AC-KNX4 / LG-AC-KNX8
 LG-AC-KNX16 / LG-AC-KNX64

Features & Benefit

- Easy installation, direct connection to all outdoor units (communication interface PMNFP14A1, when needed) and Heat recovering units (communication interface PHNFP14A0, when needed) through the RS485 Bus.
- Great integration flexibility. Using the supplied software LinkBoxEIB, a complete set of communication objects can be accessed.
- Direct connection to KNX bus
- Independent management of communications
- Power supply : 9 to 24V DC or 24V AC
- Standard DIN-Rail 6 modules enclosure
- Maximum connection unit
- LG Central controller (for example, AC Smart) and PDI can be operated with KNX gateway.


Link BoxEIB Configuration Software for IntesisBox KNX Serious

Easy to use tool for the configuration of intesisBox, in a fast and effective way. It offers the maximum integration possibilities with a minimal knowledge required on the system to be integrated.



- Only needed during configuration.
- One single tool for the configuration of the whole range of IntesisBox KNX series gateways.
- Supplied with IntesisBox with no additional cost.
- Configuration examples for all systems that can be integrated.
- Mapping table editable using excel, allowing a simple and fast association of KNX Group Addresses, exported from ETS, to IntesisBox's datapoints.
- Includes powerful and useful features for configuration, setup and troubleshooting.

Installation Scene

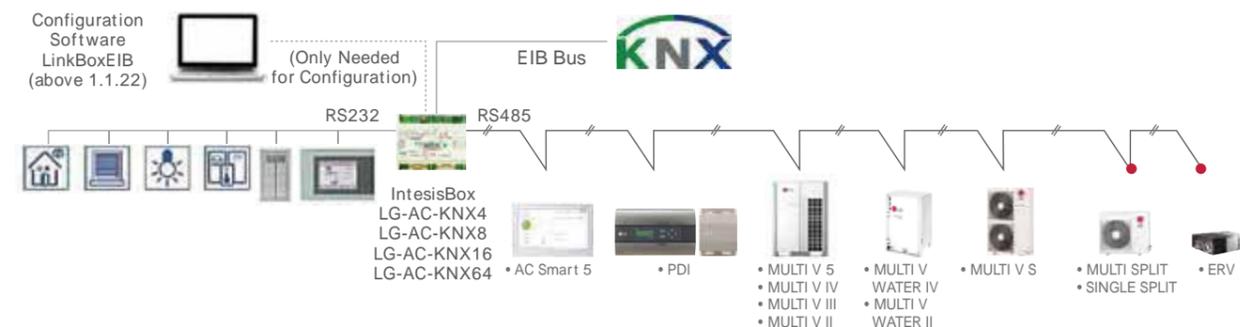

1) This product is provided by INTESIS.
 ● Appropriate PI 485 should be used according to PDB

MODBUS RTU GATEWAY

Providing Modbus RTU connection between LG Air conditioners and BMS.



PMBUSB00A

Features & Benefit

- Function
 - MODBUS RTU communication with MODBUS master controller
 - MODBUS RTU slave (RS485) / 9,600 bps
 - Applicable for Multi V 5
 - Size (W x H x D) : 53.6 x 89.7 x 60.7
 - Max. 16 IDUs with single module / Max. 64 IDUs with 4 modules
 - Power : DC 12V

Coil Register (0 x 01)

No.	Data Bit		Function
	Air Conditioner	Ventilator	
1	Operate (On / Off)	Operate (On / Off)	0 : Stop / 1 : Run
2	Auto Swing	Aircon Operate (On / Off)	0 : Disable / 1 : Enable
3	Filter Alarm Reset	Filter Alarm Reset	0 : Normal / 1 : Reset
4	Lock Remote Controller	Lock Remote Controller	0 : UnLock / 1 : Lock
5	Lock Operate Mode	Lock Operate Mode	0 : UnLock / 1 : Lock
6	Lock Fan Speed	Lock Fan Speed	0 : UnLock / 1 : Lock
7	Lock Target Temp.	Lock Target Temp.	0 : UnLock / 1 : Lock
8	Lock IDU Address	Lock IDU Address	0 : UnLock / 1 : Lock
9	Reserved	Quick Ventilate	0 : Disable / 1 : Enable
10	Reserved	Energy Save	0 : Disable / 1 : Enable

Discrete Register (0 x 02)

No.	Data Bit		Function
	Air Conditioner	Ventilator	
10001	Connected IDU	Connected IDU	0 : Disconnected / 1 : Connected
10002	Alarm	Alarm	0 : Normal / 1 : Alarm
10002	Filter Alarm	Filter Alarm	0 : Normal / 1 : Filter Alarm

Holding Register (0 x 03)


No.	Data Bit		Function
	Air Conditioner	Ventilator	
40001	Operate Mode	Operate Mode	0 : Cooling, 1 : Dehumidifying, 2 : Fan, 3 : Auto, 4 : Heating
40002	Fan Speed	Fan Speed	1 : Low, 2 : Mid, 3 : High, 4 : Auto
40003	Target Temp.	Target Temp.	16.0 ~ 30.0 [] x 10
40004	Target Temp. Limit (Upper)	Target Temp. Limit (Upper)	16.0 ~ 30.0 [] x 10
40005	Target Temp. Limit (Lower)	Target Temp. Limit (Lower)	16.0 ~ 30.0 [] x 10
40006	Reserved	Vent. Operate Mode	0 : HEX, 1 : Auto, 2 : Normal

Input Register (0 x 04)


No.	Data Bit		Function
	Air Conditioner	Ventilator	
30001	Error Code	Error Code	0 ~ 255 Please refer to the product error table.
30002	Room Temp.	RA Temp.	-99.0 ~ 99.0 [] x 10
30003	Pipe In Temp.	OA Temp.	-99.0 ~ 99.0 [] x 10
30004	Pipe Out Temp.	SA Temp.	-99.0 ~ 99.0 [] x 10
30005	Reserved	Pipe In Temp.	-99.0 ~ 99.0 [] x 10
30006	Reserved	Pipe Out Temp.	-99.0 ~ 99.0 [] x 10

Installation Scene

- Single module
 Max. 16 indoor units with a single module

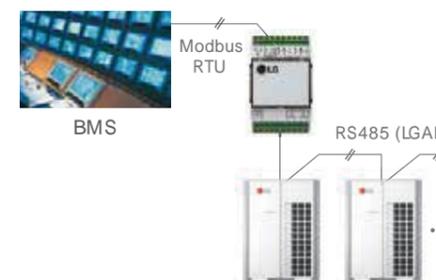

- Multiple module
 Max. 64 indoor units with 4 modules in one Modbus communication line

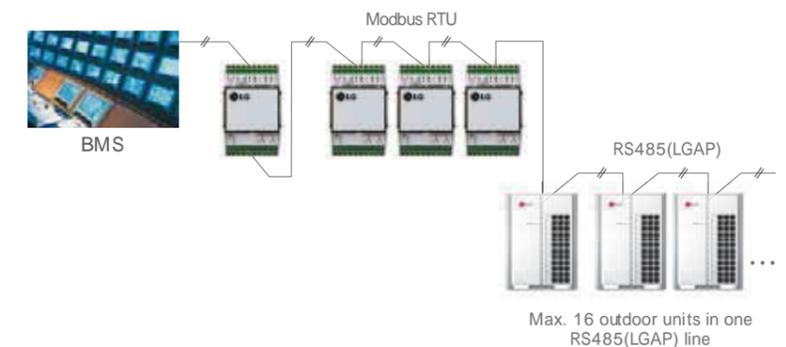

INTEGRATION DEVICE



PDI (POWER DISTRIBUTION INDICATOR)

PDI shows distributed power consumption of up to 128 indoor units





PQNUD1S40 (Premium, 8 port)
PPWRDB000 (Standard, 2 port)

Model Name	PQNUD1S40	PPWRDB000
Size (W x H x D, mm)	270 x 155 x 65	
Interfaceable Products	Air conditioner, ERV DX	
Maximum Number of Power Meters	EHP : 8 Watt meter GHP : 4 Watt meter / 4 Gas meter	EHP : 2 Watt meter GHP : 1 Watt meter / 1 Gas meter
Maximum Number of Indoor Units	MULTI V : 128	
Data Backup When Power Outage		
Power Input	PDI : AC 24V, Transformer : AC 220V	

: Applied, - : Not Applied

Features & Benefit

- Total and indoor power consumption monitoring is possible.
- When connected to the LG central controller, it is possible to expand functions such as energy monitoring, energy saving operation and target usage setting.
- It is also possible to distribute gas consumption in addition to electricity.

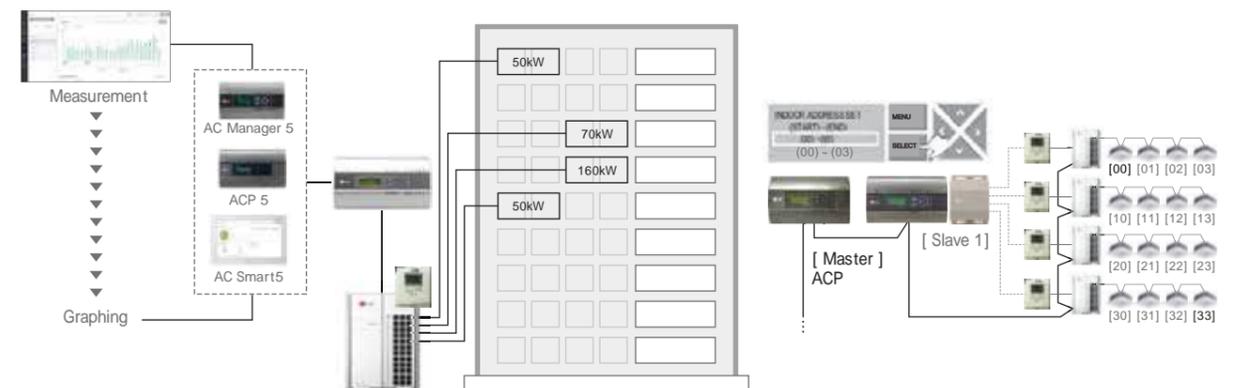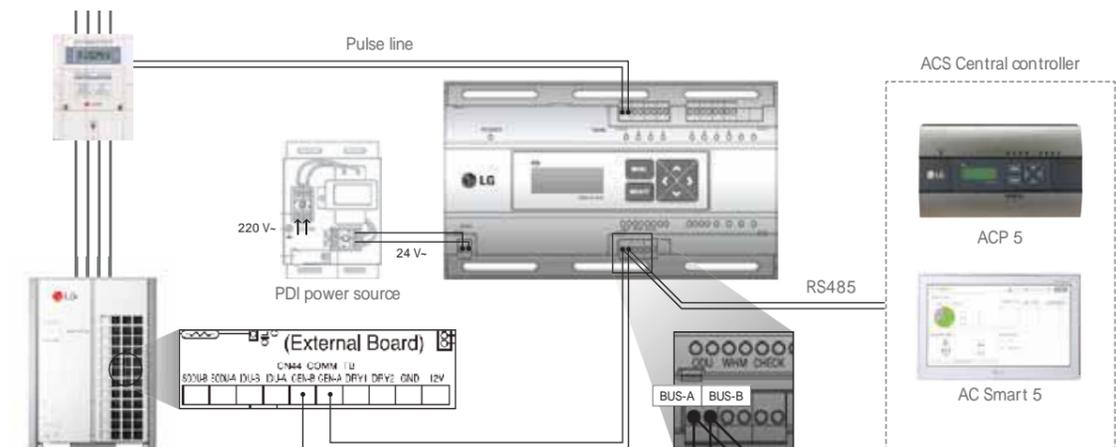

Note : 1. Power cable and type could be different from this scene depending on the Outdoor unit's specification
2. Measured power consumption could be different between PDI and Watt meter
3. Applicable Central Controller : ACP 5, ACP Lonworks, AC Smart 5, AC Ez Touch
(Combination : we recommend to connect separated watt meter for Outdoor units to have correct power distribution value)

ACS IO MODULE

This module can be connected with ACP 5 or AC Smart 5 controller if additional I/O points such as DI/DO and AI/AO for 3rd party devices control and monitoring are needed.



PEXPMB000

Model Name	PEXPMB000	
Linkable Products	PACS4B000 PACP4B000 PACS5A000 PACP5A000	
Communication	RS-485	1 ch.
I/O	Digital Input	3 port
	Digital Output	3 port
	Universal Input ¹⁾	4 port
	Analog Output	4 port


	Value Spec	Min.	Max.
Analog Input	NTC 10k	0.68k	177k
	PT 1000	803	1,573
	Ni 1000	871.7	1,675.2
	DC (Voltage)	0V	10V
Analog Output	DC (Current)	0mA	20mA
	-	0V	10V
Digital Input	Binary Input (Non Voltage)	-	-
Digital Output	Normal open	-	30VAC / 30VDC, 2A

: Applied, - : Not Applied
1) The type of UI (Universal Input) is selectable among Digital Input and Analog Input

Features & Benefit

- Interlocking with 3rd party equipment LG Central controller can make operation scenario with 3rd party equipment by ACS IO Module.
- Control coverage is expanded. (Air conditioner only Sensors, Fans, Pumps, Switches...)

Key Application

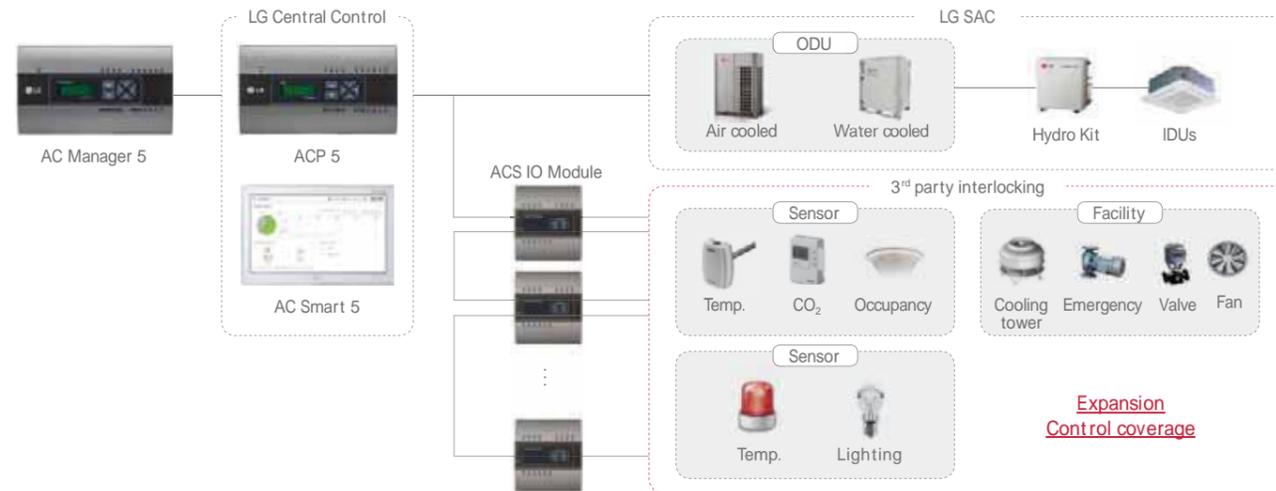

* DI : Digital Input, DO : Digital Output, UI : Universal Input, AO : Analog Output / Please contact our regional office to have connectable relay specification for analog output

ACU IO MODULE NEW

This module can be connected with ACP 5 or AC Smart 5 controller if additional I/O points such as UIO / UI / UO for 3rd party devices control and monitoring are needed.

ACU.UIO



PEXPMB300

ACU.UO



PEXPMB200

ACU.UI



PEXPMB100

Module Name	PEXPMB300	PEXPMB200	PEXPMB100
Linkable Products	PACS5A000, PACP5A000		
Communication RS-485	2 ch. ¹⁾	1 ch.	1 ch.
Digital Input	-	-	3port
Digital Output	2port	6port	-
Universal Input ²⁾	4port	-	6port
Analog Output	2port	4port	-

	Value Spec	Min.	Max.
Analog Input	DC (Voltage)	0V	10V
Analog Output	DC (Voltage)	0V	10V
Digital Input	Binary Input (Non Voltage)	-	-
Digital Output	Normal Open	-	30VDC, 1A

: Applied, - : Not Applied
1) 1ch is reserved for internal communication
2) The type of UI (Universal Input) is selectable among Digital Input and Analog Input

Features & Benefit

- Interlocking with 3rd party equipment LG Central controller can make operation scenario with 3rd party equipment by ACU IO Module.
- Control coverage is expanded. (Air conditioner only Sensors, Fans, Pumps, Switches...)

CHILLER OPTION KIT

LG central controller 5 series with Chiller Option Kit can provide LG chiller remote control and cycle monitoring.



PCHLLN000

Model Name	PCHLLN000
Monitoring Points	Evaporator status / Compressor status (Scroll, Screw, Centrifugal chiller only) / Condensor status / Generator status (Abs. chiller only)
On / Off	
Target Temp. setting	
Mode Change	Scroll chiller only
Schedule	
Interfaceable Products	Scroll, Screw, Centrifugal, Absorption (LG Only)

: Applied, - : Not Applied

Cycle Display Example



Installation Scene

- Chiller Option Kit installation of LG HVAC Solution product should be conducted by a specialized installation service engineer.
- Chiller Option Kit installation can be proceeded with a SD Card.
- The SD Card can install Chiller Option Kit in one LG HVAC Solution product.

Insert the SD Card in the LG HVAC Solution product. If a backup SD Card is inserted, replace it with a ChillerOption Kit SD Card.



DRY CONTACT

Connection between an indoor unit and external devices to control various functions.


Model Name	PDRYCB000	PDRYCB400	PDRYCB300	PDRYCB500
Case				
Input Port	1	2	8	-
Comm. Protocol	-	-	-	Modbus RTU
Power	AC 220V	Connect to Indoor unit PCB (CN_CC)		
Control	On / Off	-	-	-
	Oper Mode	-	-	-
	Set Temp.	-	(Select & Fix)	(Select & Fix)
	Aircon			
	Fan Speed	-	-	-
	Thermo-Off	-	(Select & Fix)	-
	Energy Saving	-	(Select & Fix)	-
	Lock/Unlock	-	(Select & Fix)	-
	AWHP			
	On / Off	-	-	-
	DHW On / Off	-	-	-
	Thermo-Off	-	-	-
Oper Mode	-	-	-	
Silent Mode	-	-	-	
Emergency Mode	-	-	-	
Vent				
On / Off	-	-	-	
Oper Mode	-	-	-	
Aircon Mode	-	-	-	
Additional Mode	-	-	-	
Fan Speed	-	-	-	
Output				
Operation Status	-	-	-	
Error	-	-	-	
Room Temp.	-	-	-	

- : Applied, - : Not Applied
 Note: 1. Compatibility of PDRYCB300
 - Can use with all types of aircon indoor units after 2010 (Cassette, Ducted, Convertible, Applied PAC, Wall mounted, Console)
 - Can not use with Single package models
 - AWHP : 3 series split and monobloc models
 2. Compatibility of PDRYCB400
 - Can use with all types of aircon indoor units after 2010 (Cassette, Ducted, Convertible, Applied PAC, Wall mounted, Console)
 - Can not use with single package models
 - Can not use with AWHP, Hydrokit models
 3. (Select & Fix) : This function is preset by rotary switch.

PDRYCB000




PDRYCB400

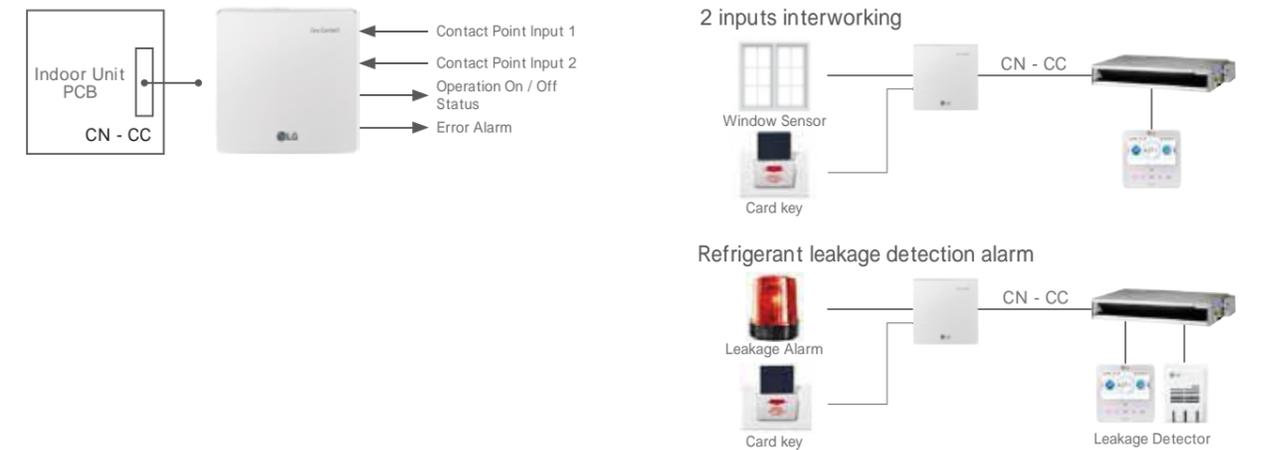

PDRYCB300



PDRYCB500

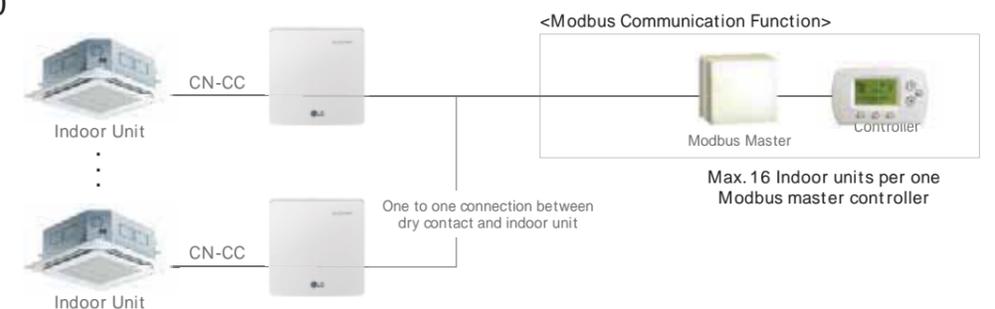

* Please contact our regional office to check the compatibility with 3rd party room controller

GROUP CONTROL WIRE


Cables used to connect a wired remote controller up to 16 indoor units.



PZCWRCG3

Model Name	PZCWRCG3
Y-type Cable	0.25m Length
Long Cable	9.6m Length

Installation Scene

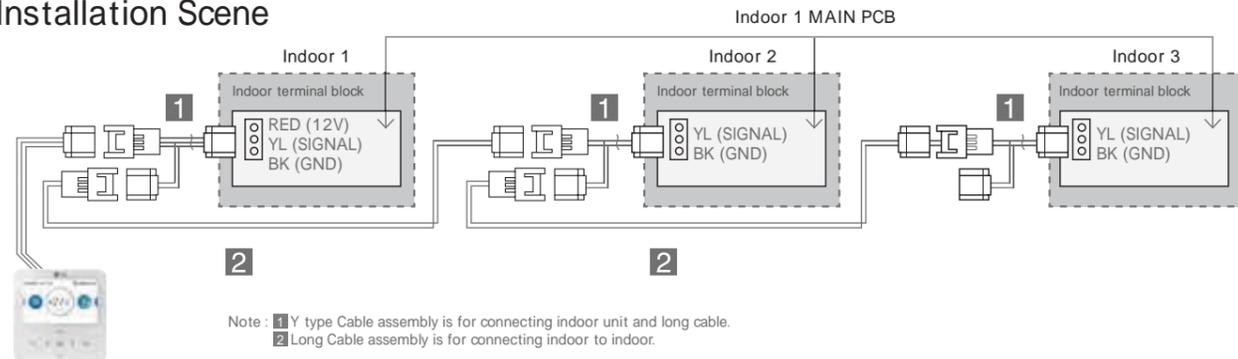

REMOTE TEMPERATURE SENSOR

Sensor for detecting the room temperature.




PQRSTA0

Features & Benefit

- It detects the exact room temperature instead of indoor unit's air temperature sensor
- Applied to Ceiling Mounted Cassette, Ceiling Concealed Duct, THERMA V and HYDRO KIT
- Extension cable (15m) is included

Installation Scene

1. Wire to the control box in the indoor unit by removing the existing thermistor and connect the extension cable its place.
2. Cut the extension cable to the appropriate length and connect the screw terminal of the remote sensor.

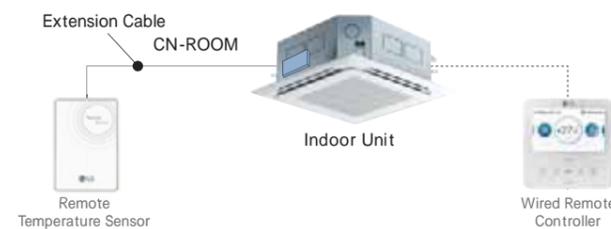

LOW PROFILE REMOTE TEMPERATURE BUTTON SENSOR

This installs easily and discreetly into a wall and then connects to indoor unit




ZRTBS01

Model Name	ZRTBS01
Operation Range	-40 to 85 (0 to 100%RH, Non-condensing)
Sensing Element	Thermistor
Sensing Element Accuracy	0.2 (0 to 70)
Material	Etched Teflon
Wire Leads	
Length	15m
Thickness	0.33mm ²
Mounting	10mm hole, push in plastic sheath with peel off tape strip
Enclosure Material Ratings	Plastic, NEMA 1, UL94

Features & Benefit


- Ideal for locations where aesthetics are as important as the temperature measurement.
- Inconspicuous wall sensor that mounts easily by pushing through a 10mm hole and secured with a peel off tape strip.
- Small flush sensor mounting.
- Accurate direct air measurement.
- Paintable with latex or oil base.

Key Application

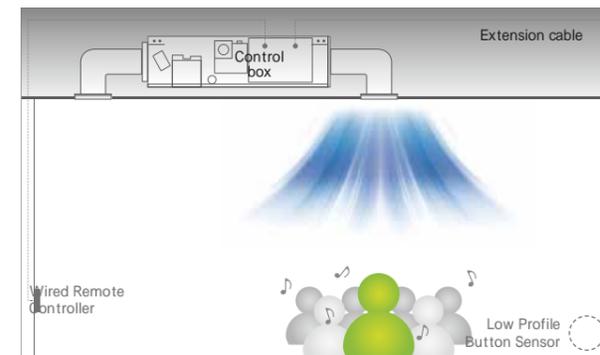


Models Applied


- LG indoor units excluding Wall-Mounted Type

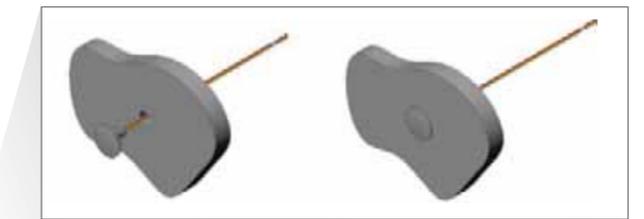

Installation Scene

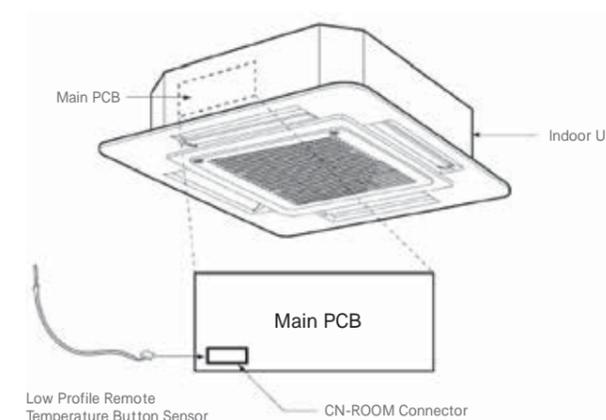


Drawing

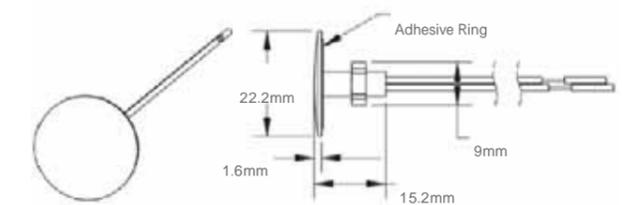


ZONE CONTROLLER

Controls air conditioning up to 4 zones by external thermostat.

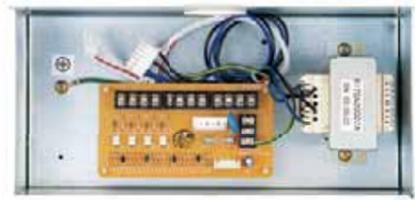

ABZCA

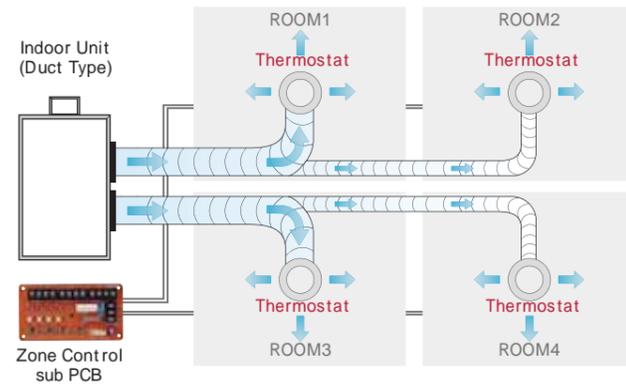


Features & Benefit

- Controls different zones (up to 4 zones) by external thermostat (AC 24V)
- Maintain proper air volume of each zone
- Auto variation of dampers
- Auto control of fan speed and On / Off operation

Models Applied

- Ceiling Concealed Duct (refer to Product Data Book for applicable models)

Wiring Diagram

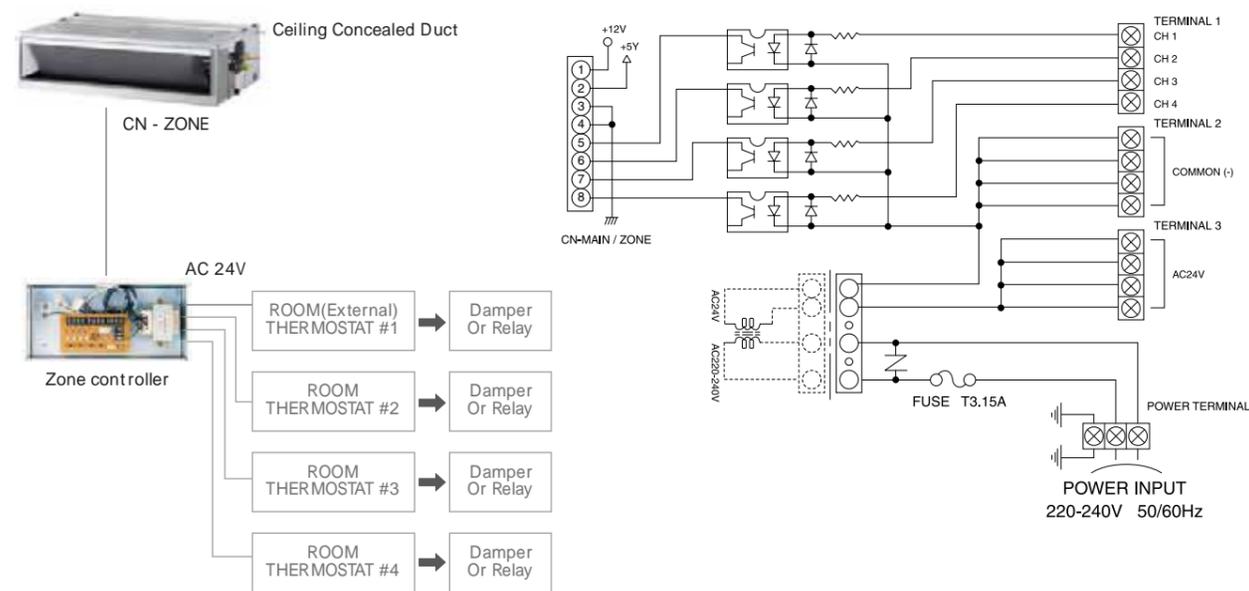

IO MODULE

Interface module between system air conditioner's outdoor unit and external device.



PVDSMN000

Features

- Demand control
- Low noise operation
- Output outdoor or indoor unit operation status
- Output error status

Description

- IO Module is communication interface module for connection between MULTI V 5 and external IO (Input / Output Module) devices.


Note : IO Module is not compatible for MULTI V III

Models Applied

- MULTI V 5
- MULTI V S
- MULTI V WATER IV

Part Description


- 1) Digital Input Part (DI : Dry Contact Input)
 - Demand control by contact input (3 Step)
 - Low Noise Operation input
 - Priority Setting input : Setting the priority of demand control command (Capacity control for external signal from DDC vs Peak control by LG Central controller)
 - Open : External signal has priority to central controller (Default)
 - Close : Central controller has priority to external signal
- 2) Analog Input Part (AI : DC 0 ~ 10V)
 - Demand control by analog input (10 Step)
- 3) Digital Output Part (DO : AC 250V, Max. 1A)
 - Error status relay output
 - Operation status relay output
 - Valve control



Key Application


Demand Control

Provides variable setting for demand control according to input method to reduce power consumption. This function supports 2 types of input signal : AI (0 ~ 10V, 10 Step) and contact signal (3 Step).

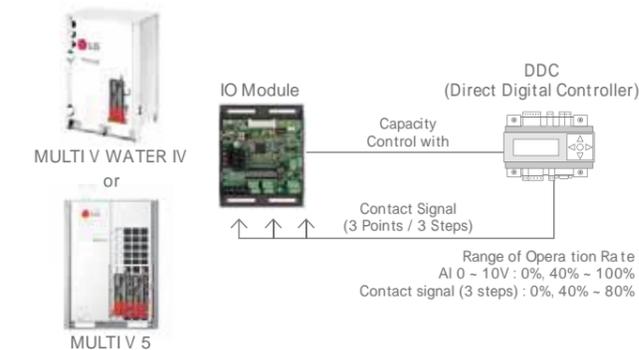


Low Noise Operation

To reduce noise level, control outdoor unit's fan speed by dry contact input.

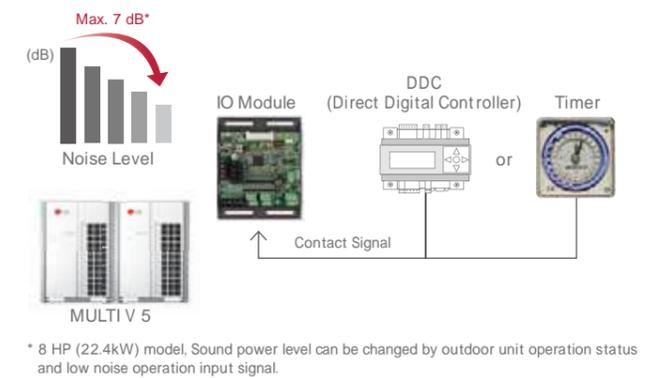

Refrigerant Leakage detection with Pump-down

For safety, IO module close refrigerant valve when Pump-down operation.

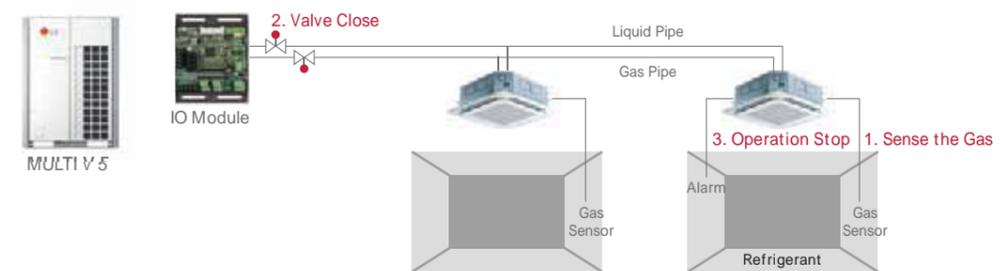

VARIABLE WATER FLOW CONTROL KIT

Accessory developed for controlling the water flow.



PWFCKN000
(MULTI V WATER IV)

Features


Function

- Water pump or valve control (0 ~ 10V)
- Minimum output voltage setting available
- Operation, error output (AC 250V, Max. 1A)
- Dry contact input and analog output for demand control
- Digital output for operation, error status (AC 250V, Max. 1A)

Advantage

- Water flow consumption reduction
- Pump electricity consumption reduction
- Including IO Module (Dry contact input, Analog input / output, Digital output)
: Using Dry contact and variable water flow control function simultaneously

Wiring Diagram

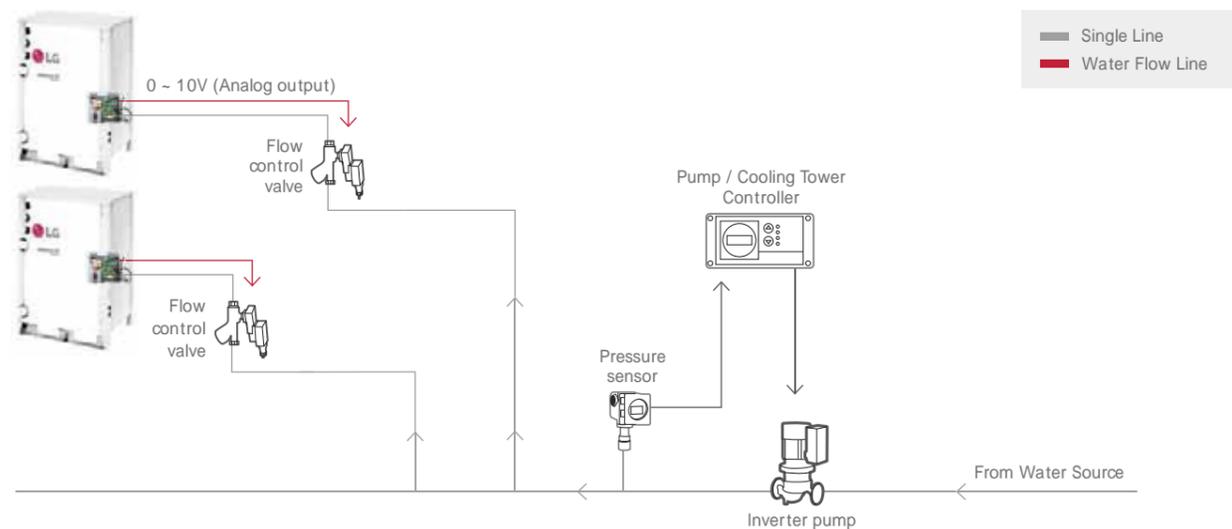

- Flow control valve : Regulates the flow or pressure of a fluid, normally responding to signals generated by independent devices.
- Flow Meter : Measures mass flow rate of a fluid traveling through a tube. (The mass flow rate is the mass of the fluid traveling past a fixed point per unit time.)
- Pressure Sensor : Measures the pressure.

LOW AMBIENT KIT

External integration module for cooling operation with -25°C low ambient temperature.



PRVC2


Features

Function

- 25°C Low ambient cooling operation by Low ambient kit and hood with damper (Analog output 0 ~ 10V)
- Demand contro
- Low noise operation
- Output outdoor or indoor unit operation status (AC 250V, Max. 1A)
- Output error status (AC 250V, Max. 1A)

Description

- Low ambient kit supports -25° C cooling operation by making stable condensing pressure with reducing air flow rate from hood and damper control given 0 ~ 10V proportional to condensing pressure.
- Low ambient kit provides IO Module function.
- External snow hood and air damper are required for this item.
- Transformer and terminal block are included.

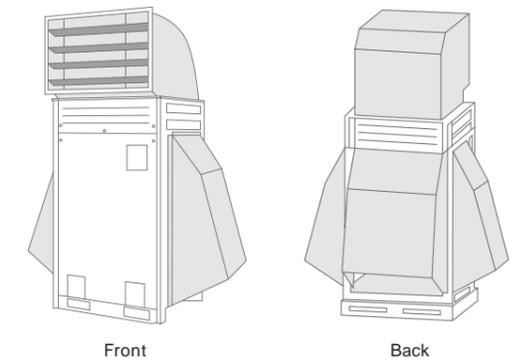


□ : Field Supply item

Models Applied

- MULTI V 5
- MULTI V IV

Installation Scene

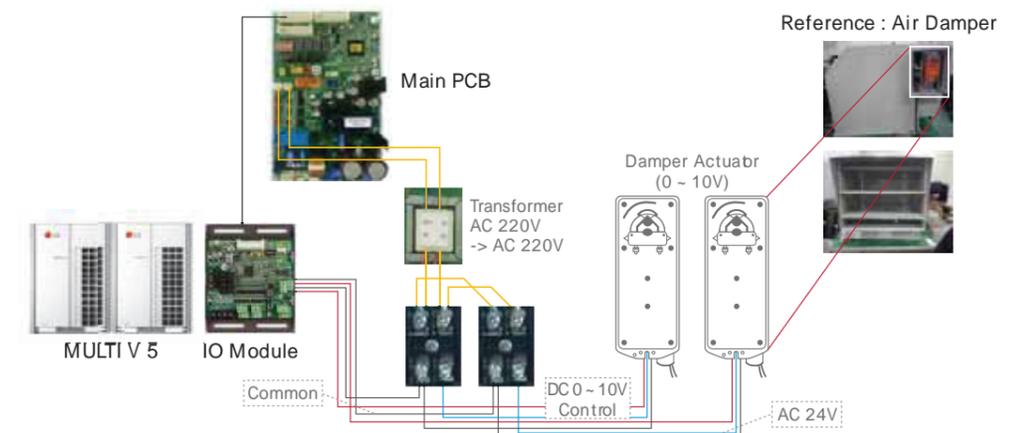

Note : The IO Module can control maximum three actuators. Please, review damper actuator's installation manual.

COOL / HEAT SELECTOR


Cooling, heating, or fan mode can be selected to prevent cooling and heating mixing errors during seasonal changes.



PRDSBM

Features


- Indoor unit mode control without central controller
- Select operation mode : Cooling, Heating, Fan mode
- Mode lock for cooling & heating mixing error-proof during the change of season

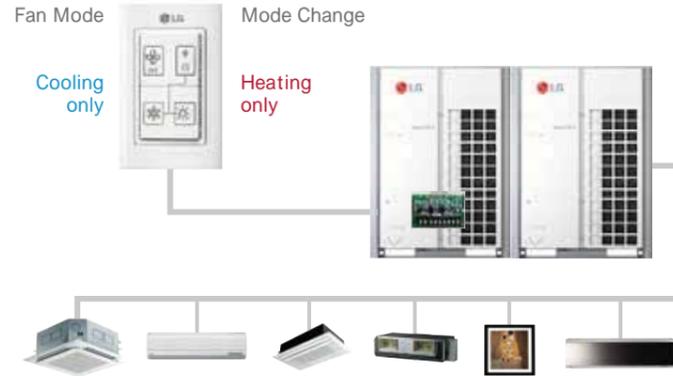

Models Applied

- MULTI V 5
- MULTI V WATER II
- MULTI V PLUS II, MULTI V PLUS
- MULTI V IV
- MULTI V S
- MULTI V WATER IV

Wiring Diagram

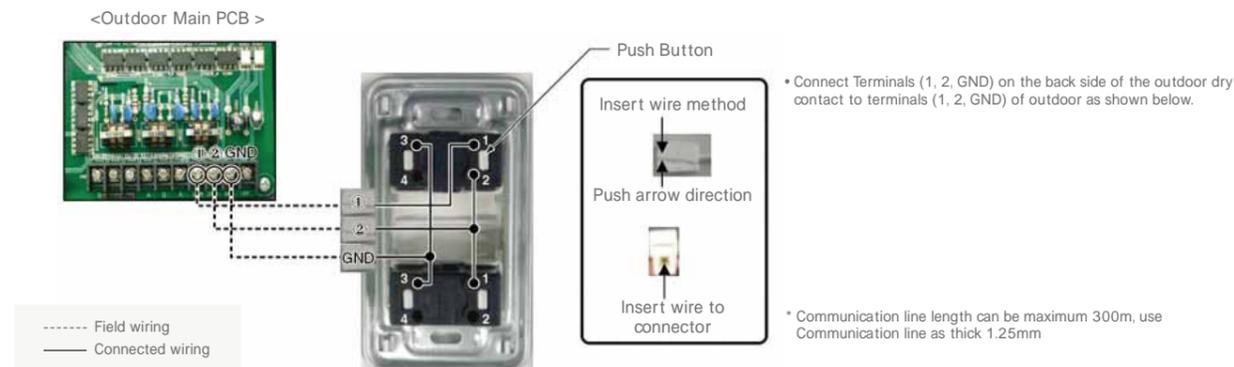

AHU KITS

A solution to connect LG's high efficiency system to the DX coil of an air handling unit for the maximum energy savings.



Specifications

Communication & Control Kit

Type	Model	Combination				Description	Dimensions (mm)		
		Outdoor Unit	EEV Kit	TXV Kit	Centralized Controller		W	H	D
Communication kit	PAHCMR000	Multi V				Return / Room air temperature control by DDC or LG individual / centralized controller	300	300	155
		Single Split	-	-					
	PAHCMS000	Multi V				Discharge air temperature control by DDC or LG individual / centralized controller	380	300	155
		Single Split	-	-					
Control kit	PRCKD21E	Multi V	-			Max. capacity 1 - 4 master outdoor unit	600	750	285
		Multi V	-			Max. capacity 5 - 8 master outdoor unit	600	750	285

: Applied, - : Not Applied

Expansion Valves

Type	Model	Capacity Range	Pipe Diameter (mm)				Dimensions (mm)		
			Liquid (ODU)	Liquid (AHU)	Gas (ODU)	Gas (AHU)	W	H	D
EEV Kit (Electronic Expansion Valve)	PRLK048A0	1.3 - 10 HP	12.7	12.7	-	-	217	404	83
	PRLK096A0	12 - 20HP	12.7	12.7	-	-	217	404	83
TXV Kit (Thermal Expansion Valve)	PATX13A0E	8 - 16HP	15.88	15.88	22.22	22.22	491	238	174
	PATX20A0E	18 - 26HP	15.88	22.22	28.58	28.58	491	238	174
	PATX25A0E	28 - 36HP	22.22	28.58	34.92	34.92	491	238	174
	PATX35A0E	38 - 46HP	28.58	34.92	41.3	41.3	491	238	174
	PATX50A0E	48 - 56HP	28.58	34.92	41.3	41.3	561	291	192

: Applied, - : Not Applied

AHU KITS

Communication Kit

HIGH ENERGY EFFICIENCY

LG's DX AHU solutions are capable of performing all indoor air conditioning tasks with success under all operating conditions thanks to their superior performance with high efficiency heat source system.

Solution benefits offer the following advantages:


- High energy efficiency inverter system
- Large range of expansion valves
: 1.3 ~ 20 HP EEV Kit, 8 ~ 56 HP TXV Kit
- Connected to various heat sources
: MULTI V, MULTI V WATER, MULTI V S, SINGLE SPLIT



DIVERSE OPTIONS FOR CONTROL

AHU communication kit can be connected to various control system such as LG individual/central controller and DDC¹⁾. It can be directly connected to DDC without separated controller, so DDC can receive product control and monitor information through contact signal or Modbus protocol.

- LG Individual/Central controller supported
 - LG controller stand alone or combination with DDC
- Direct wiring between DDC and AHU communication kit
 - Embedded Digital I/O and Analog Input
 - Modbus RTU protocol supported

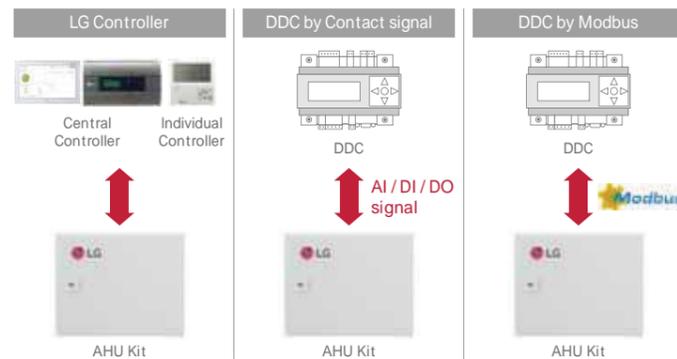


1) DDC : Direct Digital Controller

EXPANDABLE SYSTEM DESIGN



LG AHU system can be a suitable solution for various sites due to its application flexibility and wide range of line up with large capacity models. According to the required capacity, a single or multiple module combination is possible thanks to AHU communication kit's modular design.

- Multiple module combination for large capacity AHU


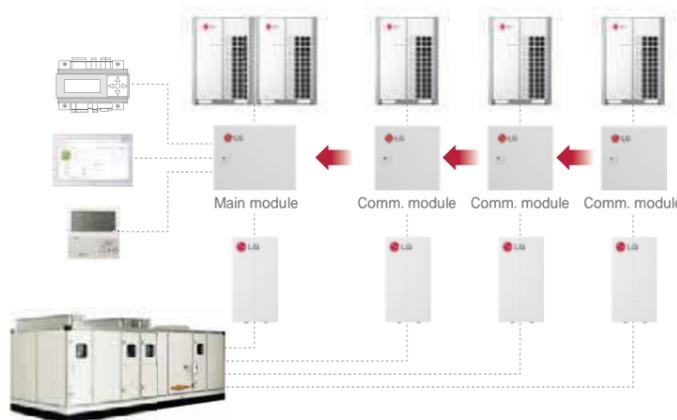


Communication Kit Application

Small Capacity with Single Split + Return / Room Air Temperature Control

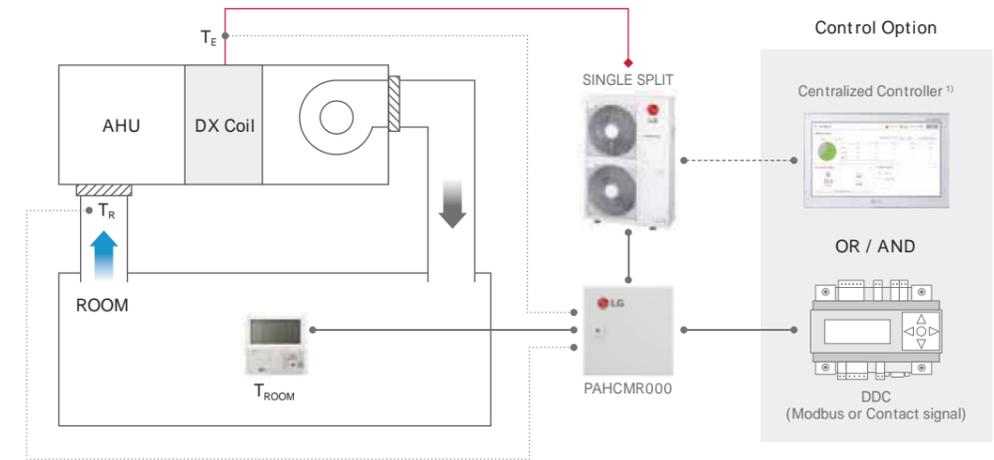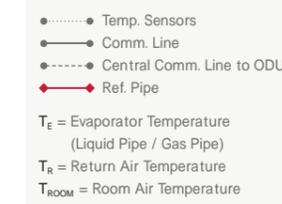

Small Capacity with Single Split + Discharge Air Temperature Control

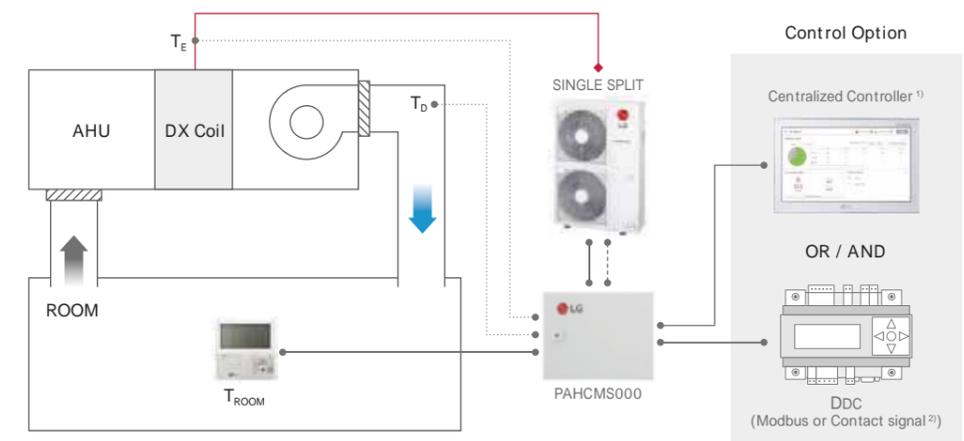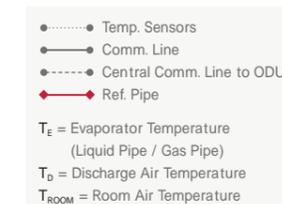


1) PI485 (PMNFP14A1) is required for centralized controller

2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC
Note : For more detail, please refer to the PDB

AHU KITS


Communication Kit Application

Small-Medium Capacity with Multi V + EEV Kit + IDU + Return / Room Air Temperature Control

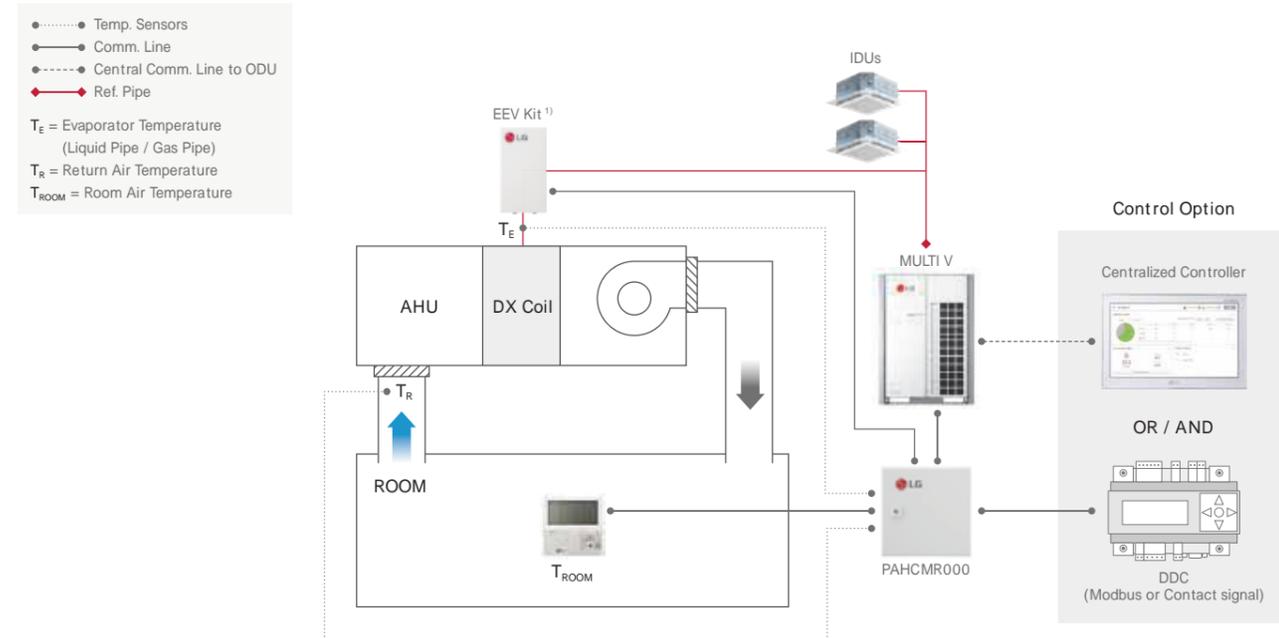


Communication Kit Application


Large Capacity with Multi V + TXV Kit + Return / Room Air Temperature Control

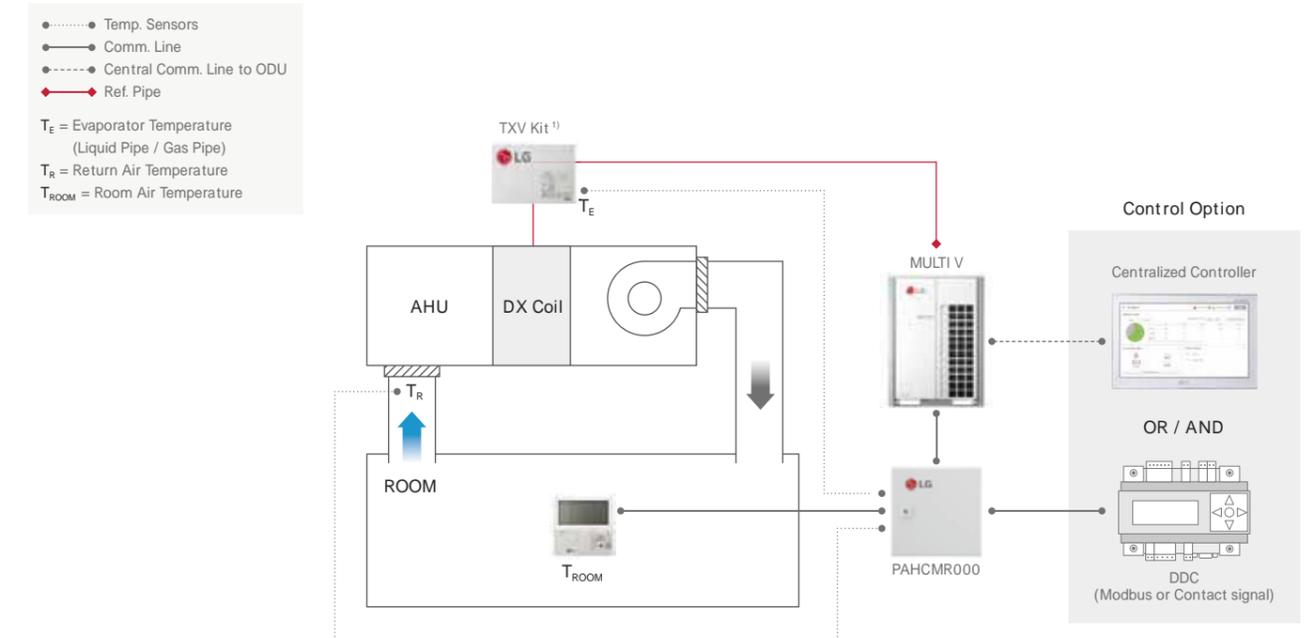

Small-Medium Capacity with Multi V + EEV Kit + Discharge Air Temperature Control

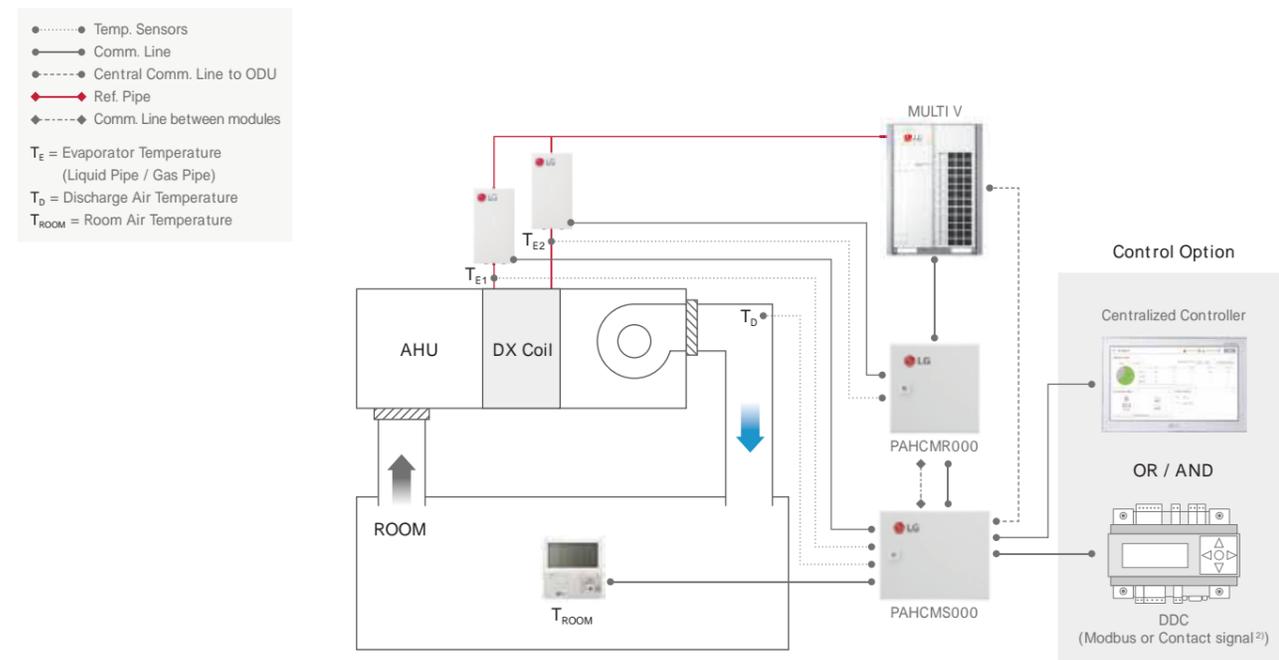

Large Capacity with Multi V + TXV Kit + Discharge Air Temperature Control

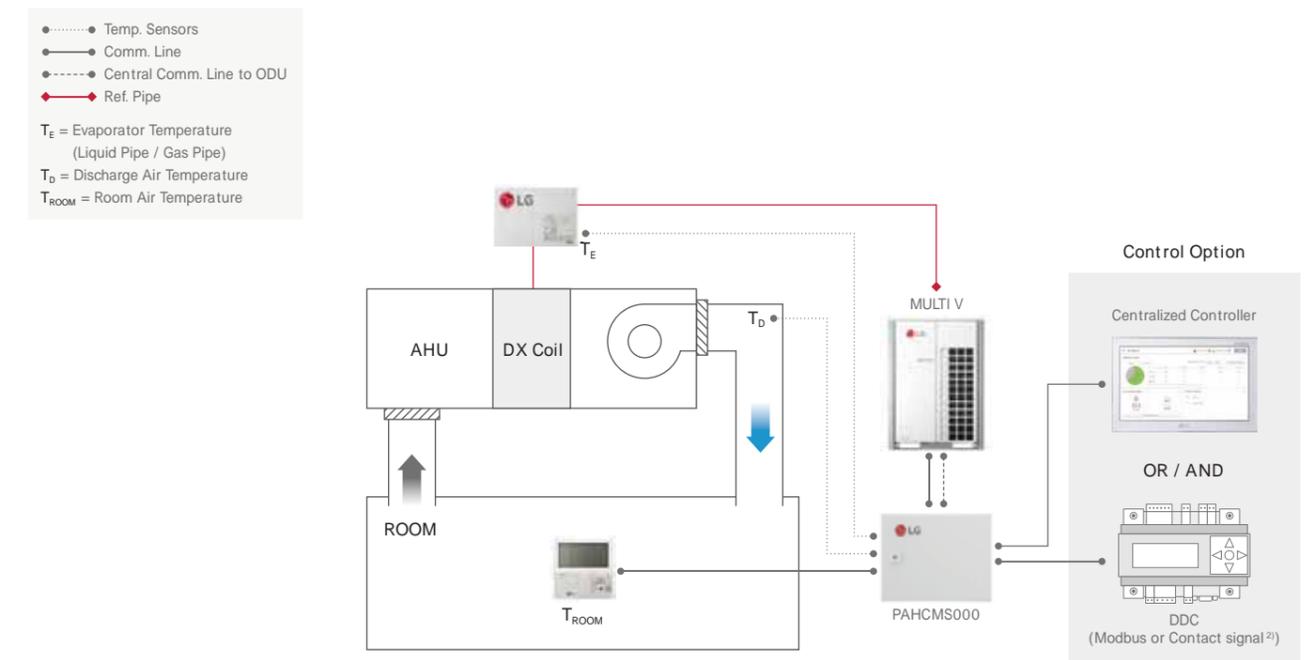

1) Multiple EEV kits can be applicable with multiple DX Coils and PAHCMR000s
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC
 Note: For more detail, please refer to the PDB

1) TXV Kit should be connected with outdoor unit 1:1
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC
 Note: For more detail, please refer to the PDB

Communication Kit Function

Communication with DDC via Contact Signal

Function List	PAHCMR000	PAHCMS000	Type	Electric Spec.
Comm. Kit Operation	On / Off		Digital Input	Non voltage
Operation Mode ¹⁾	Cooling / Heating		Digital Input	Non voltage
Return (room) Air Temperature ²⁾	16 ~ 30°C	-	Analog Input	DC 0 ~ 10V / 20mA
Discharge Air Temperature ³⁾	-	-	-	-
Fan Speed ⁴⁾	-	Low / Middle / High	Digital Input	Non voltage
Forced Thermal On / Off	On / Off	-	Digital Input	Non voltage
Capacity Control	-	-	Analog Input	DC 0 ~ 10V / 20mA
Comm. Kit Operation ²⁾	On / Off		Digital Output	Max. : DC 12V / 1A, AC 250V / 3A
Operation Mode	-	-	-	It needs to be checked through control signal
Return (room) Air Temperature	-	-	-	-
Discharge Air Temperature	-	-	-	-
Fan Speed ²⁾	Low / Middle / High	-	Digital Output	Max. : DC 12V / 1A, AC 250V / 3A
Defrost Operation ²⁾	Defrost / Normal	-	Digital Output	Max. : DC 12V / 1A, AC 250V / 3A
Error Alarm ²⁾	Error / Normal	-	Digital Output	Relay C contact (Max. : DC 30V / 5A, AC 250V / 5A)
Compressor On / Off	-	On / Off	Digital Output	Max. : DC 12V / 1A, AC 250V / 3A

: Applied, - : Not Applied

1) Available operation mode can be varied depending on the setting of Communication Kit

2) This function may not be possible depending on the setting of Communication Kit. For more details, please refer to the product data book

3) Discharge air temperature should be controlled directly through DDC

4) To control the fan speed using contact signal, DO ports for the status of fan speed needs to be connected with the fan unit

Communication with DDC via Modbus protocol

Function List	PAHCMR000	PAHCMS000	Note
Comm. Kit Operation	On / Off		-
Operation Mode ¹⁾	Cooling / Heating		-
Return (room) Air Temperature	16 ~ 30°C	-	-
Discharge Air Temperature	-	16 ~ 30°C	-
Fan Speed ²⁾	Low / Middle / High	-	-
Forced Thermal On / Off	-	-	-
Capacity Control	-	-	-
Comm. Kit Operation	On / Off		-
Operation Mode ¹⁾	Cooling / Heating		-
Return (room) Air Temperature	-50 ~ 100°C	-	Corresponding air temperature sensor connected to AHU comm. kit is required
Discharge Air Temperature	-	-50 ~ 100°C	-
Fan Speed	Low / Middle / High	-	-
Defrost Operation	On / Off		-
Error Alarm	Error Alarm & Code		-
Compressor On / Off	On / Off		-

: Applied, - : Not Applied

1) Available operation mode can be varied depending on the setting of Communication Kit

2) To control the fan speed using Modbus, DO ports for the status of fan speed needs to be connected with the fan unit

Note : For the Modbus memory map, please refer to the product data book

Communication Kit Function

With LG Control system (Individual & Centralized Controller)

Function List	PAHCMR000	PAHCMS000	Note
Comm. Kit Operation	On / Off	On / Off	-
Operation Mode ¹⁾	Cooling / Heating	Cooling / Heating	-
Return (room) Air Temperature	16~30°C	-	-
Discharge Air Temperature ²⁾	-	16 ~ 30°C	-
Fan Speed ³⁾	Low / Middle / High	-	-
Forced Thermal On / Off	-	-	-
Capacity Control	-	-	-
Comm. Kit Operation	On / Off	On / Off	-
Operation Mode ¹⁾	Cooling / Heating	Cooling / Heating	-
Return (room) Air Temperature	11~39.5°C / -50~100°C	-	By Individual controller : 11 ~ 39.5°C By Centralized controller : -50 ~ 100°C
Discharge Air Temperature	-	-50 ~ 100°C	Only with Centralized Controller
Fan Speed ³⁾	Low / Middle / High	-	-
Defrost Operation	On / Off	On / Off	Only with Individual Controller
Error Alarm	Error Code	Error Code	-
Compressor On / Off	On / Off	On / Off	Only with Individual Controller

: Applied, - : Not Applied

1) Available operation mode can be varied depending on the setting of Communication Kit. For more details, please refer to the product data book

2) This range may differ depending on the type of controller

3) To control the fan speed using contact signal, DO ports for the status of fan speed needs to be connected with the fan unit

Note : Control function is unavailable in case of using together with DDC via contact signal

Compatibility with LG HVAC Controllers

Controller	Individual Controller			Centralized Controller					BMS Gateway	PDI
	Premium	Standard III	Standard II	AC Ez	AC Ez Touch	AC Smart 5	ACP 5	AC Manager 5 ¹⁾	ACP Lonworks	Premium Standard
										
Model no.	PREMTA000 PREMTA000A PREMTA000B	PREMTB100 PREMTBB10	PREMTB001	PQCSZ250S0	PACEZA000	PACS5A000	PACP5A000	PACM5A000	PLNWKB000	PQNUD1S40 PPWRDB000
PAHCMR000	-	-	-	-	-	-	-	-	-	-
PAHCMS000	-	-	2)	-	-	-	-	-	-	-

: Applied, - : Not Applied

1) AC Manager 5 is an integrator, so the installation with AC Smart 5 or ACP 5 is required

2) Set temperature range of this model shall be extended in the future

Note : 1. Dry contact for indoor unit (PDRYCB000 / 400 / 300 / 500) is not applied

2. For more details, please refer to the product data book

AHU KITS

Communication Kit Function

Outdoor Unit Compatibility

Multi V

Model		MULTI V				MULTI V WATER		
		5	IV	III	S	IV	II	S
AHU Controller	PAHCMR000							
	PAHCMS000							-

Single Split

		Standard Inverter (1-phase)						
Capacity	Cooling kW	4.7	7.7	8.0	10.0	12.5	13.9	14.6
	Heating kW	5.5	8.0	9.0	11.0	14.0	15.4	16.9
AHU Kit	PAHCMR000							
	PAHCMS000				-	-	-	-

		Standard Inverter (3-phase)						
Capacity	Cooling kW	10.0	12.5	13.9	14.6	19.0	23.0	
	Heating kW	11.0	14.0	15.4	16.9	22.4	27.0	
AHU Kit	PAHCMR000							
	PAHCMS000	-	-	-	-	-	-	-

: Applied, - : Not Applied
 Note: 1. Table of the outdoor unit compatibility is based on European regional model.
 2. When connecting outdoor units in other areas, please check whether they are compatible or not.

Expansion valves for MULTI V system

EEV Kit	PRLK048A0															PRLK096A0				
	1.3	1.6	2	2.5	3	3.5	4	5	6	8	10	12	14	16	18	20				
HP	3.6	4.5	5.6	7.1	8.2	10.6	12.3	14.1	15.8	22.4	28	33.6	39.2	44.8	50.4	56				
Cooling (kW)	4	5	6.3	8	9.2	11.9	13.8	15.9	18	25.2	31.5	37.8	44.1	50.4	56.7	63				
Heating (kW)																				

TXV Kit	PATX20A0E				PATX25A0E				PATX35A0E				PATX50A0E							
	PATX13A0E																			
HP	8 ~ 16				18 ~ 26				28 ~ 36				38 ~ 46				48 ~ 56			
Cooling (kW)	22.4 ~ 44.8				50.4 ~ 72.8				78.4 ~ 100.8				106.4 ~ 128.8				134.4 ~ 156.8			
Heating (kW)	25.2 ~ 50.4				56.7 ~ 81.9				88.2 ~ 112.1				118.4 ~ 143.6				148.5 ~ 175.1			

* Capacities are based on the following conditions :
 - Cooling : Indoor 27°C (80.6°F) DB / 19°C (66.2°F) WB Outdoor 35°C (95°F) DB / 24°C (75.2°F) WB
 Condensing temperature (tc) 46°C, Evaporating temperature (te) 6°C
 - Heating : Indoor 20°C (68°F) DB / 15°C (59°F) WB Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB
 Hot gas inlet temperature 70°C, Condensing temperature (tc) 46°C
 - Piping Length : Interconnected Pipe Length = 7.5m
 - Difference Limit of Elevation (Outdoor ~ Indoor Unit) is zero

Control Kit

List	Required Item
Heating / Cooling	SA / RA temperature sensor (or SA / RA temperature & humidity sensor)
Automatic Ventilation	SA / RA temperature, CO ₂ sensor, Damper actuator (OA, EA, MA)
Energy Saving (Cooling Mode Only)	SA temperature, OA / RA temp&humidity sensor, Damper actuator (OA, EA, MA)
Humidification	SA temperature, RA temperature & humidity sensor, Humidifier
Inverter Fan Control	SA / RA temperature, Static pressure sensor, Inverter driver for fan control
Filter Alarm	Difference pressure sensor
Smoke Detecting	Smoke detection sensor


RA : Return Air, EA : Exhaust Air, OA : Outdoor Air, SA : Supply Air, MA : Mix air (RA + OA)

Field Supplied Item

List	Required Specification	Apply Location
Temperature Sensor	- Power : AC 24V, Output signal : DC 0 ~ 10V - Temperature boundary : -50 ~ 50°C	- Apply to MA, SA, RA
Temperature & Humidity Sensor	- Power : AC 24V, Output signal : DC 0 ~ 10V - Temperature boundary : -40 ~ 70°C - Humidity boundary : 0 ~ 95% RH	- Apply to SA, RA, OA - Can not be applied to MA
Damper Actuator	- Power : AC 24V, In/Output signal : DC 0 ~ 10V - Torque : 15 Nm, Operation time : 150sec. - Rotation angle : 90°	- Apply to OA, EA, MA damper
Difference Pressure Sensor (for Filter)	- Power : AC 24V, Output signal : DC 0 ~ 10V * Boundary : 0 ~ 1000Pa - Switch type : Relay Open / Close	- Apply to filter
Static Pressure Sensor	- Power : AC 24V, Output signal : DC 0 ~ 10V - Boundary : 0 ~ 1000pa	- Apply to SA (for inverter control)
CO ₂ Sensor	- Power : AC 24V, Output signal : DC 0 ~ 10V - Boundary : 0 ~ 2000ppm	- Apply to RA duct
Smoke Detection Sensor	- Power : AC 24V, From : Contact point type	- Apply to RA duct

Note : Boundary of specification can be changed through LGAV software. However, please make a specification referring to the above table

Various Control with Control kit – Multiple MULTI V + TXV Kits

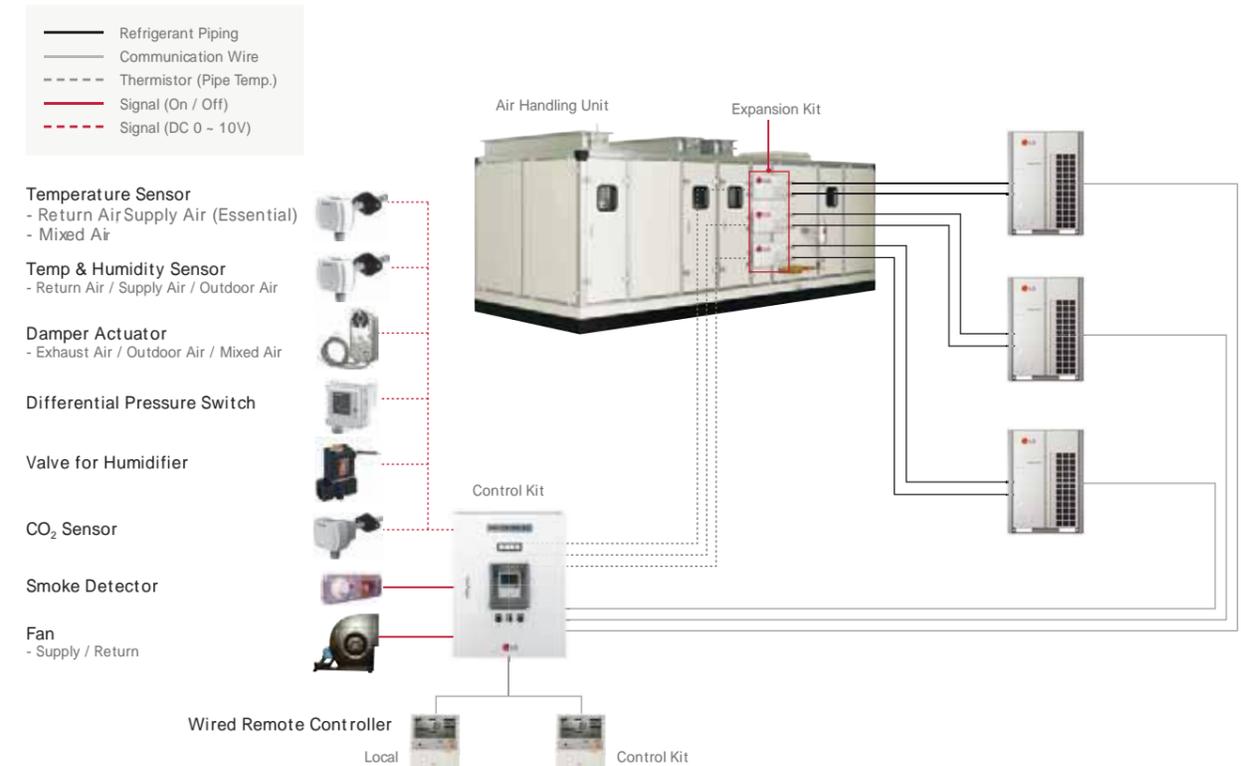

HOTEL

Hotel Control Solution



Guest Rooms

The air conditioner automatically turn off when guests leave

Integrated control of air conditioner with the hotel room controller

Control the air conditioner with an existing hotel thermostat

Guest safety is the first priority

Reception

Air conditioner control in conjunction with check-in or check out

Public Areas

Centralized management of the public areas

 Dry contact

 Dry contact

 Dry contact For thermostat

 Refrigerant Leak detector

 AC Smart 5 (Schedule)

Hotel Proposal / Design

Guest Room				Lobby
<p>The air conditioner automatically turn off when guests leave</p>  <p>PDRYCB400 2 contact point</p> <p>Input</p> <ul style="list-style-type: none"> Operation On / Off <p>Output</p> <ul style="list-style-type: none"> Operation On / Off status Error alarm 	<p>Integrated control of air conditioner with the hotel room controller</p>  <p>PDRYCB500 Modbus RTU(9,600bps)</p> <p>Function</p> <ul style="list-style-type: none"> Operation Indoor temperature Error alarm Set run mode Set temperature Set fan speed 	<p>Control with existing hotel thermostat</p>  <p>PDRYCB300 8 contact point</p> <p>Input</p> <ul style="list-style-type: none"> Operation On / Off Thermo On / Off Operation mode (Fan / Heat / Cool) Fan speed (Low / Middle / High) <p>Output</p> <ul style="list-style-type: none"> Operation On / Off status Error alarm 	<p>Guest safety is the first priority</p>  <p>PRLDNVS0 Refrigerant leakage detector</p> <ul style="list-style-type: none"> 6000ppm  <p>PREMTB100 Wired remote controller</p> <ul style="list-style-type: none"> 4.3 inch color LCD Touch button 	<p>Air conditioner control in conjunction with check-in or check out</p>  <p>PACS5A000 AC Smart 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP)  <p>PACP5A000 ACP 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP)

SHOPPING MALL

Shopping Mall Control Solution



Retail

Rationally distribute and manage the power consumption by tenants

Fast problem detection and alarms

Maintenance Office

Reduces energy by checking operational trends

Atrium

Integrated management of AHU applied to large spaces

Chiller and VRF integrated control

 PDI





 Central controller (Operation trend)

 Central controller (Operation trend)

 Comm. Kit

 Central controller (Operation trend) +  Chiller option kit

Shopping Mall Reference

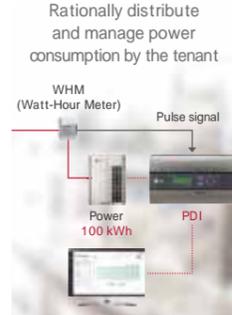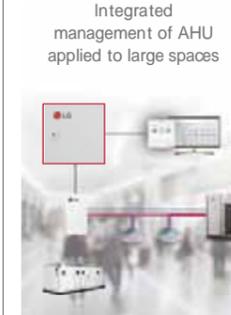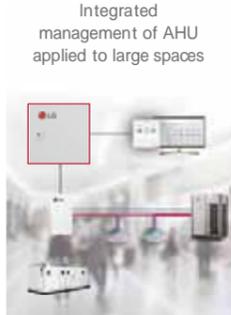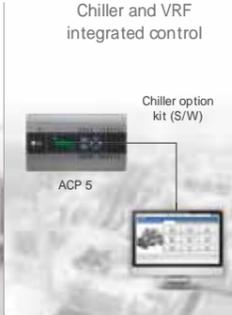Retail	Maintenance Office	Atrium
<p>Rationally distribute and manage power consumption by the tenant</p>  <p>PPWRDB000 PDI Standard (2 port)</p> <ul style="list-style-type: none"> Max. 128 IDU  <p>PQNUD1S40 PDI Premium (8 port)</p> <ul style="list-style-type: none"> Max. 128 IDU 	<p>Fast problem detection and alarms</p>  <p>PACS5A000 AC Smart 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP)  <p>PACP5A000 ACP 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP) 	<p>Integrated management of AHU applied to large spaces</p>  <p>PAHCMR000 AHU Comm. Kit</p> <ul style="list-style-type: none"> Return air  <p>PAHCMS000 AHU Comm. Kit</p> <ul style="list-style-type: none"> Discharge air
		<p>Chiller and VRF integrated control</p>  <p>PCHLLN000 Chiller option kit</p> <p>+ PACP5A000 ACP 5 + PACP5A000 AC Smart 5</p>

HOSPITAL

Hospital Control Solution

Hospital Ward

- Proper airflow management for patients
Wired remote controller
- Monitor the comfort level for each hospital ward
Central controller (Comfort level)
- Control fan speed and air volume
Dry contact

Service Zone

- Energy savings based on flexible scheduling
Central controller (Schedule)

Lobby

- Centralized management of AHU for large spaces
Comm. Kit

Hospital Proposal / Design

Hospital Ward			Service Zone	Lobby
Proper airflow management for patients	Monitor the comfort level for each hospital ward	External device interlock control	Energy savings based on flexible scheduling	Centralized management of AHU for large space
PTVSM A0 Human detection sensor	PACS5A000 AC Smart 5	PDRYCB400 2 contact point	PACS5A000 AC Smart 5	PAHCMR000 AHU Comm. Kit
		Input • Operation On / Off		
PREMTB100 Wired remote controller	PACP5A000 ACP 5	Output • Operation On / Off status • Error alarm	PACP5A000 ACP 5	PAHCMS000 AHU Comm. Kit
• 4.3 inch color LCD • Touch button	• BMS Integration (BACnet IP, Modbus TCP)		• BMS Integration (BACnet IP, Modbus TCP)	• Return air
	• BMS Integration (BACnet IP, Modbus TCP)		• BMS Integration (BACnet IP, Modbus TCP)	• Discharge air

EDUCATION

Education Control Solution

Class Room

- Automatically save energy in the absence of students
Wired remote controller
- Central controls prevent students from arbitrary control
Central controller (Lock)

Lecture Room

- Schedule management according to academic plan
Central controller (Schedule)

Maintenance Office

- Integrated management of distributed buildings
Central controller (Multiple management)
- Centralized management with multiple interfaces
Central controller (HTML5)

Education Proposal / Design

Class Room		Lecture Room	Maintenance Office	
Automatically save energy in the absence of students	Central controls prevent students from arbitrary control	Schedule management according to academic plan	Integrated management of distributed buildings	Centralized management with multiple interfaces
PTVSM A0 Human detection sensor	PREMTB100 Wired remote controller	PACS5A000 AC Smart 5	PACP5A000 ACP 5	PACM5A000 AC Manager 5
	• 4.3 inch color LCD • Touch button	• BMS Integration (BACnet IP, Modbus TCP)	• BMS Integration (BACnet IP, Modbus TCP)	

OFFICE

Office Control Solution

<p>Maintenance Office</p> <p>Energy savings and management throughout the building</p> <p>Integrated management of HVAC with BMS system</p> <p>Reduce costs by replacing BMS</p>	<p>Central controller (Energy Nav)</p> <p>Central controller (BMS Gateway)</p> <p>Central controller (Operation trend) + ACS IO Module</p>
<p>Office Room</p> <p>Reasonable power distribution to tenants</p>	<p>PCI</p>
<p>Server Room</p> <p>Main equipment 24 hours back up management</p>	<p>Central controller (Backup operation)</p>
<p>Meeting Room</p> <p>Energy savings based on occupancy detection</p>	<p>Wired remote controller</p>

Office Proposal / Design

Maintenance Office	Office Room	Server Room	Meeting Room
<p>Energy savings and management throughout the building</p> <p>Integrated management of HVAC with BMS system</p> <p>Reduce costs by replacing BMS</p>	<p>Reasonable power distribution to tenants</p>	<p>Main equipment 24 hours back up management</p>	<p>Energy savings based on occupancy detection</p>
<p>PACS5A000 AC Smart 5</p> <p>PLNWKB000 LonWorks gateway</p> <p>PEXPMB000 ACS IO Module</p>	<p>PPWRDB000 PDI Standard (2 port)</p>	<p>PACS5A000 AC Smart 5</p>	<p>PTVSM40 Human detection sensor</p>
<p>• BMS Integration (BACnet IP, Modbus TCP)</p>	<p>• Max. 128 IDU</p>	<p>• BMS Integration (BACnet IP, Modbus TCP)</p>	<p>• Human detection sensor</p>
<p>PACP5A000 ACP 5</p> <p>PMBUSB00A Modbus RTU gateway</p> <p>PEXPM300 PEXPM200 PEXPM100 ACU IO Module</p>	<p>PQNUD1S40 PDI Premium (8 port)</p>	<p>PACP5A000 ACP 5</p>	<p>PREMTB100 Wired remote controller</p>
<p>• BMS Integration (BACnet IP, Modbus TCP)</p>	<p>• Max. 128 IDU</p>	<p>• BMS Integration (BACnet IP, Modbus TCP)</p>	<p>• 4.3 inch color LCD</p> <p>• Touch button</p>

RESIDENTIAL

Residential Control Solution

<p>Home</p> <p>Control your home air conditioner anytime, anywhere</p>	<p>Wi-Fi Modem</p>
<p>Living Room</p> <p>Build a smart house</p>	<p>Modbus RTU</p>
<p>Bed Room</p> <p>Use a familiar residential thermostat</p>	<p>Dry contact For thermostat</p>
<p>Apartment / Residence</p> <p>Stable system operation</p>	<p>Wired remote controller</p> <p>Independent power module</p>

Residential Proposal / Design

Home	Living Room	Bed Room	Apartment
<p>Control your home air conditioner anytime, anywhere</p>	<p>Build a Smart house</p>	<p>Use a familiar residential thermostat</p>	<p>Stable system operation when indoor unit power is lost</p>
<p>PWFMD200 LG Wi-Fi modem</p>	<p>PDRYCB500 Modbus RTU (9,600bps)</p>	<p>PDRYCB300 8 contact point</p>	<p>PRIP0 Independent power module</p>
<p>Function</p> <ul style="list-style-type: none"> • On / Off • Fan speed • Operation mode • Vane control • Reservation (Sleep, Weekly On / Off) • Error check 	<p>Function</p> <ul style="list-style-type: none"> • Operation • Indoor temperature • Error alarm • Set operation mode • Set temperature • Set fan speed 	<p>Input</p> <ul style="list-style-type: none"> • Operation On / Off • Thermo On / Off • Operation mode (Fan / Heat / Cool) • Fan speed (Low / Middle / High) <p>Output</p> <ul style="list-style-type: none"> • Operation On / Off status • Error alarm 	<p>• 4.3 inch color LCD</p> <p>• Touch button</p> <p>• EEV full close function</p>

ACCESSORIES

MECHANICAL ACCESSORIES / PIPING ACCESSORIES



CASSETTE PANEL

Stylish designed panels make more unique space by various applications



Model Name & Applied Products


- 4 Way Cassette
 - PT-MCHW0
 - PT-QCHW0
 - PT-UQC / PT-UMC1
- 2 Way Cassette
 - PT-USC
- 1 Way Cassette (Grill Type)
 - PT-UUC / PT-UUC1 / PT-UTC
- 1 way cassette (Panel Type)
 - PT-UUD / PT-UTD

Key Features

- Independent vane operation uses separate motors, making it Possible to control all 4 vanes independently.
- The detachable corner design makes it easy to adjust the hanger during installation and to check for leakages in the drain pipe and refrigerant pipes.

Compact and Stylish Design

- New 4 way cassette panel adapted unibody shape and matching with into the ceiling
- Panel size is fit into the ceiling tile

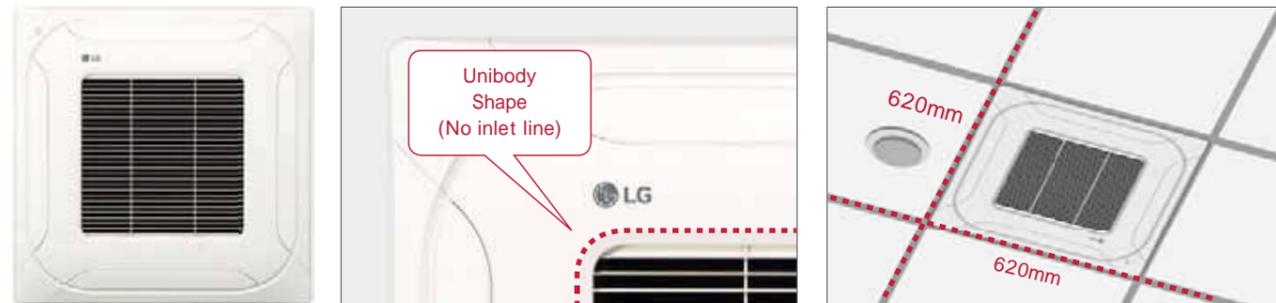


Specification

Model	Suction Type	Color (RAL)	Gloss	Weight (kg)	Dimension (mm)			Applied model capacity (kW)*					
					W	H	D	Single Split		Multi Split		Multi V	
								R32	R410A	R32	R410A	R410A	
4 way	PT-QCHW0	Grill	Morning Fog (RAL 9001)	-	3.0	620	35	620	2.5 ~ 5.0	2.5 ~ 5.0	1.5 ~ 5.3	1.5 ~ 5.3	1.6 ~ 6.2
	PT-MCHW0	Grill	Morning Fog (RAL 9001)	-	6.3	950	35	950	6.8 ~ 14.6	6.8 ~ 14.6	6.7	-	7.1 ~ 15.8
	PT-UQC	Grill	Morning Fog (RAL 9001)	-	3.0	700	22	700	2.5 ~ 5.0	2.5 ~ 5.0	-	1.5 ~ 5.3	1.6 ~ 6.2
	PT-UMC1	Grill	Morning Fog (RAL 9001)	-	5.6	950	25	950	6.8 ~ 14.6	6.8 ~ 14.6	-	6.7	7.1 ~ 15.8
2 way	PT-USC	Grill	Morning Fog (RAL 9001)	-	4.7	1,100	28	690	-	-	-	-	2.8 ~ 7.1
	PT-UUC	Grill	Noble White (RAL 9003)	-	4.6	1,100	34	500	-	-	-	-	2.2 ~ 3.6
1 way	PT-UUC1	Grill	Noble White (RAL 9003)	-	4.4	1,100	34	500	-	-	2.6 ~ 3.5	2.6 ~ 3.5	-
	PT-UTC	Grill	Noble White (RAL 9003)	-	5.5	1,420	34	500	-	-	-	-	5.6 ~ 7.1
	PT-UUD	Panel	Noble White (RAL 9003)	-	4.6	1,100	34	500	-	-	-	-	2.2 ~ 3.6
	PT-UTD	Panel	Noble White (RAL 9003)	-	5.5	1,420	34	500	-	-	-	-	5.6 ~ 7.1

* Based on cooling capacity
: Applied, - : Not applied

CASSETTE COVER

Cover in case of exposed cassette installation

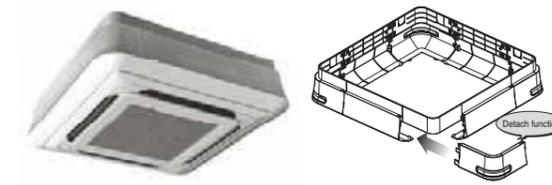

Model Name

PTDCM / PTDCQ

Applied Products

4 Way Cassette (for chassis TP, TN, TM, TQ, TR)

Key Features


- Specially designed for indoor unit
- Covers the side area of cassette
- Gives elegant looks
- Light weight

Included Parts

- Cover A, Cover B
- Cover C, Cover D
- Screws
- Installation Manual




Cover A (4 units)




Cover B (4 units)



Screw (32 units)



Cover C (4 units)



Cover D (4 units)



Installation Manual

Specification

Model	Front Panel	Weight (kg)		Dimensions (mm)			
		NET	Gross	W	H	D	
PTDCM	PT-UMC / PT-UMC1	TP / TN	5.9	8.8	1,157	1,157	268
		TM	5.9	8.8	1,157	1,157	310
PTDCQ	PT-UQC	TR	5.0	7.2	907	907	268
		TQ	5.0	7.2	907	907	310

CO₂ SENSOR

CO₂ sensor in ventilation system



Model Name

AHCS100H0

Applied products


LZ-H025GBA4
LZ-H035GBA5 / LZ-H050GBA5 / LZ-H080GBA5
LZ-H100GBA5 / LZ-H150GBA5 / LZ-H200GBA5

Applicable products

LZ-H050GXN0 / LZ-H080GXN0 / LZ-H100GXN0
LZ-H050GXH0 / LZ-H080GXH0 / LZ-H100GXH0

Dimensions

(unit : mm)

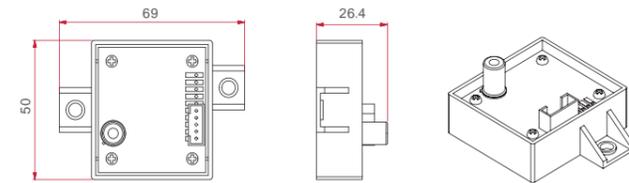

Key Features



Specification

- Applied Model : ERV (Embedded), ERV DX (Option)
- Supply voltage : DV12V ± 5%
- Output : 0.6 ~ 4.4V (Linear output, 240 ~ 1,760 ppm CO₂)
- Accuracy : ± 10% (2 days after installation)

Description

- The product is especially designed to detect CO
- This model requires Standard III Wired Remote Controller for display

Key Application

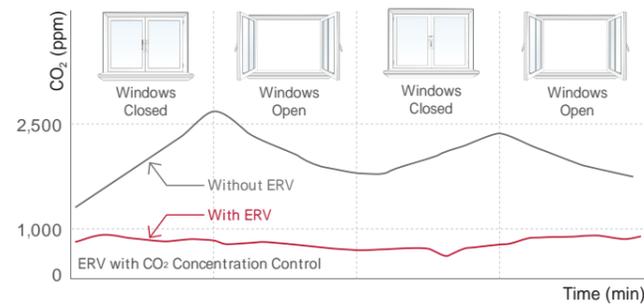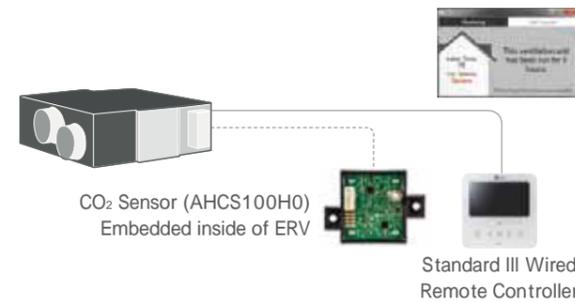


How to Install

1. Remove a screw on the service cover. Pull the service cover fixing bracket (), then remove the service cover (). Remove two elements () and two air filters ().
2. Install the sensor with two screws.
3. Remove a screw, then remove the right side of element rail ().
4. Press the holder () into the hole to fix the CO₂ sensor cable ().
5. Connect the wire terminal to the CN-CO₂ port of PCB.

Airflow can be controlled by concentration of CO₂, after setting automatic operation mode at remote controller.

Use the screwdriver whose total length is less than 250mm.

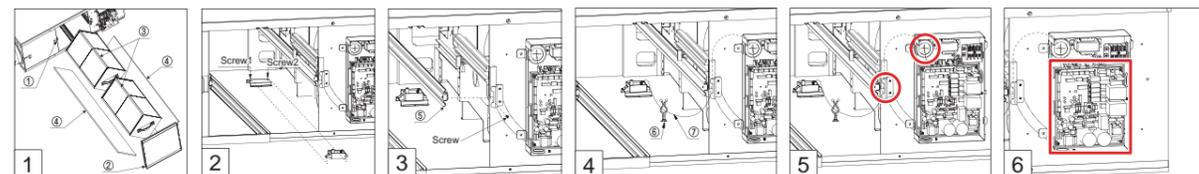

REFRIGERANT LEAKAGE DETECTOR

R410A refrigerant leakage detector makes our space safer



Model Name

PRLDNVS0

Applied Products

Multi V 5
Multi V IV Heat Pump & Heat Recovery
Multi V Water IV

Key Features


- This detector senses refrigerant leakage when the refrigerant concentration exceeds 6,000ppm. (The green and red LED lights blink simultaneously.)
- Alarm is "ON" over 6,000ppm has been maintained 5 seconds, and Alarm is "OFF" under 6,000ppm has been maintained 5 seconds.
- When the alarm of the refrigerant leak detector is switched on the user must ventilate the room until the alarm is disabled.
- The detector has to be installed inside the room and it should be installed 300 ~ 500mm above the floor.

Specification

Parts	Specifications	
Sensor	Rated Voltage (V)	DC 5.0 ±5%
	Dimensions (W x H x D, mm)	31 x 44 x 20
	Weight (g)	22
	Detectable Refrigerant	R410A
	Detected concentration (ppm)	0 / 6,000 Alarm Off / On
	Operating temperature range (°C)	-10 ~ 50
	Preserved temperature range (°C)	-40 ~ 60
Connecting Cable	Cable length (m)	
		10
Sensor Protective Cover	Dimensions of Front Plate (W x H x D, mm)	80 x 110 x 44.6
	Dimension of Backplate (W x H x D, mm)	80 x 110 x 6.5


This function available for ARU****L*5 and 4 (Multi V 5, Multi V IV H/P, H/R model)

Included Parts

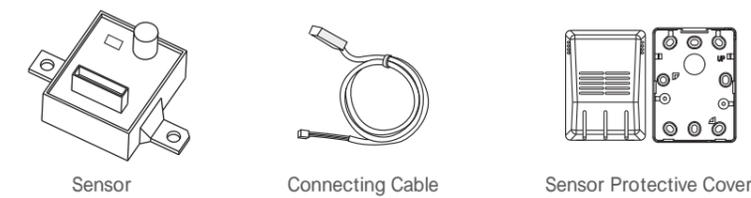

Key Application

Refrigerant Leakage Detector has three application methods.

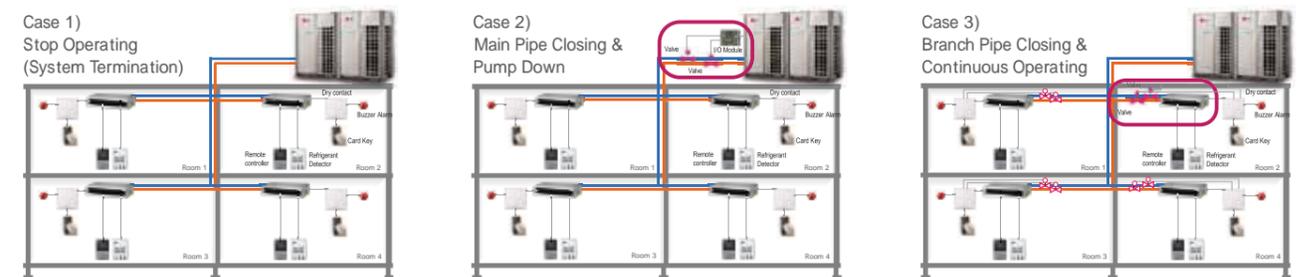

Accessory Specification (To realize the case 2 application)



EEV KIT

MULTI V EEV KIT is specially designed to reduce noise and make comfort environment



Model Name

PRGK024A0

Applied Products


Indoor Unt	Model	Chassis	Applicable	Indoor Unt	Model	Chassis	Applicable	
Cassette	1 Way Cassette	TU		Etc	Floor Standing	CE		
	2 Way Cassette	TT	N/A		Convertible	CF	-	
	4 Way Cassette	TS	(-5.6kW)			Ceiling Suspended	VE	
		TR					V1	-
		TQ	(-4.5kW)				V2	-
		TP	N/A			Wall Mounted	SJ	
	Duct	High Sensible	TN		N/A		SK	
			TM		-		SV	-
			BG		-		Art Cool	SF
		High Static	BR		-		Console	QA
B8			-		Hydro kit	K2	-	
M1			(-5.6kW)			K3	-	
Middle Static		M2	-					
		M3	-					
		L1	-					
Low Static		L2	-					
		L3	-					

: Applied, -: Not applied, N/A : Not Applicable

Key Features

- Decreasing noise level of Multi V Indoor units and easy installation

Key Application

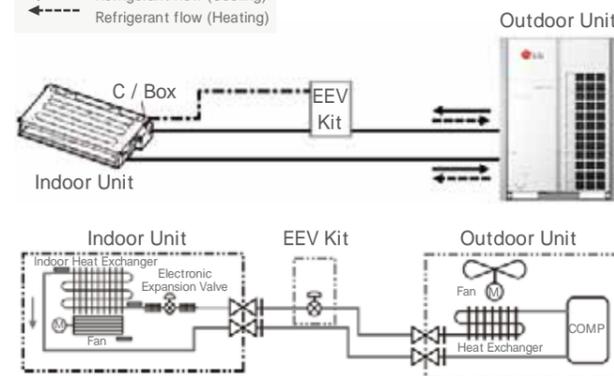


EEV Kit can be applied for the space which requires quiet and noise-sensitive



Note : If you don't use EEV of same specification, Cooling (Heating) capacity could be decreased.

How to Install

- Open Indoor unit's control box cover.
- Open fully indoor unit's EEV through vacuum mode of ODU setting. Detach the Indoor unit's EEV connector from PCB and then push the reset button of Outdoor unit's PCB
- After connecting indoor unit's EEV CONNECTOR, repeat the process & . Then, connect the EEV CONNECTOR of EEV KIT in PCB of indoor unit.
- Finally connect the lead wire of the EEV Kit to the indoor unit's PCB. Assemble the control box cover.

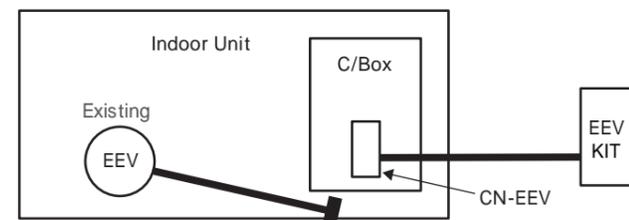

IR RECEIVER

IR RECEIVER can be connected to ceiling concealed duct and floor standing unit which the customer wants to control by wireless remote controller



Model Name

PWLRVN000

Applied Products




Multi V Indoors (Ceiling Concealed Duct, Floor Standing Units)

Key Features

- Designed for wireless control
- Indication lamps (3 colors) and Self-diagnosis function

Key Application

Note : Do not install both the IR Receiver and Wired Remote Controller. This may cause malfunctions.

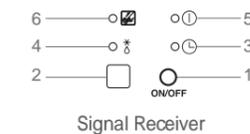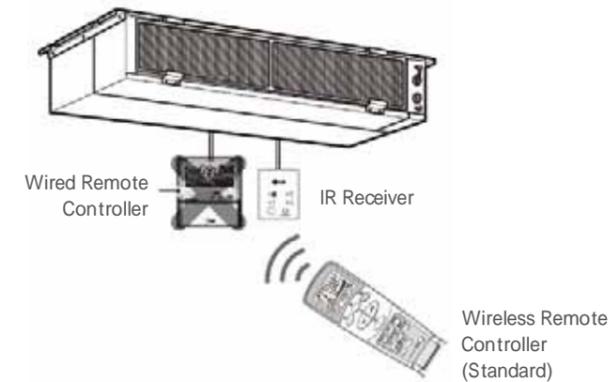

Operation of Indication Lamps

Emergency Operation button :
Turns the indoor unit on or off when remote controller is not working.

Signal Detector :
Receives the signal from remote controller.

Timer lamp (Green) :
Lights up during the timer operation.

Hotstart lamp (Orange) :
Lights up during the pre-heating operation, defrost operation as well as latent heat removal operation in heat mode. Available only for the heat pump models, not cooling only models.

System On/Off lamp (Red) :
Lights up during system controller operation.

Filter Sign lamp (Green) :
Lights up after 2,400 hours from the time of first power on operation.



Test Run Mode

After installing the product, you must run a Test Run mode. Press the Emergency Operation button for 5 seconds, until the LED flickers. Then the indoor unit, duct runs cooling mode for 18 minutes, where the setting temperature is 18 and the fan speed is high.

INDEPENDENT POWER MODULE

EEV fully close function in case of power cut



Model Name

PRIP0

Applied Products

Multi V Indoor Units

Key Features

- Independent Power Module is specially designed to close the Indoor EEV when power cut-off.
- Supply Voltage : DC 12V ± 50%

Included Parts


Model	PRIP0		
Item	Independent Power Kit	Screw	Clamp (Tie Wrap)
Q'ty	1	2	4
Figure			

(Others)


- Harness 1 (1m)
- Harness 2 (1m)
- Harness 3 (1m)
- Installation Manual
- Insulation (PE)

Key Application

If the EEV is opened due to power cut off, liquid refrigerant flow into compressor which could damage the compressor in cooling mode. Also condensing might happen for unclosed EEV's Indoor unit due to flow of refrigerant.

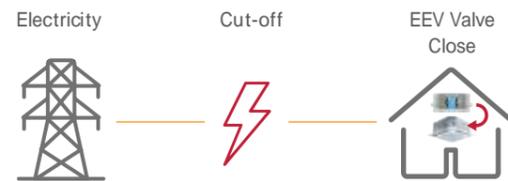

How to Install

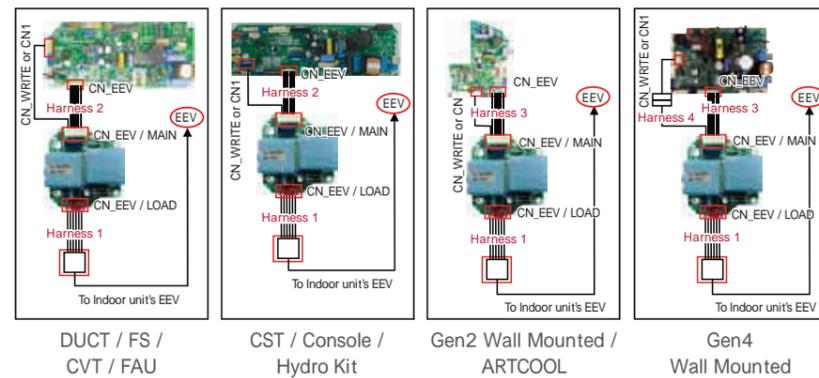

Turn the power off using circuit breaker. Disconnect the EEV cable of the indoor unit's PCB (CN-EEV). Connect the independent power module (CN-EEV/LOAD) to the indoor unit's EEV, using harness 1. Connect the independent power module (CN-EEV/MAIN) to the indoor unit's PCB (CN-EEV/CN-WRITE), using harness 2 or 3. Supply the power.

- * FS : Floor Standing
- * CVT : Convertible
- * FAU : Fresh Air Intake Unit
- * CST : Cassette

AUXILIARY HEATER RELAY KIT

Providing an efficient way to add auxiliary heat



Model Name

PRARS1

Applied Products

Wall Mounted, Art Cool Mirror, Art Cool Gallery

Model Name

PRARH1

Applied Products

1,2,4 Way Ceiling Cassette, High Static Ducted, Low Static Ducted, Ceiling Suspended

Key Features


- Provides two stages of auxiliary heat for indoor unit
- Provides ability to use the two stage auxiliary heater as the primary or secondary heating source

Included Parts


Model	PRARH1			
Item	Auxiliary Heater Relay Kit	Screw	Insulation	Installation Manual
Q'ty	1	2	2	1
Figure				

Model	PRARS1			
Item	Auxiliary Heater Relay Kit	Screw	Insulation	Installation Manual
Q'ty	1	2	2	1
Figure				


Key Application

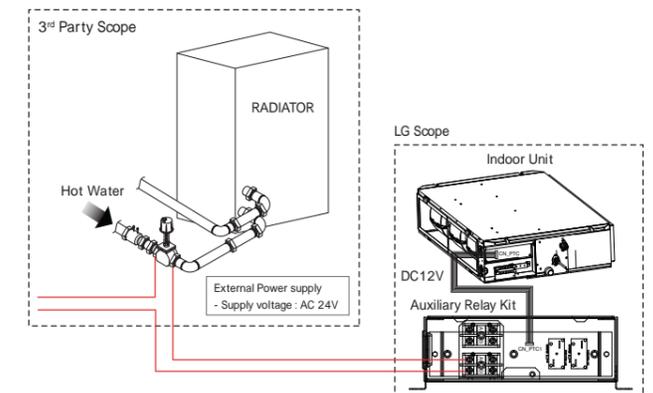

How to Install

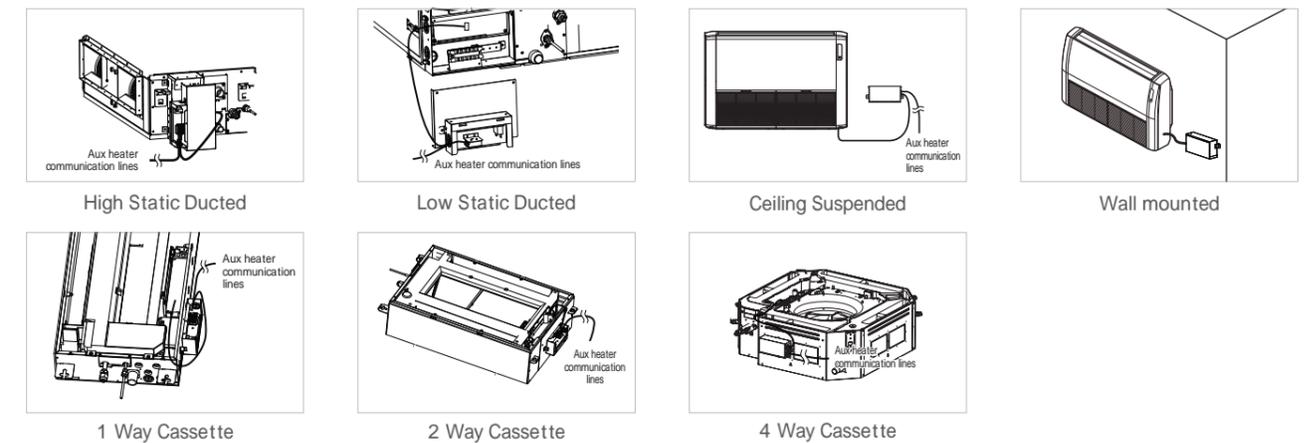

HEAT RECOVERY UNIT

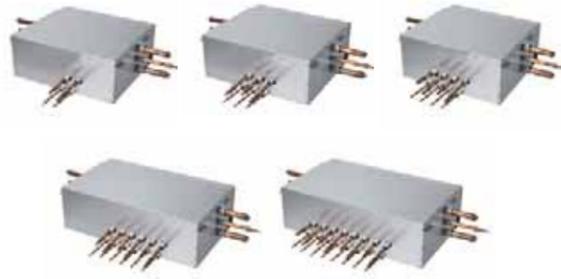

Model Name

PRHR023 (2 Branch Unit)
 PRHR033 (3 Branch Unit)
 PRHR043 (4 Branch Unit)
 PRHR063 (6 Branch Unit)
 PRHR083 (8 Branch Unit)

Applied Products


Multi V 5
 Multi V IV
 Multi V Water IV

Key Features

- Max. 64 indoor units can be connected (Max. 8 indoor units per branch)
- It is easy to install due to the automatic search algorithm for piping detection
- Subcooling cycle in HR unit makes the system efficiency maximum

Connection Capacity

Maximum number of connectable indoor units :
 64 IDUs/HR unit (in case of 8 ports model)

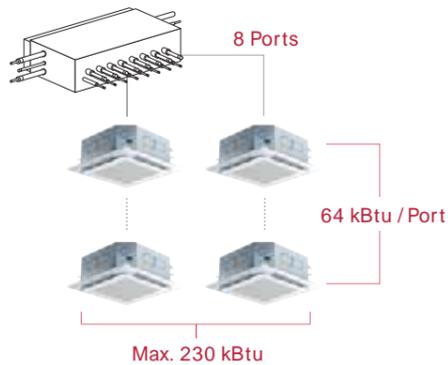


Flexible Connection

Series connection can be installed without pipes crossing.

New



Considering the direction for Indoor units and SVC port, connection for reverse direction makes much easier

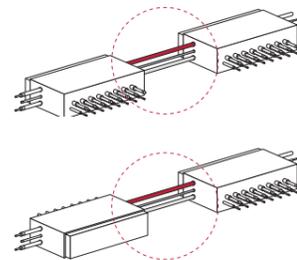

Included Parts

- HR unit (1EA)
- Hanging bolts M10 or M8 (4EA)
- Nut M8 or M10 (8EA)
- Washers M10 (8EA)
- Reducers

Specification


Model		PRHR023	PRHR033	PRHR043	PRHR063	PRHR083	
Number of Branch	EA	2	3	4	6	8	
Maximum Connectable Capacity of Indoor Units (Per branch / unit)	kW	17.5/35	17.5/52.5	17.5/69.5	17.5/69.5	17.5/69.5	
Maximum Number of Connectable Indoor units per Branch	EA	8	8	8	8	8	
Nominal Input	Cooling	kW	0.040	0.040	0.040	0.076	
	Heating	kW	0.038	0.038	0.038	0.072	
Net. Weight	kg	18.5	20.3	22.0	28.3	31.8	
Dimensions (W x H x D)	mm	786 x 218 x 657	786 x 218 x 657	786 x 218 x 657	1,113 x 218 x 657	1,113 x 218 x 657	
Piping connections	Indoor Unit	Liquid	mm (inch)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)
		Gas	mm (inch)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)
	Outdoor Unit	Liquid	mm (inch)	9.52 (3/8)	12.7 (1/2)	15.88 (5/8)	15.88 (5/8)
		Low pressure	mm (inch)	22.2 (7/8)	28.58 (11/8)	28.58 (11/8)	28.58 (11/8)
High Pressure	mm (inch)	19.05 (3/4)	22.2 (7/8)	22.2 (7/8)	22.2 (7/8)		
Power supply	Ø / V / Hz	1 / 220-240 / 50 1 / 220 / 60	1 / 220-240 / 50 1 / 220 / 60	1 / 220-240 / 50 1 / 220 / 60	1 / 220-240 / 50 1 / 220 / 60	1 / 220-240 / 50 1 / 220 / 60	

Reducers for Indoor Unit and HR Unit

Model	Liquid	High Pressure	Low Pressure
Indoor unit reducer			
PRHR023			
	HR unit reducer		

Reduce Noise

Heating Cooling switching operation

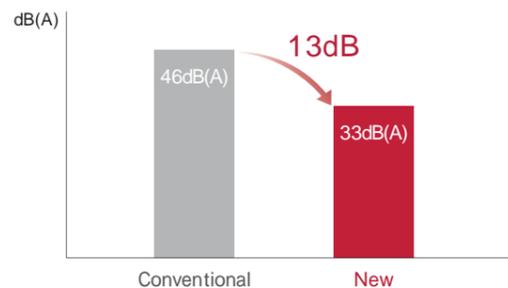

Test Condition (ISO Standard)

- Temp. : (Cooling) 27 DB / 19 WB, 35 DB / 24 WB
 (Heating) 20 DB / 15 WB, 7 DB / 6 WB
- Operating : Cooling Heating switching operation

Y BRANCH AND HEADERBRANCH

For refrigerant distribution of indoor units



Model Name

Refer to specifications

Applied Products


- Multi V 5
- Multi V IV
- Multi V III, Multi V Plus II, Multi V Plus
- Multi V S
- Multi V Water IV
- Multi V Water II

Key Features


- Various Y Branch pipe of different capacities make Multi V installation much easier
- Y Branch and header branch for both gas and liquid are provided.
- Insulation material is also provided for covering the branches

Key Application

Heat Pump System

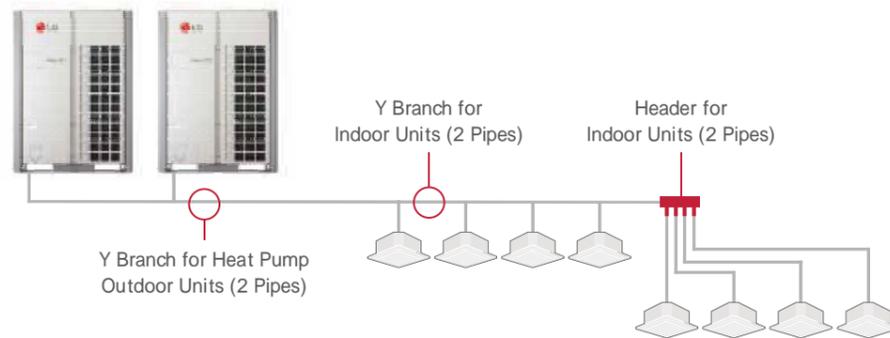

Heat Recovery System

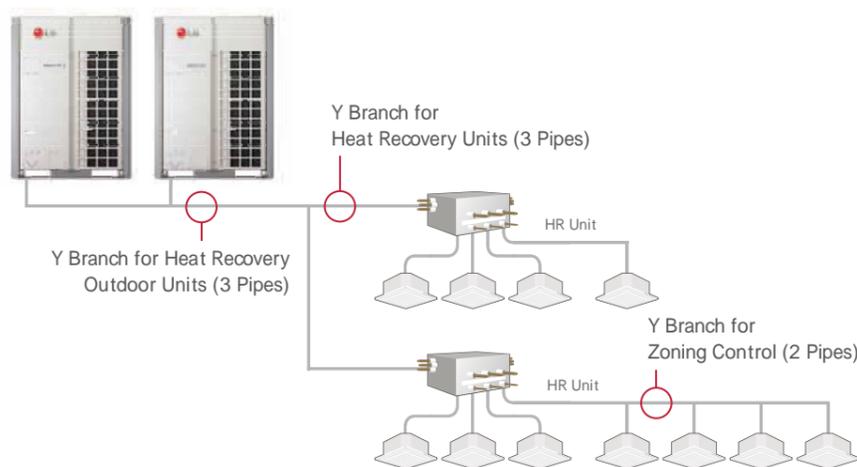

Specification

Header Branch

R410A

(Unit : mm)

Model	Gas Pipe	Liquid Pipe
ARBL054 (4 Branch)		
ARBL057 (7 Branch)		
ARBL104 (4 Branch)		
ARBL107 (7 Branch)		
ARBL1010 (10 Branch)		
ARBL2010 (10 Branch)		

PIPING ACCESSORIES




Y Branch pipe for connection of outdoor units

Specification

Heat Pump

R410A Multi V 5, Multi V IV, Multi V III, Multi V Water IV, Multi V Water II

(Unit : mm)

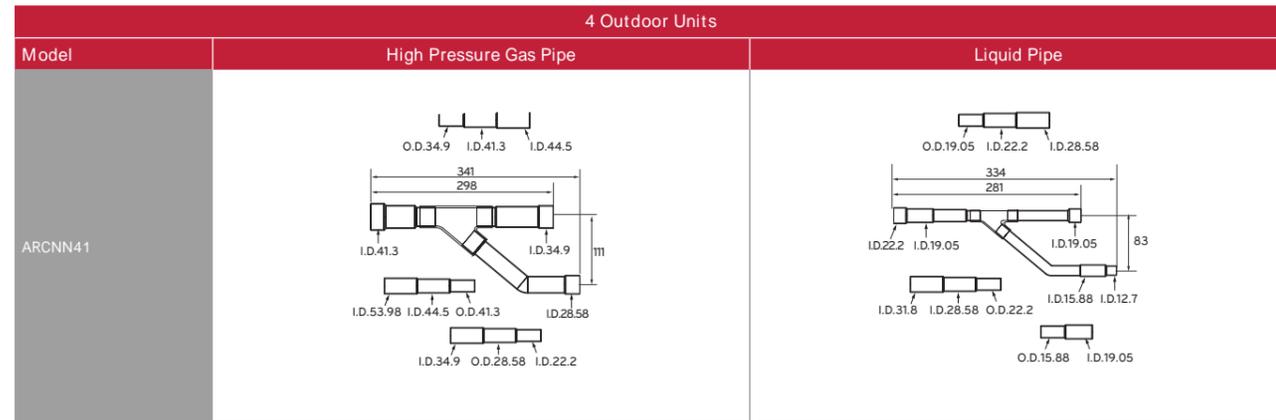
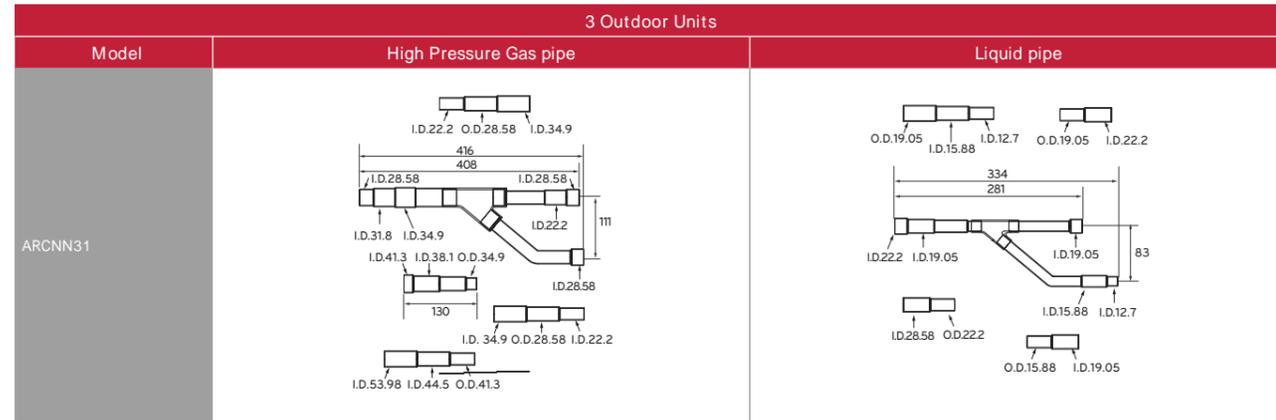
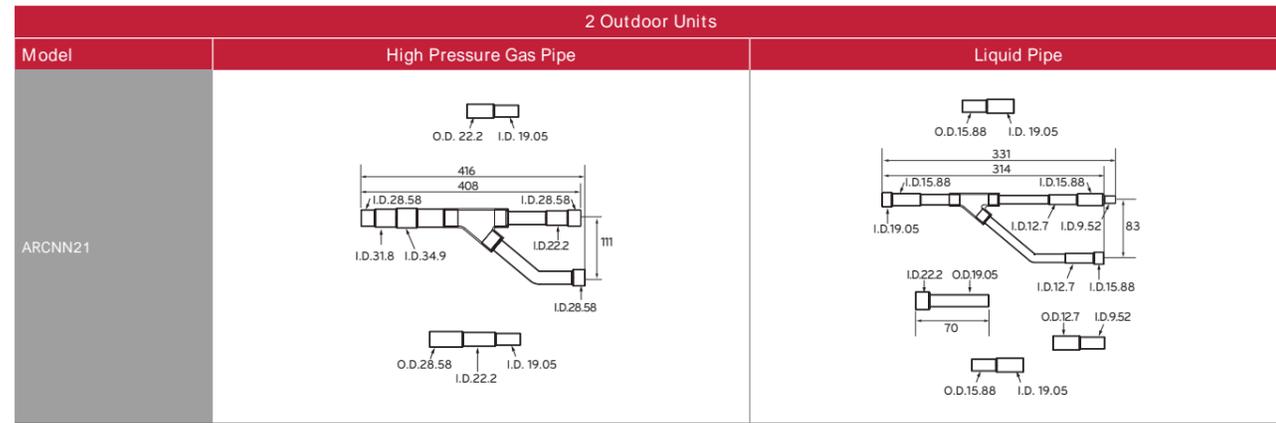


Specification

Heat Recovery

R410A Multi V 5, Multi V IV Heat Recovery, Multi V III Heat Recovery, Multi V Water IV Heat Recovery, Multi V Water II Heat Recovery

(Unit : mm)

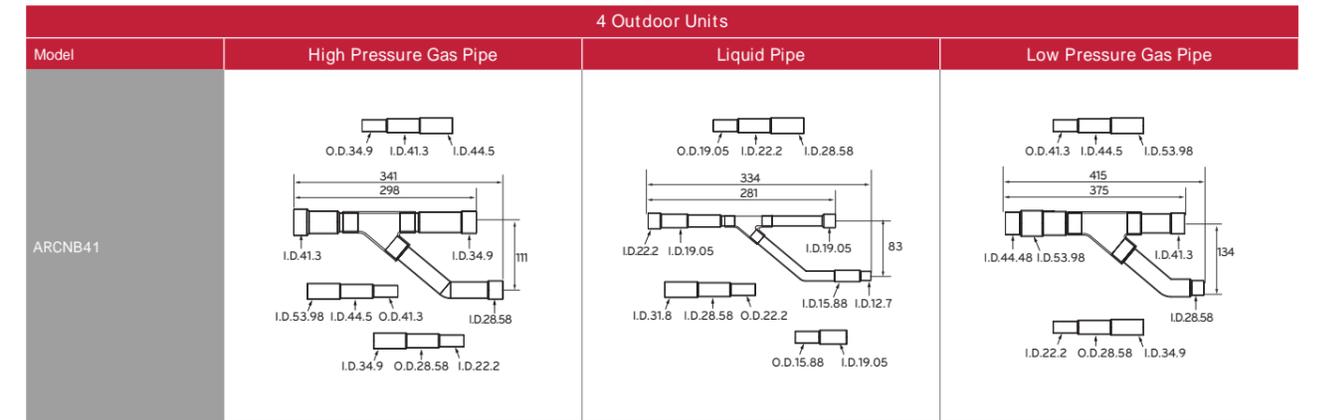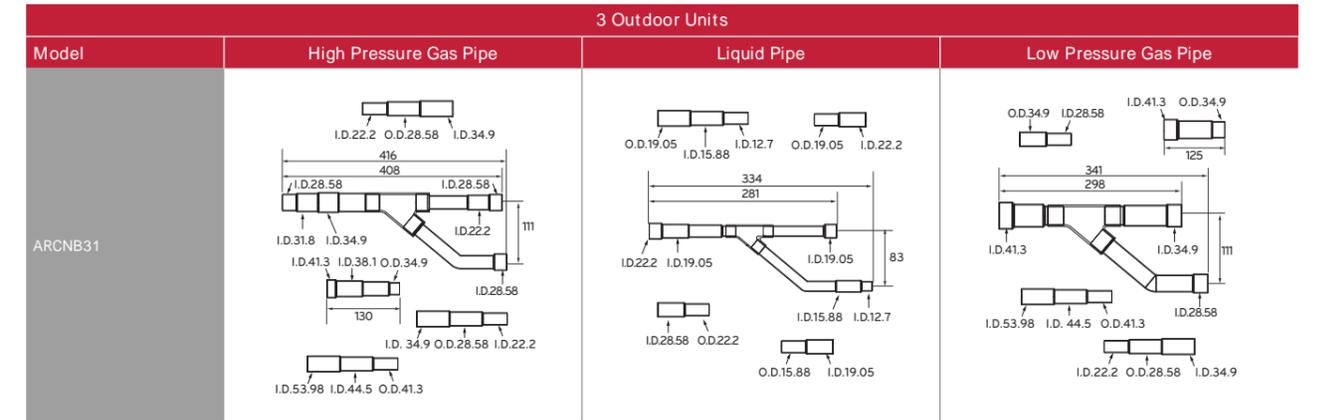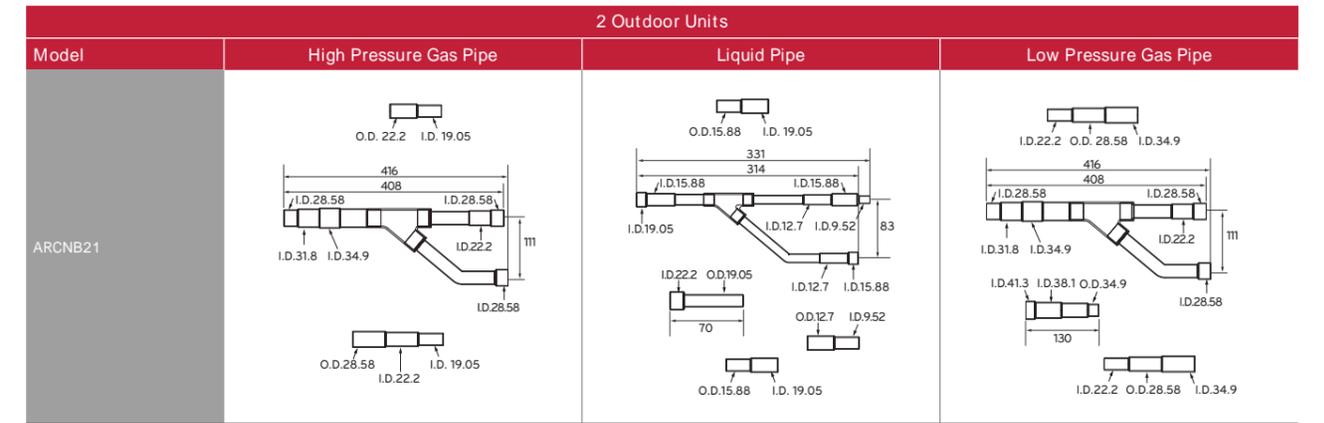

PIPING ACCESSORIES

Y Branch pipe for connection of outdoor units

Specification

Heat Pump, Heat Recovery Zone Control

R410A Multi V 5, Multi V IV, Multi V III, Multi V Plus II, Multi V Plus, Multi V S, Multi V Mini, Multi V Space II, Multi V Water IV, Multi V Water S, Multi V Water II

(Unit : mm)

Model	Gas Pipe	Liquid Pipe
ARBLN01621		
ARBLN03321		

Model	Gas Pipe	Liquid Pipe
ARBLN07121		
ARBLN14521		

Model	Gas Pipe	Liquid Pipe
ARBLN23220		

Specification

Heat Recovery

R410A Multi V 5, Multi V IV Heat Recovery, Multi V III Heat Recovery, Multi V Water IV Heat Recovery, Multi V Water II Heat Recovery

(Unit : mm)

Model	High Pressure Gas Pipe	Liquid Pipe	Low Pressure Gas Pipe
ARBLB01621			
ARBLB03321			
ARBLB07121			
ARBLB14521			

Model	High Pressure Gas Pipe	Liquid Pipe	Low Pressure Gas Pipe
ARBLB23220			

REFRIGERANT CHARGING KIT

Recharging refrigerant after a pump down or when refrigerant is either insufficient or excessive



Model Name

PRAC1


Applied Products

- Multi V 5
- Multi V IV Heat Pump
- Multi V IV Heat Recovery
- Multi V III Heat Pump
- Multi V III Heat Recovery
- Multi V Plus II
- Multi V Sync II

How to use

- Arrange manifold, capillary assembly, refrigerant vessel and scale
- Connect manifold to the gas pipe service valve of outdoor unit as shown in the figure
- Connect manifold and capillary tube. Use designated capillary assembly only.
If designated capillary assembly isn't used, the system may get damaged
- Connect capillary and refrigerant vessel
- Purge hose and manifold
- After "568" is displayed, open the valve and charge the refrigerant

Key Application

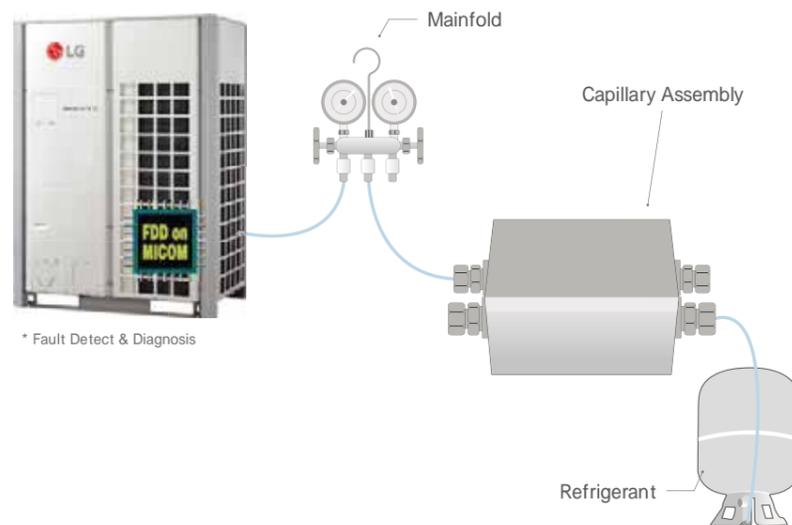

* Fault Detect & Diagnosis

DRAIN HOSE

Easy drain installation



Model Name

- PHDHA05T
- PHDHA07T
- PHDHA05B
- PHDHA07B

Applied Products


Multi V Indoor units

Key Features

- It reduces the installation time by over 40% with elbow-less drain hose
- Drain pump covers maximum 700mm high, featuring easy piping installation

Key Application

- Ceiling Mounted Cassette and Ceiling Concealed Duct (refer to PDB for applicable model)

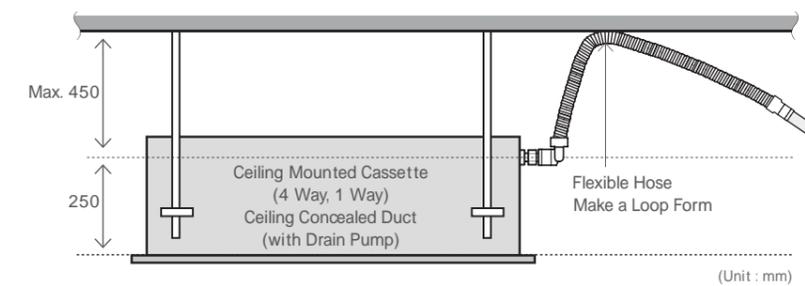

Specification

Model	Length	Quantity
PHDHA05T	500mm	30EA
PHDHA07T	700mm	30EA
PHDHA05B	500mm	5EA
PHDHA07B	700mm	5EA

STOPPER VALVES



Model Name

- PRVT120 (Under 12.7mm)
- PMVT780 (Under 22.2mm)
- PMVT980 (Under 28.58mm)


Key Features

- This unit can be applied for the additional indoor unit's installation
- This unit can be applied for each indoor unit's service

Specification

Model	Specification
PRVT120	
PRVT780	
PRVT980	

How to Install

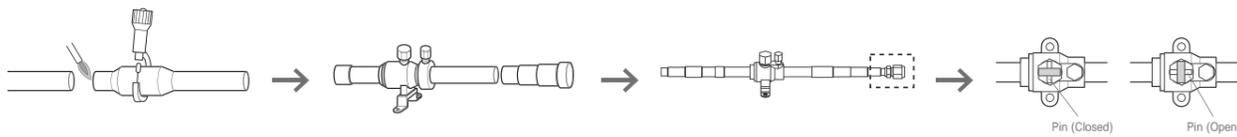


1. Cut the inlet side of the connector, and weld the pipe
2. If installing additional indoor units, the outlet side connector should be cut according to installation pipe.
3. When installing a stopper valve, the flare part should be facing towards additional indoor unit.
4. When installing an additional indoor unit, the SVC valve should be in closed state.


* When welding, service valve should be wrapped by wet cloth.

Application

(Room 3 & 4 : in use / Room 1 & 2 : need to install indoor units)

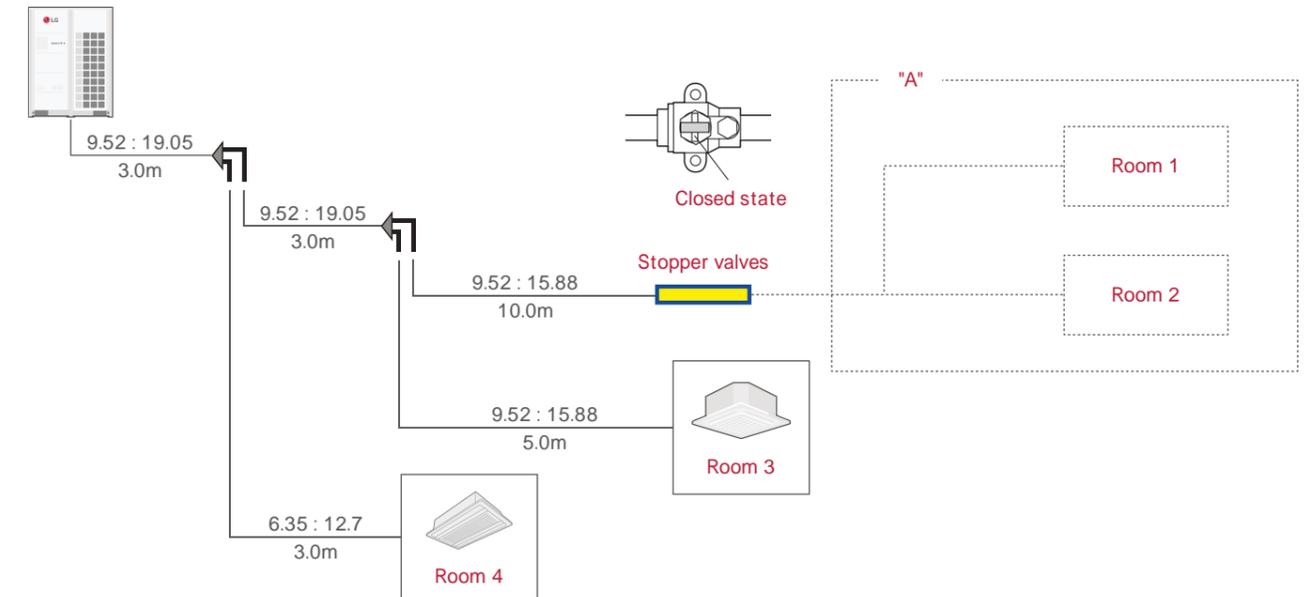

- In case of installation of additional indoor unit, refrigerant of used indoor unit must be discharged. (Room 3 & Room 4)
- If stopper valve is already installed, you can install additional indoor unit without refrigerant loss from the entire system.
- After installation of additional indoor unit, you just need refrigerant charging for "A" section.
- Then, open the Stopper Valve.

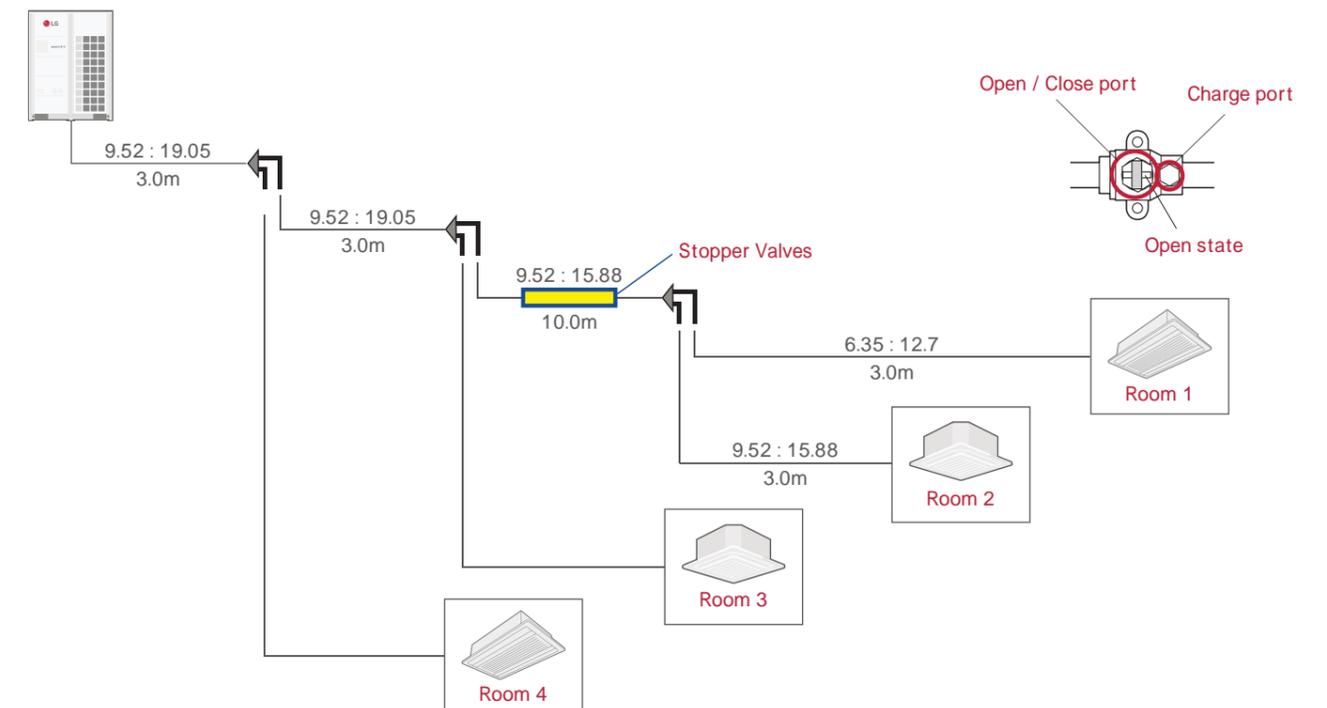



LG Electronics

<http://www.lg.com>
<http://partner.lge.com>

Distributed by



**FORTUNE
INTERNATIONAL
TRDG. CO. L.L.C**

Head Office - Sharjah, P.O. Box: 25818, U.A.E
T.: +971 6 555 36 77 F.: +971 6 559 46 77
Branch Office - Dubai, P.O. Box: 92807, U.A.E
T.: +971 4 258 74 77 F.: +971 4 258 74 78

website: www.fortune.ae E-mail: fortintl@emirates.net.ae