


Diamond Rib Panel

Our Diamond Rib profile is a strong, yet economical panel that can be used for agricultural, industrial and light commercial roofing and siding applications. With ribs spaced at 6" on centre and 3/4" high, this profile offers an exciting aesthetic appearance while maintaining the strength and durability you need.

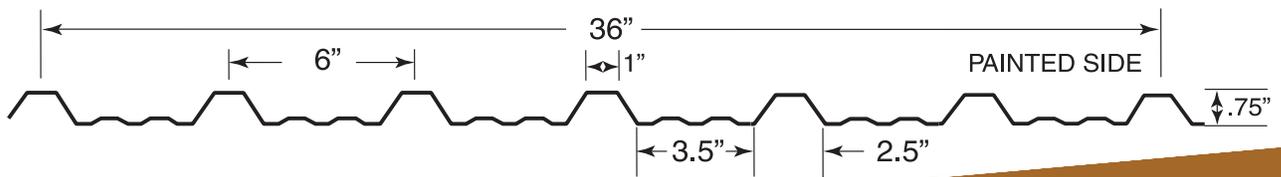

Diamond Rib Application/Specifications

Use: Roof/Wall

Slope: Recommended for 3/12 and greater

Coverage: 36" wide

Length: 3' to 45'

Rib Height: 3/4" ribs on 6" centres

Fastener System: Exposed Fastener

Recommended Substrate: Open Framing or Solid Substrate

Recommended Accessories

Trim/Flashing	Closures
See Trim Section	Diamond Rib Large Tab
	Diamond Rib Small Tab
Fasteners	Miscellaneous
MG#14x1.25" (wood)	Butyl Tape
MG#14x2" (wood)	Roof Boots
MG#10x1.5" (wood)	X Seal
MD#14x__" (metal)	Metal Roof Sealant
ST#14x7/8" (laps)	Synthetic Underlayment

Recommended Fastener Patterns



Recommended fastener pattern at eaves, ridges & endlaps
Side Lap fasteners recommended when installing as roof panel

Pre drilling sheets in bundles is not recommended during installation for any steel sheets as this can cause hot burs which can rust to the pre painted or bare sheet and create a rusting appearance around drill holes

Head Office
VersaFrame Inc.
2806 - 5th Street
Nisku, AB
T9E0H1

TF: 877-463-8256
PH: 780-979-0325
FAX: 780-955-8636
www.versaframe.ca