


Sustainable Coils

Replacement Coil Solutions!

Nordyne Uncased replacement coil options:

Revision date: 7/17/17

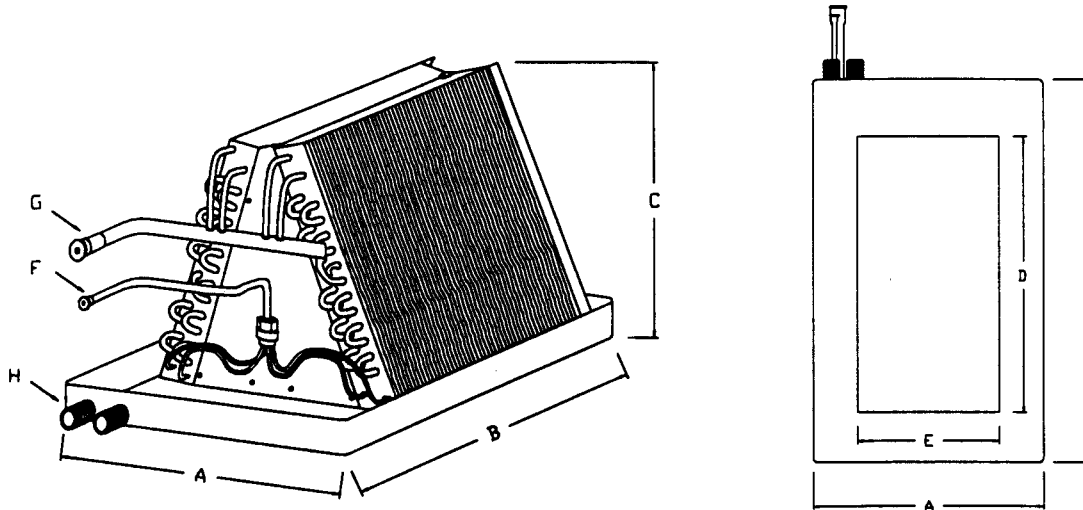

COIL MODEL	A	B	C	D	E	F	G	H
RC3BA-24U-A	12 3/4	19 1/2	12 1/2	15 1/2	5 1/2	3/8	3/4	3/4
RC3BA-36U-A	12 3/4	19 1/2	18 1/2	15 1/2	5 1/2	3/8	3/4	3/4
RC3BA-36U-B	18 1/8	19 1/2	18 1/2	15 1/2	10 7/8	3/8	3/4	3/4
RC5BA-37U-B	18 1/8	19 1/2	24 1/2	15 1/2	13 13/16	3/8	3/4	3/4
RC3BA-48U-B	18 1/8	19 1/2	18 1/2	15 1/2	10 7/8	3/8	7/8	3/4
RC3BA-48U-C	21 1/16	19 1/2	18 1/2	15 1/2	13 13/16	3/8	7/8	3/4
RC3BA-60U-C	21 1/16	19 1/2	24 1/2	15 1/2	13 13/16	3/8	7/8	3/4
*RC5BA-60U-C	21 1/16	19 1/2	28 1/2	15 1/2	13 13/16	3/8	7/8	3/4

*Denotes over size coil that must be shipped on a skid to a commercial location.

Suction line: ↑ 14 1/2", → 2 3/8" left side.

Liquid line: ↑ 12 1/8", → 1 3/8" left side.

Dual drains: Primary drain → 2" from left corner.

3/8 O.D. UNIGUARD® by Luvata copper alloy tubing to block formicary corrosion

Aluminum end plates to protect against rust corrosion

Enhanced aluminum fins spaced at 14 FPI

Piston metered for original R-22 applications, R-410A piston available upon request

R-22 and R-410A expansion valve kits available upon request

22 ga. G-90 paint grip metal pan coated for rust protection and painted

Pre-swaged refrigerant connections, shipped with dry nitrogen holding charge

Five year replacement warranty

Visit our website www.SustainableCoils.com for further information regarding our complete product line.