



MaxPour®, MaxPour® Supreme & PolyMax®

PLAYGROUND SURFACING WARRANTY

WARRANTY START DATE:

WARRANTY END DATE:

Project Name:

Project Location:

Owner:

Address:

City:

State:

Zip:

SYSTEM:

- MaxPour®
- MaxPour® Supreme
- PolyMax®

PLAYMAX SURFACING, INC. warrants that the MaxPour®, MaxPour® Supreme or PolyMax® playground safety surfacing system installed at the project location listed above shall be free from defects in materials and workmanship for a period of _____ years from the above installation date.

THE WARRANTY CONTAINED HEREIN IS EXPRESSLY IN LIEU OF (AND PURCHASER WAIVES) ALL OTHER WARRANTIES, EXPRESSED, STATUTORY OR IMPLIED IN FACT OR BY LAW, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. PURCHASER FURTHER AGREES THAT IN NO EVENT SHALL PLAYMAX SURFACING, INC. ON ANY CLAIM OF ANY KIND HAVE ANY LIABILITY TO BUYER FOR LOSS OF USE, LOSS OF PROFITS OR FOR ANY INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

PLAYMAX SURFACING, INC. and the Purchaser expressly agree that the remedies provided in this warranty are in lieu of all other remedies against PLAYMAX SURFACING, INC. which purchaser might otherwise have, to include but not limited to consequential damages, direct damages and indirect damages, and further that PLAYMAX SURFACING, INC. sole obligations hereunder are limited to the repair or replacement of defective material. If the same material is not available, PLAYMAX SURFACING, INC. reserves the right to supply material of a similar grade, color and quality. Unless reasonable written notice is provided to PLAYMAX SURFACING, INC. by purchaser of a warranty claim, all claims shall be waived. Reasonable notice is defined as written notice received thirty (30) days from the date the defect was either discovered or should have been discovered with reasonable diligence.

This warranty does not cover damage due to lifting or shifting of the sub-base or substrate beneath the sub-base, cracking, moisture issues, alkali, stains, cuts, burns, gouges, pokes (such as high heel shoes), shrinking of not more than 3/8", vehicular traffic damage, weed trimmers, bicycles or scooters, skates, damage caused by use other than intended, normal wear and tear, ultraviolet fading, or any type of vandalism or acts of God.

To retain this warranty for its specified duration, the owner of the above site agrees to notify PLAYMAX SURFACING, INC. within thirty (30) days of noticing defect. The owner also agrees to do routine maintenance as outlined in the PLAMAX SURFACING, INC. Maintenance Instructions sheet.

Chris Wolf
President & General Manager



To verify product certification
visit www.ipema.org



Maintenance & Operations Sheet

PlayMax Surfacing Systems utilize the finest materials available in the playground surfacing industry. Even with the best of materials, all playground surfacing systems will need some maintenance to keep them in tip top shape.




Cleaning

Rubber surfacing systems may be cleaned with a 1200-1500 psi pressure washer to remove gum, tree sap, biological materials and hard water deposits on the playground surface. Hold wand at a 45-degree angle relative to the surface so that the rubber is not damaged by the water jet. Please note that excessive power washing can loosen the bond of granules to each other, shortening the life of the surface, so go easy with the pressure washer.

Hole & Crack Repair

Holes or cracks in the playground surfacing may be repaired with PlayMax rubber and polyurethane materials. For systems still under warranty, repairs should be made by PlayMax, or by a PlayMax authorized installer under our direction. Emergency repairs may be made using like materials, however these should be inspected by PlayMax or a PlayMax authorized installer soon after installation, as they may need to be re-worked or replaced if not installed according to PlayMax specifications.

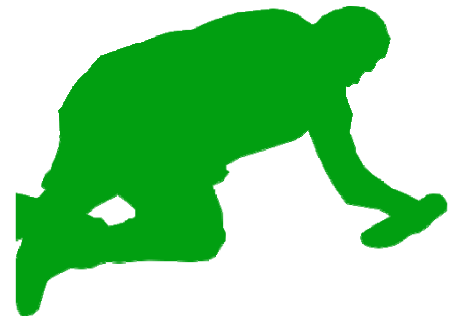

Re-coating with aliphatic polyurethane

As playground materials age, it can be beneficial to rejuvenate the surface by roller-applying a coating of crystal clear, aliphatic binder to the playground surface. A coating of binder will help to lock in loose granules, and can make a weathered or faded rubber surface look fresh again. Not all pads require this, but some will benefit from this procedure. Please contact PlayMax for a competitive price. For those owners who do their own maintenance, we can provide a price for materials for this purpose for PlayMax playground pads or for existing playground surfaces from other sources. Call for details.

PLAYMAX SURFACING, INC.

1950 Compton Ave., Suite 111, Corona, CA 92881

(951) 250-6039

(951) 356-6600

(951) 356-6550 (Fax)

www.playmaxsurfacing.com