


Sustainable Coils LLC

Replacement Coil Solutions!

MOBILE HOME COILS

Revision Date: 03/10/2021

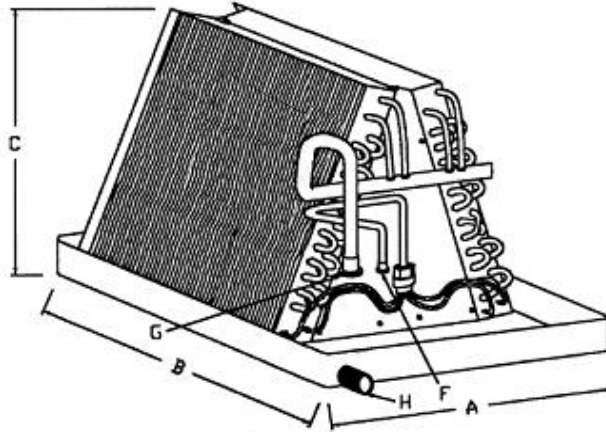

COIL MODEL	COIL WEIGHT	A	B	C	F	G	H
1024A-MH	22	18	19 1/2	16 1/2	3/8	3/4	3/4
1036A-MH	28	18	19 1/2	14 1/2	3/8	3/4	3/4
1036A-FED	34	15 3/4	20 5/8	14 1/2	3/8	3/4	3/4
1048A-MH	33	18	19 1/2	18 1/2	3/8	7/8	3/4
1048A-FED	38	15 3/4	20 5/8	18 1/2	3/8	7/8	3/4
1064A-MH	38	18	19 1/2	18 1/2	3/8	7/8	3/4
1448A-MH+4X4	33	18	19 1/2	18 1/2	3/8	7/8	3/4
1449A-MH+4X4	39	18	19 1/2	18 1/2	3/8	7/8	3/4

Hairpin Tube: UNIGUARD® by Virtus Precision Tube, 3/8" O.D. CU-422 copper alloy
2,490 PSI burst pressure minimum

Rows/FPI: 2 rows, 14 FPI: 1024A-MH
3 rows, 14 FPI: 1036A-MH, 1048A-MH, 1448A-MH4X4
1036A-FED, 1048A-FED
4 rows, 12 FPI: 1064A-MH, 1449A-MH+4X4

End Plates: Aluminum

Metering: Piston metered for R-410A refrigerant, additional R-22 piston
optional

Refrigerant connections: 1448A-MH+4X4, 1049A-MH+4X4 includes factory installed R410A TXV
Pre-swaged

IRV (cu. In.): 1024A=97.96 1036A=128.57, 1048A=165.30, 1064A=220.41
1448A-MH+4X4=165.30, 1449A-MH+4X4=220.41

Drain Pan: Nylon resin pans are UL 94, 5VFR rated and U.V. safe
FED drain pans are metal

Holding Charge: Dry nitrogen

Warranty: Five year replacement

Please visit our website www.SustainableCoils.com for further information regarding our complete product line.

Telephone: (903) 881-6006

Fax: (903) 881-6008

email: sales@sustainablecoils.com