

Project: \_\_\_\_\_

Type: \_\_\_\_\_

Quantity: \_\_\_\_\_



The WLB series solar powered LED bollard is ideal for low level architectural/commercial way-finding, delineation and landscape lighting applications. The self-contained, simple, louvered design combined with high quality construction and unequalled solar powered performance make the WLB series an excellent choice when vertical illumination is required.

Utilizing solar power and LED lighting the WLB bollards are fully self contained and offer significant benefits over typical wired bollards:

- Low install costs and minimal site impact with no trenching, cabling or wiring
- Minimal ongoing costs with no electrical bills or bulbs to change
- Immune from power outages
- A sustainable choice without recurring carbon emissions

All of our solar powered lights are enabled by our innovative Solar Lighting Controller (SLC). The SLC in each light is “self-learning” and allows the lights to predictively adapt to their surroundings, providing a level of lighting performance and reliability unavailable in other solar lighting products.

## TECHNICAL SPECIFICATIONS

- Solar Module:**
- High impact, UV resistant encapsulation
  - High efficiency mono-crystalline cells
  - Fully integrated into bollard housing
  - Used for day/night detection (no photocell required)



- Solar Lighting Controller(SLC):**
- High efficiency Maximum Power Point Tracking (MPPT) charge controller
  - Microcontroller based system
  - Includes high efficiency LED driver
  - Integrated into bollard housing
  - Automatically manages lighting performance based on environmental conditions and lighting requirements

- Battery:**
- High-performance lithium (LiFePO<sub>4</sub>)
  - Exceptional 8 – 10 year lifecycle
  - High temperature tolerance
  - Contained within bollard post
  - Designed for easy battery changes when required

- LEDs & Optics:**
- High output Cree LEDs
  - 100,000 hour L70 lifetime
  - Warm (3000K) and neutral (4000K) white color temperatures available
  - Omni-directional light output with low glare, frosted lens
  - Typical output of 86 to 130 lumens

- Mechanical Construction:**
- Cast, low copper aluminum housing
  - Extruded, low copper aluminum post
  - Stainless fasteners
  - Architectural grade, super durable, TGIC powder coat

- Factory Set Lighting Profiles:**
- On at dusk, off at dawn
  - On at dusk, turn off after 6 hours
  - On at dusk, dim to 30% after 6 hours
  - On at dusk, off after 5 hours, on 1 hour before dawn
  - On at dusk, dim to 30% after 5 hours, on for 1 hour before dawn

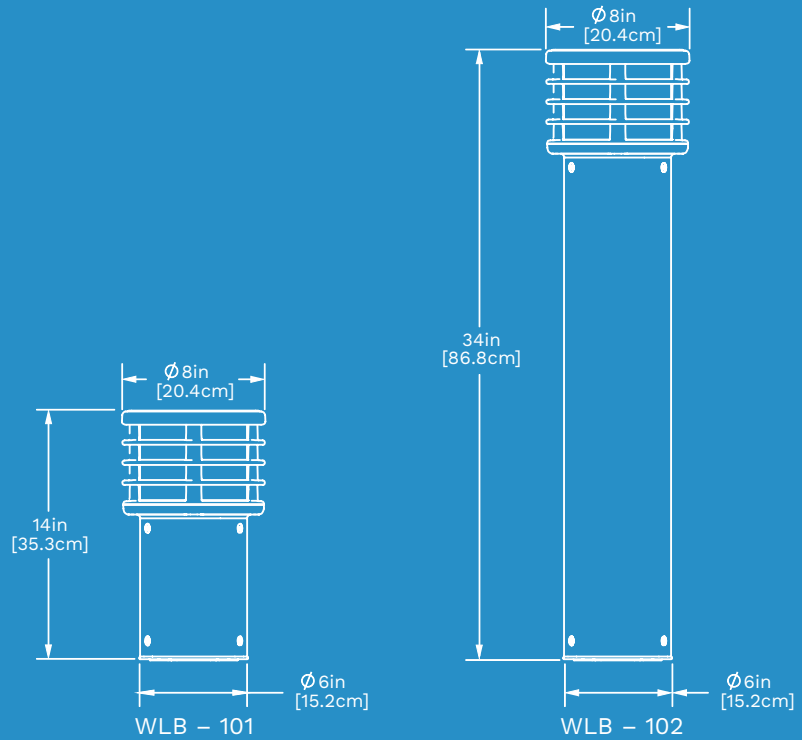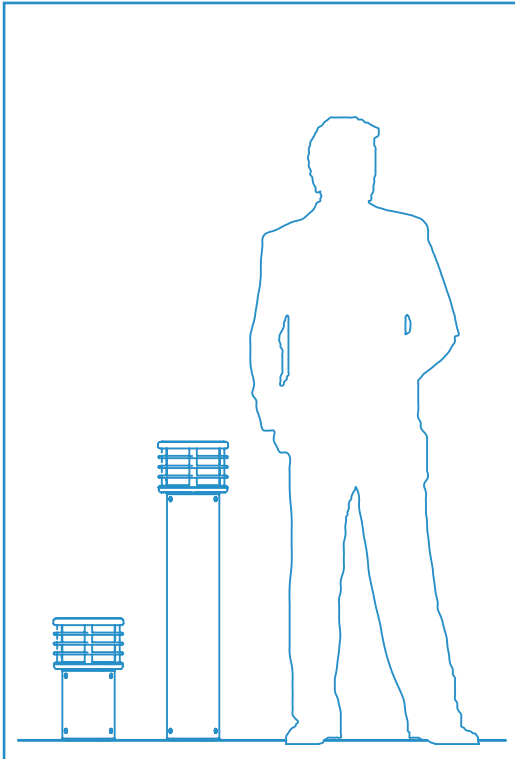

## ORDER MATRIX

Series	Height	Finish	Distribution	LED Color	Lighting Profile	Options
<b>WLB</b>	<b>101</b> - 13.6"	<b>BK</b> - Black	<b>SYM</b> - Symmetrical	<b>WW</b> - 3000K	<b>00</b> - Dusk till dawn	<b>SEC</b> - Security Fasteners
	<b>102</b> - 34"	<b>BZ</b> - Bronze		<b>NW</b> - 4000K	<b>01</b> - Dark +6 hours then off	<b>PA</b> - Pre-Ship Anchor Bolts
		<b>SV</b> - Silver			<b>02</b> - Dark +6 hours then 30%	
		<b>WH</b> - White			<b>03</b> - Dark +5 hours, off, Dawn -1 hour	
		<b>CC</b> - Custom			<b>04</b> - Dark +5 hours, 30%, Dawn -1 hour (DEFAULT)	

Represented by:

Notes:  
- Specifications subject to change without notice