

# A Review Paper on Metamaterial Antenna and its Application

Shalini, Roopali

Student, ECE, Rayat & Bahra Institute of Engineering & Bio-Technology, Mohali, India

**Abstract** - In this paper a brief review about metamaterials is given. Here we discuss different type of metamaterials composite structure used in antenna engineering. Compared with the conventional materials, metamaterials exhibits some specific features which are not found in conventional material. After that metamaterials based antenna, also describe the parameter of antenna like gain and bandwidth which can improve by using metamaterials and discuss future scope and application of metamaterials. Moreover, novel applications of metamaterials composite structure in antenna engineering have been considered. Some unique applications of these composite structures as an antenna substrate, superstrate, feed networks, phased array antennas, ground planes, antenna radome and struts invisibility have been discussed.

**Keywords** - Patch Antenna, Metamaterial, Left handed materials (LHM), Negative refractive index (NRI), dispersion.

## I. INTRODUCTION

In the recent years electromagnetic metamaterials (MTMs) are widely used for antenna applications. These specifically designed composite structures have some special properties which cannot be found in natural materials. Metamaterials are also known as Double negative (DNG) materials, Left handed materials (LHM) etc. In 1968, the concept of metamaterials was first published by the Russian physicist Victor Veselago [1]. Thirty years later, Sir John Pendry proposed conductor geometries to form a composite medium which exhibits effective values of negative permittivity and negative permeability. Based on the unique properties of Metamaterials, many novel antenna applications of these materials have been developed. The use of metamaterials could enhance the radiated power of an antenna. Negative permittivity and permeability of these engineered structures can be utilized for making electrically small antenna, highly directive, and reconfigurable antennas. These, metamaterial based antennas have also demonstrated the improved efficiency & bandwidth performance. Metamaterials have also been utilized to increase the beam scanning range of antenna arrays. They antennas also find applications to support surveillance sensors, communication links, navigation systems, and command and control systems [2]. In this paper we have limited our discussion to antenna applications of metamaterials.

## II. ANTENNA SUBSTRATE

Metamaterials are promising candidates as antenna substrates for miniaturization, sensing, bandwidth enhancement and for controlling the direction of radiation [3]. These substrates have great potential for improving antenna or other RF device performances. Metamaterial substrate can be used for a variety of applications. It can be designed to act as a high impedance substrate that can be used to integrated low-profile antennas in various components and packages. In general any antenna, printed on a high dielectric constant substrate has a low resonance frequency. This property contributes to miniaturization of the device. Metamaterial substrates can be designed to act as a very high dielectric constant substrate at given frequency and hence can be used to miniaturize the antenna size [4].

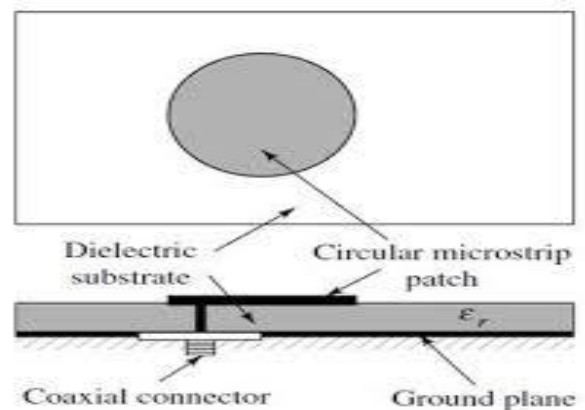


Fig.1: Antenna substrate

Metamaterial substrates have specific abilities to control and manipulate electromagnetic fields. There is an ongoing effort to achieve field distributions suitable for growing new fields of applications such as co-ordinate transformation devices, invisibility cloaks, Luneburg lenses, and antennas. These metamaterial substrates have interesting physical properties that are well suited to realize such structures. [5]

## III. ANTENNA SUPERSTRATE

Next generation telecommunication satellites are heavily demanding for multiple beam antennas. Simultaneously it is necessary to minimize the number of reflector antennas for mass as well as size reduction of antenna system. Accordingly it would be necessary to co-locate different feeds close to the focus. However this requires feeds of smaller in size and is located close to one another. Due to smaller size feeds, directivity issue arises and as a result

spillover efficiency of the whole feed reflector system suffers. High directive antenna elements can be realized by introducing a set of metamaterial superstrates that can improve the radiating efficiency. [6] [7] Metamaterials can act as resonant structures which allow the transmission and reflection of electromagnetic waves in a specific way in certain frequency bands.

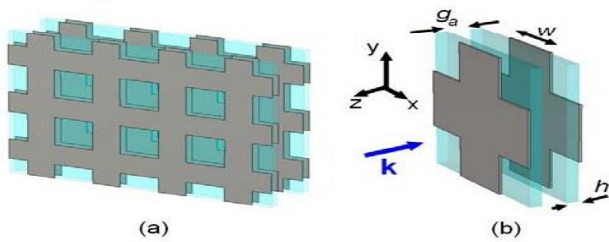



Fig.2. (a) Schematic view of MENZ metamaterial based on the fishnet structure (b) metamaterial unit cell

A dielectric superstrate properly placed above a planar antenna has remarkable effects on its gain and radiation characteristics. The key advantage of using metamaterial superstrate is to maintain the low-profile advantage of

planar antennas. The main features of metamaterial superstrate are to increase the transmission rate and control of the direction of the transmission which enable one to design high gain directive antennas. Metamaterial superstrates can be applied to conventional antenna to increase both the impedance and directivity bandwidth of the proximity coupled microstrip patch antenna and can also be used to change the polarization state of the antenna [8] [9] [10].

#### IV. ARRAY FEED NETWORK

Metamaterial phase-shifting lines can be used to develop antenna feed network which can provide broadband, compact and non-radiating, feed-networks for antenna arrays. These feed networks have less amplitude phase errors. Metamaterial based transmission line feed networks can be used to replace conventional transmission lines-based feed-networks, which can be bulky and narrowband. These feed-networks have the advantage of being compact in size, therefore eliminating the need for conventional TL meander lines [11].

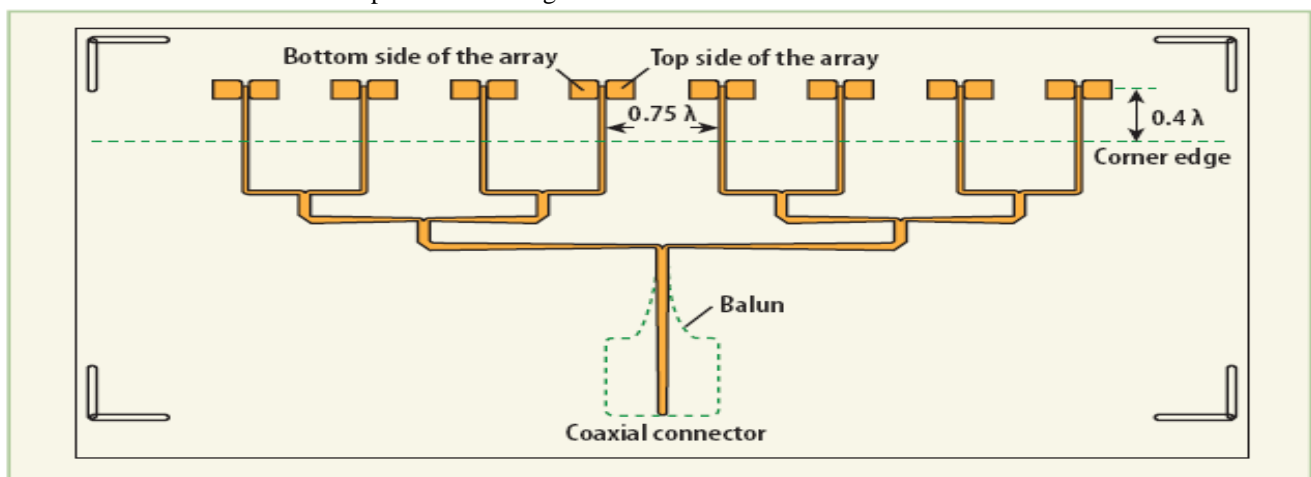

1. This layout represents the printed patch array antenna with feed network and balun.

Fig.3: Array feed network

In addition, these feed-networks are more broadband as compared to conventional transmission line based feed-networks, which enables antenna arrays (series-fed broadside radiating) to experience less beam squint and have the potential to significantly reduce the size of the feed networks (parallel-fed arrays). Appropriately designed metamaterial based phase-shifting lines are capable of providing arbitrary insertion phase, compact in size, and linear, flat phase response as compared to conventional transmission line delay lines [12] [13].

#### V. PHASED ARRAY ANTENNA

A phased array antenna consists of an array of antennas that enables long-distance signal propagation by directional radiation. It requires phase shifters to scan the beam in various directions [14]. Design of phased antenna array with integrated phase shifters and wider scan-angle

range continues to be a big challenge for antenna designers. Metamaterials can be used to improve the impedance matching of planar phased array antennas over a broad range of scan angles [15]. In recent years metamaterial phase shifters are adopted to fine tune the phase difference between adjacent elements. These metamaterial phase shifters can be easily integrated onto the CPW feeding line also [16] [17] [18].

#### VI. ANTENNA RADOME

Radome technology was spin off in Second World War. The maximum speed of fighter plane and aircraft are limited to the speed at which external antennas on these aircrafts are able to survive. A plastic cover over a B18 bombers radar antenna was the first known application of Radome which was used in Second World War. Radome is a covering to protect an antenna from rain, wind perturbations,

aerodynamic drag, and other disturbances. Radomes and other structures that enclose radiating systems are designed for their mechanical integrity, and they are typically made from ceramics or composites having inherently high dielectric constant values. Radomes are generally used for various antennas such as SATCOM antennas, Air traffic control, parabolic reflector antennas, ocean liners, small aircraft antennas, missile, vehicular antennas, cell phone antenna towers, and other microwave communication applications to conceal antennas.[19] Ideally, Radome should be made from a perfectly RF transparent and non-refractive material in order to not disrupt radiated fields from and to the enclosed antenna. However they are typically made from dielectric materials. In order to exhibit these characteristics, the Radome material would require being impedance and index-matched to free space for all angles of plane wave incidence. Due to differences in curvature between the inner and outer surfaces of Radome structure, refraction in dielectric materials introduces deflections to exiting local planewaves. The quantitative measure of such deflections is known as Boresight error. However there are various other bottlenecks of Radomes, such as: Bandwidth: The system bandwidth is limited by Radome bandwidth. The possible approach is to make use of metamaterial radome, with both relative permittivity and permeability close to 1, which is one of the main areas of current research. [20] [21] Metamaterial can be suitably designed to use as Radome. By embedding metamaterial structures inside a host dielectric medium, the desired material parameters of the composite material can be adjusted to desired values of interest. Although commercial metamaterial Radomes are not yet state of the art but antenna researchers are looking for following features in metamaterial radomes: The structure should be non-reciprocal for incoming and outgoing waves. Metamaterial radomes should enhance out of band signal rejection. Metamaterial radomes are useful for multiband radomes also. Metamaterial UWB radomes can also be developed.

#### VII. ANTENNA GROUND PLANE

Metamaterial ground planes also known as artificial magnetic conducting ground planes are widely used as the planar antenna ground planes in order to enhance the input impedance bandwidth. [22] Metamaterials ground planes find important applications in low profile cavity backing and isolation improvement in cavity backed antennas and microwave components respectively. Metamaterial ground planes provides high impedance surface that can be used to improve the axial ratio and radiation efficiency of low profile antennas located close to the ground plane surface. High impedance surface as the antenna ground plane can improve the input impedance matching High impedance surfaces not only can match the planar antennas impedances but they also can increase the gain of antenna as well [23] [24] [25].

#### VIII. CONCLUSION

The research work presented in this paper summarizes the recent developments and applications of metamaterials in antenna engineering. This paper has also highlighted potential future research directions in this field. However it will take collaborative efforts from researchers in antennas, physics, optics, material science electromagnetics, to ultimately exploit the potential of metamaterial technology through practical implementation.

#### IX. REFERENCES

- [1] Aycan Erentok et al, "Characterization of a Volumetric Metamaterial Realization of an Artificial Magnetic Conductor for Antenna Applications", IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION, VOL. 53, pp. 160-172, NO. 1, JANUARY 2005.
- [2] Silvio Hrbar et al, "Waveguide Miniaturization Using Uniaxial Negative Permeability Metamaterial", IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION, VOL. 53, pp. 110-119, NO. 1, JANUARY 2005.
- [3] Akira Ishimaru et al, "Electromagnetic Waves Over Half-Space Metamaterials of Arbitrary Permittivity and Permeability", IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION, VOL. 53, pp. 915-921, NO. 3, MARCH 2005.
- [4] Filiberto Bilotti et al, "Metamaterial Covers Over a Small Aperture", IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION, VOL. 54, pp. 1632-1643, NO. 6, JUNE 2006.
- [5] A. Dhouibi, S. N. Burokur and A. Lustrac,, "Compact Metamaterial-Based Substrate-Integrated Luneburg Lens Antenna," IEEE Antennas and Wireless Propagation Letters, vol. 11, pp. 1504-1507, 2012.
- [6] Filiberto Bilotti et al, "Equivalent-Circuit Models for the Design of Metamaterials Based on Artificial Magnetic Inclusions", IEEE TRANSACTIONS ON MICROWAVE THEORY AND TECHNIQUES, VOL. 55, pp. 2865-2873, NO. 12, DECEMBER 2007.
- [7] Filiberto Bilotti et al, "Design of Spiral and Multiple Split-Ring Resonators for the Realization of Miniaturized Metamaterial Samples", IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION, VOL. 55, pp. 2257-2267, NO. 8, AUGUST 2007.
- [8] Akram ahmadi et al, "All-Dielectric Metamaterials: Double Negative Behavior and Bandwidth-Loss Improvement", IEEE TRANSACTIONS, pp. 5527-5530, 2007.
- [9] S. N. Burokur et al, "Asymmetric left-handed metamaterial in microwave and infra-red regimes at normal incidence", IEEE TRANSACTIONS, pp. 3412-3415, 2007.
- [10] Ari J. Viitanen et al, "Properties of Evanescent Surface Waves in Plasma Slab with Application for Miniaturized Waveguides", IEEE TRANSACTIONS, pp. 4248-4252, 2007.
- [11] M.A.Antoniades and G.V. Eleftheriades, "Compact, Linear, Lead/Lag Metamaterial Phase Shifters for Broadband Applications," IEEE Antennas and Wireless Propagation Letters, vol. 2, issue 7, pp. 103-106, July 2003.
- [12] Shabnam Ghadarghadr et al, "Negative Permeability-Based Electrically Small Antennas", IEEE ANTENNAS AND WIRELESS PROPAGATION LETTERS, VOL. 7, pp. 13-17, 2008.

- [13] C.-J.Wang, C.F. Jou, and J.-J.Wu, "A novel two-beam scanning active leaky-wave antenna," *IEEE Trans. Antennas Propag.*, vol. 47, no. 8, pp. 1314–1317, Aug. 1999.
- [14] Y. Li, Q. Xue, E. K. Yung, and Y. Long, "The backfire-to broadside symmetrical beam-scanning periodic offset microstrip antenna," *IEEE Trans. Antennas Propag.*, vol. 58, no. 11, pp. 3499–3504, Nov. 2010.
- [15] Y. Li, Q. Xue, E. K. Yung, and Y. Long, "A fixed-frequency beam scanning microstrip leaky wave antenna array," *IEEE Antennas Wireless Prop. Lett.*, vol. 6, pp. 616–618, 2007.
- [16] S. K. Podilchak, A. P. Freundorfer, and Y. M. M. Antar, "Surfacewave launchers for beam steering and application to planar leaky-waveantennas," *IEEE Trans. Antennas Propag.*, vol. 57, no. 2, pp. 355–363, Feb. 2009.
- [17] Y. Li, M. F. Iskander, , Z. Zhang, , and Z. Feng, "A New Low Cost Leaky Wave Coplanar Waveguide Continuous Transverse Stub Antenna Array Using Metamaterial-Based Phase Shifters for Beam Steering," *IEEE Trans. Antennas Propag.*, vol. 61, no. 7, pp. 3511–3518, July. 2013.
- [18] *Antenna Theory - Analysis and Design* (Constantine A. Balanis) (2nd Ed) [John Wiley].
- [19] Jennifer T. Bernhard et al, "Characteristic mode analysis of shorted microstrip patch antenna", *IEEE TRANSACTIONS*, pp. 646-647, 2007.
- [20] Yoonjae Lee and Yang Hao, "Characterization of microstrip patch antennas on metamaterial Substrates loaded with complementary split-ring Resonators" Wiley Periodicals, Inc. *Microwave Opt Technol. Lett.* 50, pp. 2131–2135, 2008.
- [21] Siou-Jhen Lin et al, "Monopolar Patch Antenna With Dual-Band and Wideband Operations", *IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION*, VOL. 56, pp. 900-903, NO. 3, MARCH 2008.
- [22] Shing-Lung Steven Yang et al, "Frequency Reconfigurable U-Slot Microstrip Patch Antenna", *IEEE ANTENNAS AND WIRELESS PROPAGATION LETTERS*, VOL. 7, pp.127-129, 2008.
- [23] M. A. Jensen, J. W. Wallace," A Review of Antennas and Propagation for MIMO Wireless Communications", *IEEE Transactions on Antennas and Propagation*, vol. 52, no. 11, November 2004.
- [24] Yacouba Coulibaly et al, "Broadband Microstrip-Fed Dielectric Resonator Antenna for X-Band Applications", *IEEE ANTENNAS AND WIRELESS PROPAGATION LETTERS*, VOL. 7, pp. 341-345, 2008.
- [25] Hua-Ming Chen et al, "Microstrip-Fed Circularly Polarized Square-Ring Patch Antenna for GPS Applications", *IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION*, VOL. 57, pp. 1264-1267, NO. 4, APRIL 2009.