100% PNEUMATIC (ALL AIR), EXPLOSION PROOF OSX AUTOMATIC DOOR OPERATOR & INTERLOCK DOOR SYSTEM QUOTE FORM

(Formerly known as Stanley MAGIC-DOOR Pneumatic Door Operator)

Carey Automatic Door, LLC manufactures door operator systems which can be customized for hazardous swinging and sliding door applications. The entire system is driven by pneumatic cylinders and valves <u>without</u> the use of electrical or electronic components. Moving components are manufactured from non-sparking materials. Pneumatic exit devices compatible. Proven track record in environments with volatile chemicals. See attached description and customers served.

Considered the most intrinsically safe, reliable, durable and cost effective Automatic Door Operator in the industry since 1970!

Please use one form per set of doors:

1.	Is this a new installation or retrofit to an existing door?	
2.	Single door or pair of doors?	
	a.	Width, height & thickness of doors
	b.	Weight and type of doors
	C.	Fire door application
	d.	Are doors in place?

- 3. If **Swing** Door (Operators can be mounted inside or outside of hazardous room):
 - a. IN/PULL or OUT/PUSH application:




IN/PULL (doors swing under Operators)




(doors swing away from Operators)

b. Right Hand or Left Hand Swing for Single Door:

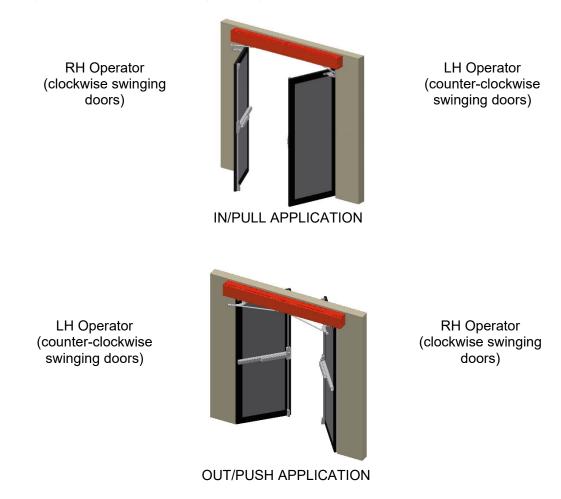

- c. *Side Clearance ______ Distance required between jamb and side wall for door bracket (small wall pocket may be required).
- d. *Height Clearance: top of door to ceiling or obstruction_____
- e. *Reveal Distance ______ Distance from back of operator case to inside surface of door in closed position. Varies with door thickness and hanging.



f. Hinge hung, swing clear, center pivot or offset pivot hinges?

*Critical dimension.

g. Are pneumatic exit devices required?

Carey to integrate into ALL AIR equipment. Pneumatic exit devices provide remote latch bolt retraction in hazardous areas where electrically operated devices would not be permitted. The air cylinder used in the device has a special actuating linkage that allows a mechanical override.

If exit devices are not present, manual latching is required to be removed from door.

- 4. If **Slide** Door (strongly recommend utilizing Carey track & hangers as they are specifically manufactured for hazardous areas; all moving components non-sparking):

 - b. Height clearance: top of door to ceiling or obstruction _____
 - c. Pneumatic safety/reversing edge (strongly recommended):

If Carey Slide Door Track and Hangers are required:

- d. Masonry opening width:
- e. 4" lap present on each side of door: _____
- f. Wall thickness to mount track:
- g. Door gauge: _____
- 5. **Manual Controls** (shall be either or a combination of the following):
 - a. ALL AIR Palm Button Activation where surface mounted palm buttons are required.
 - b. ALL AIR Pull Cord Activation for use in overhead applications and where wheeled traffic exists.





6. Activation Options for ALL AIR Operators:

- a. Standard Activation: Push palm button or pull cord to open, hold open with 0-30 second time delay, automatic close: Spring Close (Single Acting), Power Close (Double Acting) depending on weight of door or Counterweight Close (Sliding Fire Door)
- b. Optional Activation: Push palm button or pull cord to open, door stays open, push to close

- 7. **Interlock Door Systems** for swinging and sliding door applications: provides for opening of one set of doors and latching of the other set to prevent simultaneous opening of both sets of doors.
 - a. Distance between doors _____
 - b. Length and width of airlock room _____
- Solvents in area/NEMA Classification?
 If Class 1, Division 1 or 2 Classification, Carey Automatic Door, LLC strongly recommends entire floor be 100% Pneumatic (ALL AIR), Explosion Proof as there is a remote chance that mixing of the air and gas could occur. Therefore, <u>ALL</u> equipment should be ALL AIR, Explosion Proof.
- 16. How referred to Carey Automatic Door, LLC?

Name	Date
Company	Job Name & Door No.
Address	

Phone Number

Email

100% Pneumatic (ALL AIR), Explosion Proof Automatic Door Operators & Interlock Door Systems are ideal for: Pharmaceutical, Chemical, Manufacturing, Industrial, Ammunition & Ordinance Facilities, Oil Refineries, Industrial Bakeries, Coal Preparation Plants, etc.

Please feel free to contact us at (203) 267-4278 if you should have any questions. Thank you for the opportunity to quote this job.

Virtually maintenance free for 20 - 30+ years!

Carey Automatic Door, LLC

www.careydoor.com

100% Pneumatic (ALL AIR), Explosion Proof OSX Door Operator

Customers Served Since 1970!

3M Company Abbott Pharmaceuticals Amgen, Inc. Anagram International Aspen Aerogels AstraZeneca Pharmaceuticals **Becton Dickinson** Boehringer Ingelheim Corporation BOEING **BP** Exploration, Inc. Bristol-Myers Squibb Corpus Christi Army Depot Covidien Crane Army Ammunition Activity Cytec Industries Dow Corning Corporation DuPont, Inc. Eastman Chemical Company Estee Lauder Genzyme Biosurgery **Gilead Sciences** Goodrich Fuel & Utility Systems Grain Processing Hospira Pharmaceuticals Indiana Michigan Power Company IST Industrial Summit Technology Lockheed Martin Corporation Los Alamos National Laboratory Mallinckrodt Pharmaceuticals Markem CIJ Manufacturing McAlester Army Ammunition Plant Merck & Co., Pharmaceuticals **MerCruiser** Novartis Consumer Health Ortho Clinical Diagnostics (Johnson & Johnson) Palisades Nuclear Power Plant Patheon Pharmaceuticals Philip Morris Company **PPG** Aerospace **Raytheon Missile Systems Regeneron Pharmaceuticals** Sandia National Laboratories Sigma-Aldrich Corporation Solvay The Dow Chemical Company **United Nations Headquarters** Woodward Governor Company Wright Patterson Air Force Base Wyeth Ayerst Laboratories Xerox Corporation