

# BER Reduction for Different Type of Optimization Technique: A Review

Gorika Sharma (M.Tech Scholar)<sup>1</sup>, Surender Kumar Grewal<sup>2</sup>  
<sup>1,2</sup>Deenbandhu Chottu Ram University Of Science and Technology,  
 Sonapat (Haryana)

**Abstract-** A demand for high-speed mobile wireless communications is growing at a very fast rate. PSO OFDM technology is a key technique for achieving the high data rate and spectral efficiency requirements for wireless communication systems. Frequency division Multiplexing (PSO OFDM) has emerged as a successful air-interface technique. The Frequency division Multiplexing was originally developed from the multi-carrier modulation techniques used in high Frequency military radios. This paper presents, a simulink based simulation system is implemented using Particle swarm optimization (PSO) to study the performance analysis of Bit Error rate (BER) Vs Signal to Noise ratio (SNR).

The model of PSO OFDM with Rician fading channel using simulink in MATLAB is discussed and is used for performance enhancement of the PSO OFDM with QPSK and QAM modulation schemes and channel condition. The throughput and packet error rate are used to evaluate the performance of MAC layer with the change in physical layer parameter. The performance analysis of different technique used in the QAM PSO OFDM is compared by visualizing the BER vs SNR curve.

**Keyword-** PSO OFDM (Frequency division Multiplexing), QAM, PSO, etc.

## I. INTRODUCTION

Increasing in telecommunications services that demand large amounts of bandwidth. Services such as interactive multimedia, video conferencing and streaming audio have made the capacity of the existing optical fiber systems insufficient. To increase this capacity, time division multiplexing (TDM) has been used traditionally. However, TDM has a few drawbacks. The important is that the existing electronic technology allows multiplexing only up to about 10 Gb/s. Thus; an alternative optical multiplexing technique that avoids the 10Gb/s electronic bottleneck is very attractive. PSO OFDM is one such promising technique that can be used to exploit the huge available bandwidth of the optical fiber. [1] In PSO OFDM, the optical transmission spectrum is divided into a number of no overlapping Frequency bands, with each Frequency supporting a single communication channel operating at peak electronic speed. Thus, by allowing multiple PSO OFDM channels to coexist on a single fiber, the huge

bandwidth can be tapped into. PSO OFDM is a technique for simultaneous transmission of two or more optical signals on the same fiber. The signals from different sources are combined by a multiplexer and fed into an optical fiber which is the transmission medium. At the receiving end, different signals are separated by a de multiplexer and detected by photo detectors. The PSO OFDM scheme increases the transmission capacity of optical communication systems considerably. The two configurations of PSO OFDM systems that are possible are the one-way and the two-way (bidirectional optical fiber) transmission systems as illustrated in Figure (1), while the one-way system requires only one receiver or one transmitter per channel at each end, the two-way system requires both receiver and transmitter at each end of every channel. Optical multiplexers and de multiplexers may be classified into Frequency selective and Frequency nonselective devices. The Frequency selective devices are either active or passive. The active devices are implemented using multi-Frequency light Sources or multi Frequency photodiodes [2].

The basic concept behind digital modulation is to identify efficient schemes taking M different symbols in a given digital alphabet and transforming them into waveforms that can successfully transmit the data over the transmission channel. There are three basic types of modulation schemes which are follows as

1. Frequency shift keying (FSK)
2. Amplitude shift keying (ASK)
3. Phase-shift keying (PSK).

The remainder of this purpose as under section II describes the state of art, section III methodology. The paper is concluded in section IV

## II. LITERATURE REVIEW

ANGEL DAVID TORRES PALENCIA: "Linear Effects present in a system of radio over optical fiber using Frequency division multiplexing" Because of the large bandwidth that the optical fiber offers as transmission medium of information and the flexibility of communication of the wireless systems, a new mixed infrastructure called radio over fiber system (Radio over Fiber, RoF) have been developed, these have been characterized for implementing division multiplexing Frequency (PSO OFDM) and these work with radio carrier

signals in the band of extremely high frequencies (extremely high frequency, EHF.)[1]

T.P. SUREKHA, T. ANANTHAPADMANABHA, C. PUTTAMADAPPA: Members, IEEE, Modeling and Simulation can play an important role during all phases of the design and engineering of communication systems. Frequency division multiplexing Multiplexing (PSO OFDM) was originally developed from the multi-carrier modulation techniques used in high Frequency Military radios. BER curve with Model simulation in is compared with BER Tool curve. BER Tool is a Graphical User Interface (GUI) for analyzing bit error - rate statistics of a communication model. BER Tool helps us to generate and analyze the BER data for a given system with theoretical plot [2].

SAI KRISHNA BORRA; SUMAN KRISHNA CHAPARALA: A Frequency division Multiplexing (PSO OFDM) scheme offers high spectral efficiency and better resistance to fading environments. In PSO OFDM the data is modulated using multiple numbers of sub-carriers that are orthogonal to each other because of which the problems associated with other modulation schemes such as Inter Symbol Interference (ISI) and Inter Carrier Interference (ICI) are reduced. This paper deals with the analysis of PSO OFDM System utilizing different modulation techniques (QAM and BPSK) over Rayleigh, Rician and Additive White Gaussian Noise (PSO) fading environments with the use of pilot aided arrangement and finally the results are conveyed.

In this paper we compare the performance in terms of BER using different modulation schemes on Rayleigh, Rician and PSO Channel. This system model that is presented in this paper uses BPSK and 16-QAM as sub-carrier modulation technique[3]

ASHUTOSH KUMAR MISHRA, RASHMI PANDEY: This review work based on the Performance analysis of OAM-PSO OFDM system in PSO Channel. In Digital communication system with multi carrier modulation technique can play very important role in all phase of designing and engineering. In this work we discuss about the performance analysis of 16QAM-PSO OFDM system. We compare the performance analysis of different technique used in the 16 QAM PSO OFDM and discuss the BER vs SNR Ratio.

In the previous work which was discuss in literature review shows that there is need to improvement in system in terms of Noise level. If Noise level will the BER should be decreased so that in higher level QAM will be implemented at higher noise level such as 32 QAM, 64 QAM as so on. The recent advancement have improve the bit error rate some extant but the system that analyzed for more no of carriers that decreased the ISI and ISF using deferent technique [4].

K.SHAMGANTH AND M.P.REENA: Increasing demand for high-performance 4G broadband wireless is enabled by the use of multiple antennas at both transmitter and receiver ends. Multiple antenna technologies enable high capacities suited

for Internet and multimedia services, and also dramatically increase range and reliability. The combination of multiple-input multiple-output (MIMO) signal processing with Frequency division multiplexing (PSO OFDM) is regarded as a promising solution for enhancing the data rates of next-generation wireless communication systems operating in Frequency selective fading environments. In this paper, we focus mainly on Internet users in hotspots like Airport etc. requiring high data rate services. A high data rate WLAN system design is proposed using MIMO-PSO OFDM. In the proposed WLAN system, IEEE 802.11a standard design is adopted but the results prove a data rate enhancement from the conventional IEEE 802.11a.

In this paper, a high data rate WLAN system design is proposed using MIMO-PSO OFDM, in which IEEE 802.11a standard design is adopted and the results prove a data rate enhancement from the conventional IEEE802.11a. Shao-Hua Chu , Hsin -Piao Lin and Ding - Bing Linin their paper explorer about excess delay spread and inter-symbol interference problems in indoor radio propagation channel, performance of WLAN is also evaluated using Frequency selective fading channel. In their paper they had used montecarlo simulation based on the IEEE 802.11a physical layer specification. The paper analyzes the performance of using Omniad switch-beam antenna in a real office indoor environment. Compared with using omni antenna, the simulation results show that utilizing switch-beam antenna in AP the BER performance improve about 2dB in light-of-sight (LOS) case, and 6dB in non – light – of-sight (NLOS) case [5].

MEHDI AHMADI, EHSAN ROHANI, POOYA MONSHIZADEH NAEENI AND SIED MEHDI FAKHRAIE: IEEE 802.22, also called Wireless Regional Area Network (WRAN), is the newest wireless standard being developed for remote and rural areas. In this paper an overview of the standard and more specifically its PHY layer is introduced. In order to evaluate the performance of the system, we model the PHY layer in MATLAB/SIMULINK and extract the Bit Error Rate (BER) of the system for different code rates and modulation schemes with noisy channel.[6]

### III. METHODOLOGY

Simulink, developed by the Math works, is a tool for multi-domain simulation and Model-based design for dynamic and communication systems. Communication block set of simulink is helpful in simulating the modeling. The simulation model of 16 QAM- PSO OFDM is the input data bits are mapped onto corresponding QAM symbols using grey coding which the Constellation diagram for 16-QAM system. Where binary words are assigned to adjacent symbol states and differ by only one digit. Complex modulation scheme are best viewed using a scatter diagram. The scatter diagram allows us

to visualize the real and imaginary (in-phase and quadrature) components of the complex signal.

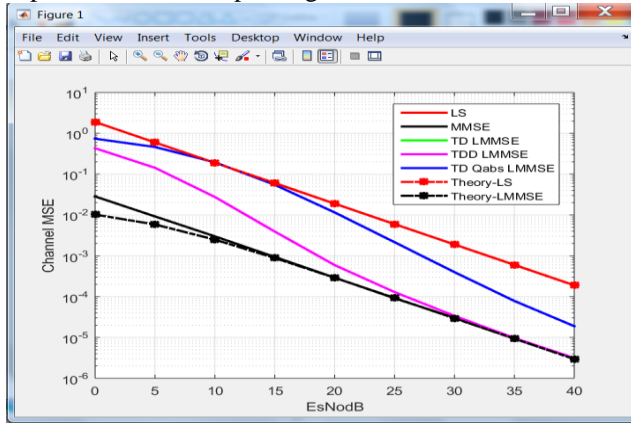


Fig.1: Channel MSE and E/N Plot.

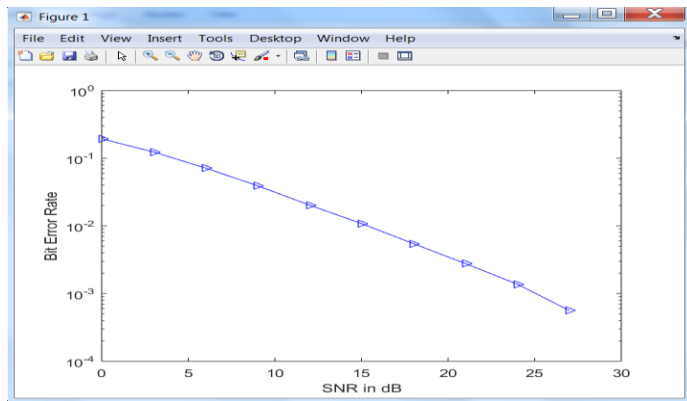


Fig.2: BER and SNR channel error reduction.

#### IV. CONCLUSION

In the previous work which was discussed in literature review shows that there is a need of improvement in system in terms of Noise level .as we have seen the results of base paper in terms of simulation model (Fig4.19) and the graph of BER Vs  $E_b/N_o$  (Fig4.20), our modified work has enhanced the performance of the new designed simulation model. Higher level QAM is implemented by which the noise level is decreased. To compare the performance in terms of BER & Packet error Vs. Doppler shift using different modulation schemes on PSO Channel and Rician Channel, This system model that is presented in this thesis QAM-PSO OFDM in this system model we adopted PSO OFDM, which is advantageous and so shows the better performance.

Table 1 Parameters

K value	Allow of SNR
K=1	0.010

K=10	0.015
K=100	0.045

The simulation results are provided and from which we can evidently conclude that the QAM gives better performance under PSO and Rician Channel compared to other modulation scheme's and channels. Performance of the system is analyzed under different K factors with different FEC techniques. Simulation results show satisfactory results in terms of better BER values. The throughput and packet error are used to evaluate the performance of the model with different k factor parameter. The performance of MAC Layer is improved with the change in physical layer parameter.

A lot of works can be done for future optimization of Wireless communication especially in PSO OFDM system.

- This work can be extended to increase the performance of the QAM-PSO OFDM system by using the other channel types and other variants of the convolution encoder (2/3, 3/4).
- Furthermore work can be carried by using Power line communication system as the channel. The transfer characteristic performance analysis of the channel is worth being invested.
- Another implementation can be studied by using pilot-based channel. The performances and properties can be tested and verified.
- MIMO is the emerging field these days. MIMO-PSO OFDM has become a research hotpot in the world.

#### V. REFERENCES

- [1]. Angel David Torres Palencia "Linear Effects present in a system of radio over optical fiber using Frequency division multiplexing", 978-1-4577-0856-5/11/\$26.00 ©2011 IEEE
- [2]. Sai Krishna Borra; Suman Krishna Chaparala, performance evolution of PSO OFDM system with Rayleigh, rician and PSO channels, Volume 3, Issue 3, March 2013.
- [3]. Ashutosh Kumar Mishra, Rashmi Pandey, A Review on Modeling and Performance of QAM-PSO OFDM System with PSO Channel, Volume 4, Issue 3, March 2014.
- [4]. K.Shamganth and M.P.Reena, Capacity Enhancement in WLAN using MIMO, Special Issue of IJCCT Vol.1 Issue 2,3,4; 2010 for International Conference [ACCTA-2010], 3-5 August 2010.
- [5]. Mehdi Ahmadi, Ehsan Rohani, Pooya Monshizadeh Naeni and Sied Mehdi Fakhraie, "Modeling and Performance Evaluation of IEEE 802.22 Physical Layer". 2<sup>nd</sup> International Conference on Future Computer and Communication (ICFCC)-2010, Wuhan, ISBN: 978-1-4244-5821-9, 21-24 May 2010, Vol 3 V3-62 - V3-66, INSPEC Accession Number : 11538274
- [6]. Abhishek Katariya, Neha Jain, Amita Yadav, PERFORMANCE ELEVATION CRITERIA OF RS CODED PSO OFDM TRANSMISSION OVER NOISY CHANNE, International Journal of Soft Computing and Engineering (IJSCE) ISSN: 2231-2307, Volume-1, Issue-3, July 2011.

- [7]. Enis Akay and Ender Ayanoglu, High Performance Viterbi Decoder for PSO OFDM Systems.
- [8]. Performance of Block Turbo Coded PSO OFDM with 16-QAM Modulation in Rayleigh Fading Channel
- [9]. Spyridon K. Chronopoulos, In depth analysis of noise effects in Frequency division multiplexing multiplexing systems, utilising a large number of subcarriers IEEE 802.16-2006: "IEEE standard for Local and Metropolitan Area Network- Part 16: Air Interface for Fixed Broadband Wireless Access Systems"